



## ANDERSON GREENWOOD

### Product Overview

Designed for use with multiport valves and 2-valve manifolds to increase site versatility, the GA-HP Swivel Gauge Adapter allows positioning of pressure gauges in any direction through 360 degrees. The GA-HP Gauge Adapter, supplied in SS and Monel®, is available in a variety of sizes and thread types for maximum flexibility. The standard types are male and female threaded and are available with NPT. Connection sizes include 1/4-inch, 3/8-inch and 1/2-inch. Suitable for pressures up to 10,000 psig [689 barg] and temperatures up to 1000°F [538°C], the GA-HP is available with trim to meet the requirements of NACE MR0175-latest revision.


### Features and Benefits

- Versatile design available in a variety of sizes and thread types gives complete design flexibility.
- Choice of body materials manufactured in SS and Monel® for a wide range of applications.
- Gauge positioning enables easy viewing of the gauge in any direction through 360 degrees.
- High pressure applications: of up to 10,000 psig [689 barg] can be met.



# Hand Valves

## GA-HP Specifications

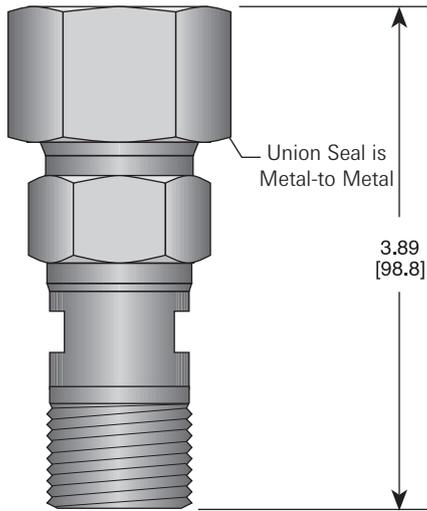

### Standard Materials<sup>1,2</sup>

Adapter	Body
SS	A479 316
Monel <sup>®</sup>	Monel <sup>®</sup> R405

### Pressure and Temperature Ratings

GA-HP	
10,000 psig @ 200°F	[689 barg @ 93°C]
1500 psig @ 1000°F	[103 barg @ 538°C]

### Ordering Information

GA-HP S - 4 4 - SG

### Materials of Construction

- S - SS
- M - Monel<sup>®</sup>

### Inlet Connections

- 4 - 1/2-inch MNPT

### Outlet Connections

- 4 - 1/2-inch FNPT
- 4M - 1/2-inch MNPT

### Options

- SG - Sour Gas meets the requirements of NACE MR0175-latest revision
- SP - Special Requirements - please specify

### Notes

1. For other material requirements, please consult the factory.
2. Approximate adapter weight 0.4 lb [0.2 kg]. Dimensions, inches [mm]