



POMPE ZANNI®

50Hz

Single stage double suction **Split casing centrifugal pump**



Technical catalog



INDEX

GENERAL DATA	5
- APPLICATION	
- STRUCTURE DESIGN	
- SPECIFICATIONS	
- STRUCTURE DESIGN	
DESIGNATION	6
- MODEL CODE DESIGNATION	
CONFIGURATION FEATURES	7
PUMP AND MOTOR ARRANGEMENT	8
- ARRANGEMENT	
- DIRECTION OF ROTATION AND FLOW DIRECTION	
STANDARD MATERIALS	9
TECHNICAL DATA	10
- SHAFT DIAMETER AND SEAL	
- PRESSURE LIMITS	
- IMPELLER AND NOZZLE	
- STRUCTURE DESIGN	
- SPEEDS	
- VIBRATIONS	
- PAINT SPECIFICATIONS	
- ARRANGEMENT	
DIMENSIONS	15
- BARE SHAFT PUMP DIMENSIONS	
- FLANGE DIMENSIONS	
- HORIZONTAL PUMP WITH MOTOR	
- VERTICAL PUMP WITH MOTOR	
SECTIONAL VIEW	25
- ASSEMBLY	
- SOFT PACKED STUFFING BOX	
- MECHANICAL SEAL	
- ROTOR	
- BEARING	
- BEARING WITH OIL LUBRICATION	
- BEARING WITH WATER COOLING	
RECOMMENDED SPARE PARTS	33
SUPPLY NOTES	34
- SCOPE OF SUPPLY	
- GUARANTEE, TESTING AND QUALITY CONTROL	
ORDER DATA	35
- PUMP ORDER DATA	
- MOTOR ORDER DATA	
PERFORMANCE RANGE	36
PERFORMANCE CURVES	38
- 2980 rpm	38
- 1480 rpm	48
- 980 rpm	86
- 740 rpm	101



POMPE ZANNI®



© 2014 - POMPE ZANNI - Italy

This catalog is the exclusive property of the company POMPE ZANNI.
Therefore is forbidden the reproduction, disclosure, transfer to other person, even partial,
of this catalog in any form without written permission from the company POMPE ZANNI.

Single stage double suction Split casing centrifugal pump

Application

Clean water or medium similar to water in physical and chemical properties:

- Water supply, drainage, irrigation, power station, construction.
- Hydropower station, fire-fighting, air-conditioning, building industry.
- Marine applications, all kinds of water for industrial processes.

Abrasive medium:

- Sand water, oxide scale water, others.

Corrosive medium:

- Desalination, bittern, sea water, others.

High temperature medium:

- Heating network circulating water, all kinds of chemical liquid.

Petroleum and chemical liquids (according to API610 BB1):

- Crude oil and refined oil, oil loading and unloading of oil terminal, all kinds of chemical liquid.

Structure design

PZSC is single stage, axially split volute casing pump with double suction impeller, for horizontal and vertical installation.

Drive shaft end of the horizontal pump optionally on the left or right side. flanges drilled to GB, ISO, DIN, BS or ANSI.

Specifications


CAPACITY (Q):	50 ÷ 20 000 m ³ /h
HEAD (H):	10 ÷ 230 m
SUCTION DIAMETER:	100 ÷ 1400 mm
DISCHARGE DIAMETER:	80 ÷ 1200 mm
OPERATING PRESSURE (P):	≤ 5 MPa
OPERATING TEMPERATURE (t): ...	-15 °C ÷ +200 °C (above 80 °C, contact POMPE ZANNI)
ABRASIVE MEDIUM:	≤ 4 %



Model code designation

PZSC 200 - 125 - 290 V

Vertical Design ("V" = horizontal)
Nominal Impeller diameter - **DI** (mm)
Discharge diameter - **DN** (mm)
Suction diameter - **DS** (mm)
Series

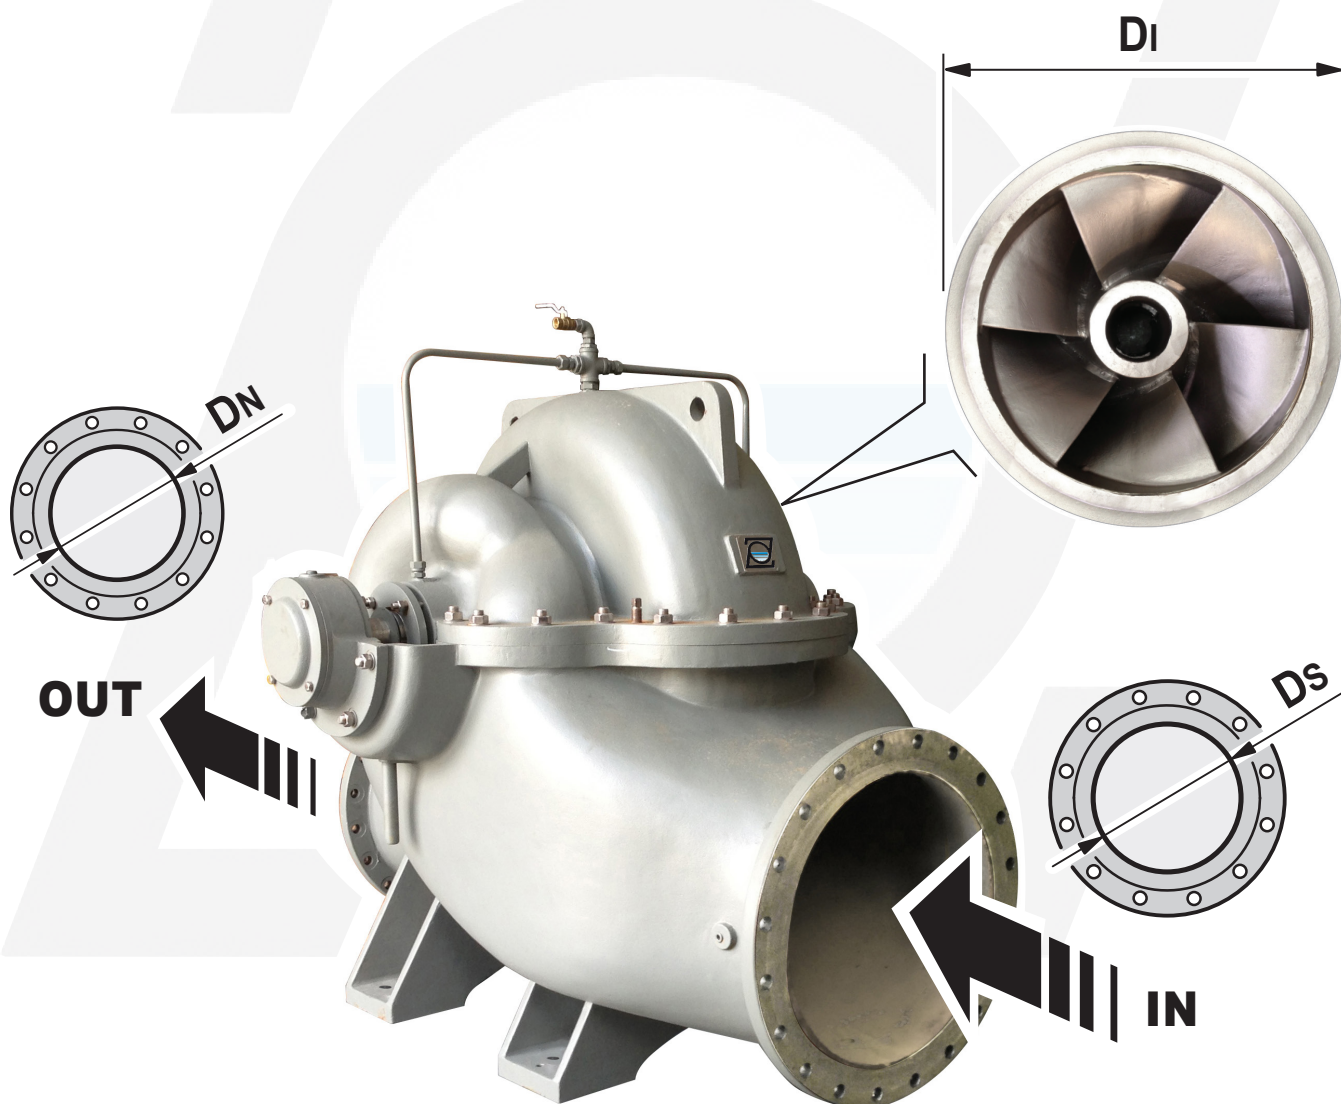



CASING

In-line axially split design which permits removal of the complete rotor without moving the pipe and motor.

Short distance between bearings.

Leak-tight due to compact joint flange with long, prestressed bolts.

Counter-rotation possible with similar parts.

Double volute casing reduces radial forces on the impeller and consequently the bearing loads.

Easy mounting self-aligning upper casing.

Flange drilled to ISO, DIN, BS or ANSI.

Smooth surface inside and epoxy coating as required.

Replaceable wear rings protect the casing at the impeller running clearances.

Heavy duty casing design for high working pressure.

IMPELLER

Computer-optimized double entry impellers.

Minimal axial thrust due to double-entry impeller.

Impeller is statically and dynamically balanced according to ISO1940.

Optional impeller wear rings.

SEAL

Asbestos-free, potable water quality softpacked stuffing boxes.

Unbalanced mechanical seal, according to DIN 24960.

Balance mechanical seal for operating pressure >16 bar on required.

Cartridge-type mechanical seal on required.

BEARING

SKF covered, sealed for life grease lubricated antifriction bearings for long service life.

Open gland, enough space for service activities.

Optional: oil lubrication with constant level oiler.

HORIZONTAL: grease lubricated ball bearings on both side, oil lubrication is optional.
For the big size, sliding bearing is available.

VERTICAL: grease lubricated ball bearing.

SHAFT

Heavy duty shaft completely sealed and dry for zero corrosion.

Short and rigid with negligible vibrations.



Replaceable shaft protecting sleeves.

No threads exposed to pumped medium, long operating life and no corrosion.

Adjustment-free assembly.

Quick and easy assembly/dismantling of the rotor components due to elastically prestressed mountings.



Maximum interchangeability shafts design entire series for 2900 rpm and 1450 rpm model just six shafts and six bearings assemblies.

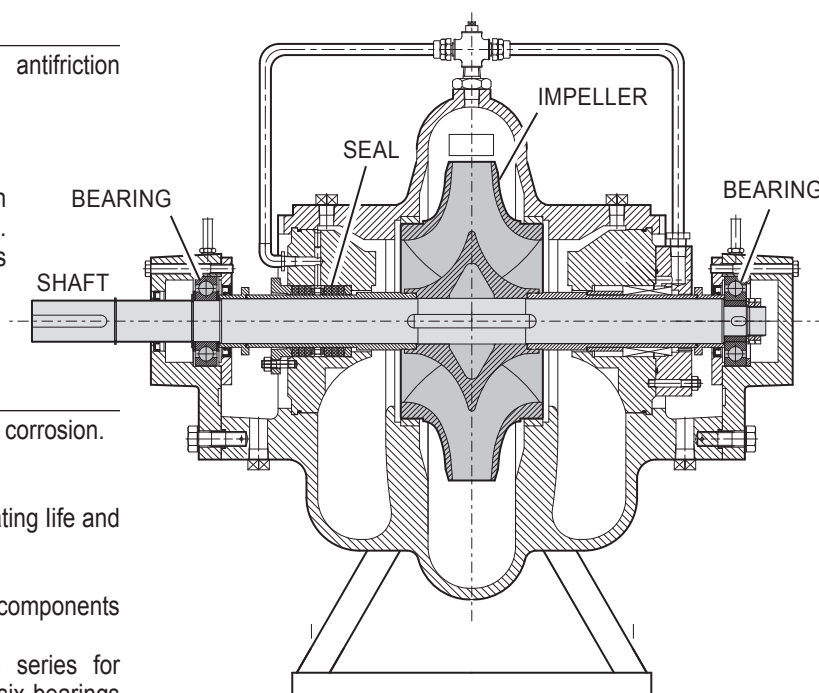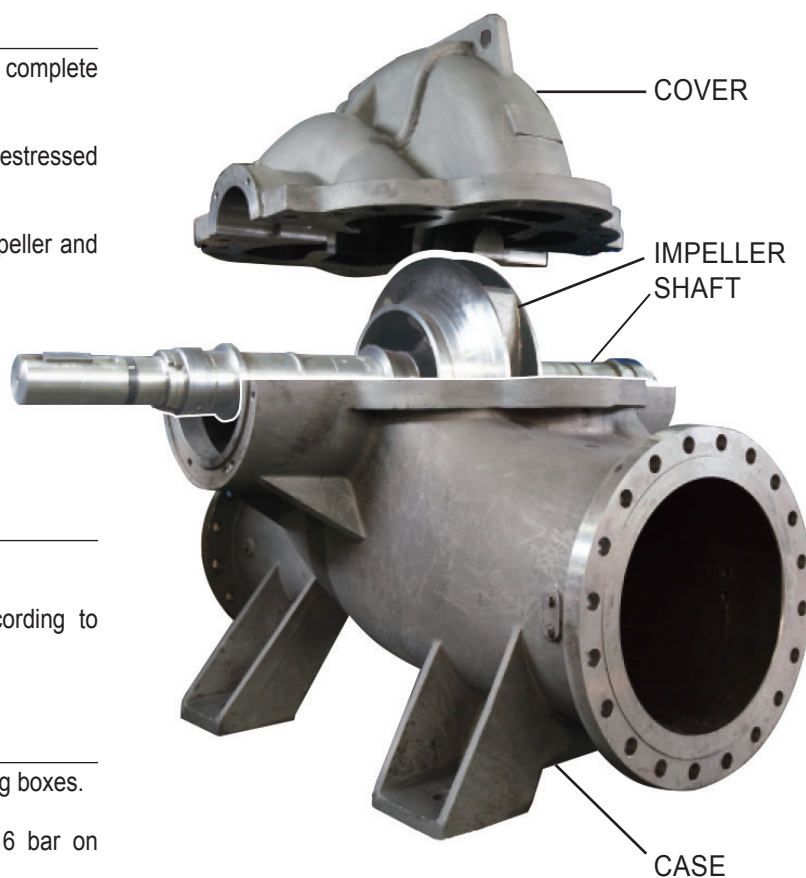




Arrangement

HORIZONTAL

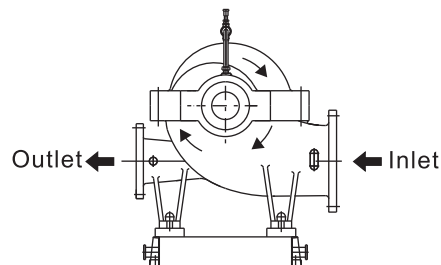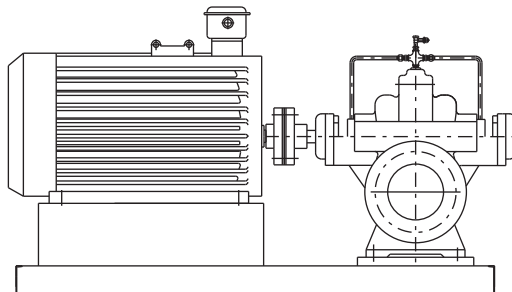


(Note: POMPE ZANNI chooses the **TB** or **TK** according to the motor size.)

VERTICAL

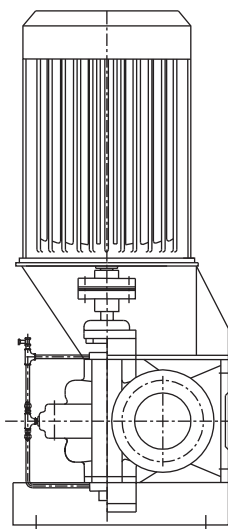


TB

(motor weight < 800 kg)

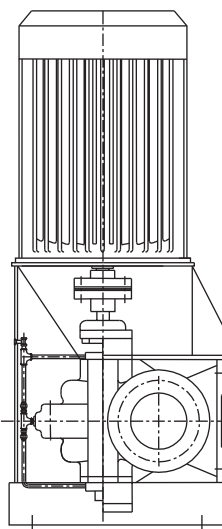


TK

(motor weight > 800 kg)

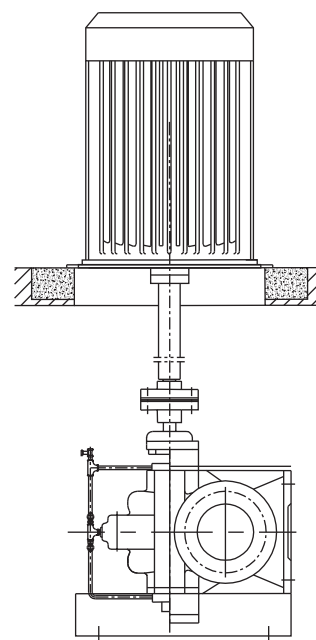


TJ

Direction of rotation and flow direction



Anticlockwise
viewed from the drive end


CCW



Clockwise
viewed from the drive end


CW

HORIZONTAL



Anticlockwise
viewed from the drive end

CCW




Clockwise
viewed from the drive end

CW

VERTICAL

MEDIUM / NAME	CLEAR WATER	WATER WITH MUD AND SAND / OXIDE SCALE WATER / SEWAGE / SALINE WATER	SEA WATER	HOT WATER	PETRO-CHEMICAL LIQUIDS
CASING	Cast Iron	Nickel chromium cast iron / Wear resistant cast iron / Cast steel + Wear-resistant coating	Duplex stainless steel	Ductile CI / Cast steel / Stainless steel	According to API610 I-1,I-2, S-5,S-8, C-6,A-7, A-8,D-1, D-2
IMPELLER	CI / Bronze / Stainless steel	Ductile CI / SS420 / Stainless steel	Duplex stainless steel	SS420 / Stainless steel	
BEARING HOUSING	Cast Iron	Cast Iron	Cast Iron	Cast Iron	
SHAFT	SS420	SS420	Duplex stainless steel	SS420 / Stainless steel	
WEAR RING	Cast Iron	Ductile CI / SS420	Bronze / Duplex stainless steel with hardening treatment	Ductile CI / Cast steel	
SHAFT SLEEVE	SS420	SS420	Duplex stainless steel	SS420	
SHAFT SEAL	Packing / Mechanical seal	Packing / Mechanical seal	Mechanical seal	Mechanical seal	
FLUSHING PIPELINE	Q235-A	Q235-A	316L	Q235-A/stainless steel	

NOTE: the materials of pump parts are chosen according to the pressure rating, application, medium, operating temperature and customer requirements etc.

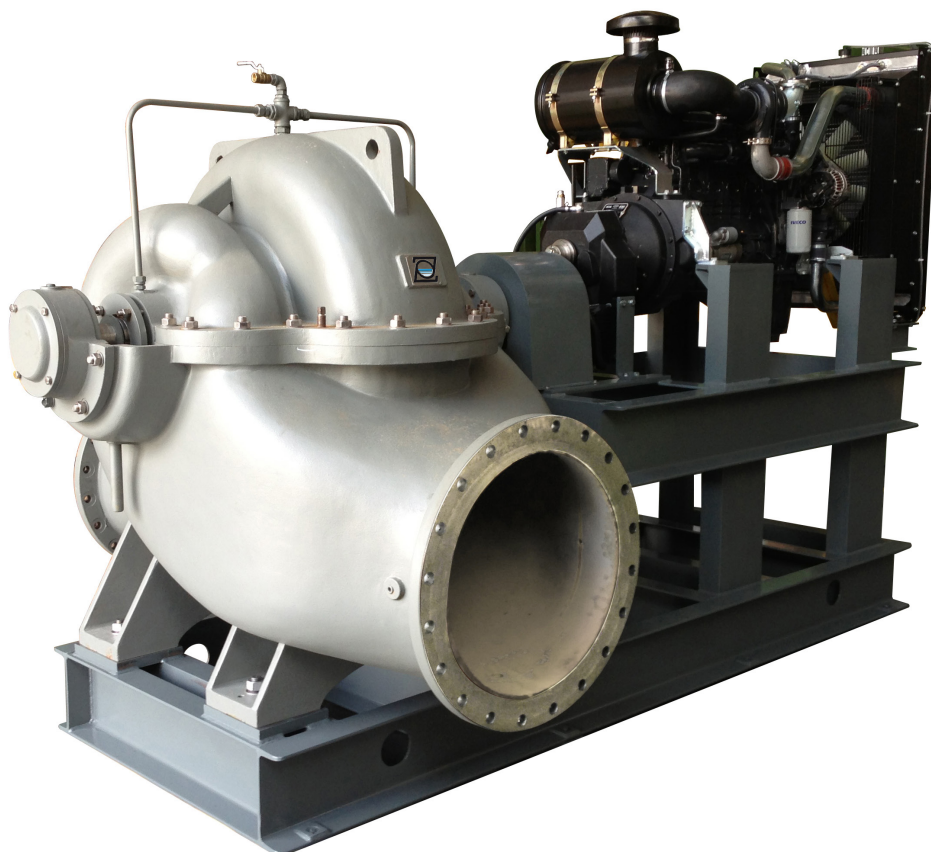

**SHAFT DIAMETER - SHAFT SEAL AND BEARING**unit: **mm**

MODEL PZSC	SHAFT Ø	NOMINAL Ø PACKING / MECHANICAL d	SEALED CHAMBER D	SEALED TYPE L	BEARING SEAL	MECHANICAL STRUCTURE	PUMP
125-80-210	35	50	75	72	6307 SKF	M74N/50-G92-Q2BVV (Mechanical Seal Type B)	Horizontal Installation TYPE - C
125-80-270							
125-80-350							
150-100-250							
150-100-320							
150-100-400							
200-125-240	45	60	85	82	6309 SKF	M74N/60-G92-Q2BVV (Mechanical Seal Type B)	Horizontal Installation TYPE - C
200-125-300							
200-125-380							
200-125-480							
200-150-290							
200-150-360							
200-150-460	55	70	95	85	6311 SKF	M74N/70-G92-Q2BVV (Mechanical Seal Type B)	Horizontal Installation TYPE - C
200-150-570							
250-200-340							
250-200-430							
300-250-270							
300-250-280							
250-200-530	65	80	110	93	6313 FAG	M74N/80-G92-Q2BVV (Mechanical Seal Type B)	Horizontal Installation TYPE - C
250-200-660							
300-250-390							
350-300-310							
350-300-330							
300-250-490	75	90	120	92	6315 SKF	M74N/90-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
300-250-610							
400-300-450							
400-350-360							
400-350-380							
450-450-350							
500-400-400							
500-400-420							
500-400-570							
300-250-780	85	110	150	130	6318 SKF	H75N/110-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
400-300-570	85	110	150	130	6317 FAG	M74N/110-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
400-300-700							
400-350-520							
500-400-675	100	135	180	150	NU321/6321 SKF	M74N/135-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - B
500-400-540							
500-400-660							
500-300-790							
600-400-740							
600-450-640							
700-500-670							
700-600-600							
700-600-680							
500-300-780	115	150	195	180	NU324/6324 SKF	M74N/150-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
500-300-920							
600-400-850							
700-600-740							
600-500-520	80	115	160	170	6317 FAG	M74N/115-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
600-500-550	80	115	160	170	6320 SKF	M74N/115-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
600-500-580							
700-500-940	130	170	215	176	NU328/6328 SKF	M74N/170-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - A
800-700-750	120	160	205	170	NU326/6326 SKF	M74N/160-G92-Q2BVV (Mechanical Seal Type A)	Horizontal Installation TYPE - B

NOTE: above values are valid for the pumps under normal pressure and temperature, if the medium temperature is more than 80 °C and the pressure limits in the following table (Pressure limits), please contact POMPE ZANNI.

Pressure limits

STANDARD TEST PRESSURE:


1 x H duty point + SUCTION PRESSURE

MODEL PZSC	PERMISSIBLE OPERATING PRESSURES
	MPa
125-80-210	1.6
125-80-270	1.6
125-80-350	1.6
150-100-250	1.6
150-100-320	1.6
150-100-400	1.6
200-125-240	1.6
200-125-300	1.6
200-125-380	1.6
200-125-480	1.6
200-150-290	1.6
200-150-360	1.6
200-150-460	1.6
200-150-570	2.5
250-200-340	1.6
250-200-430	1.6
250-200-530	1.6
250-200-660	2.5
300-250-270	1.6
300-250-280	1.6
300-250-390	1.6
300-250-490	1.6
300-250-610	2.5
300-250-780	3.0
350-300-310	1.6
350-300-330	1.6

MODEL PZSC	PERMISSIBLE OPERATING PRESSURES
	MPa
400-300-450	1.6
400-300-570	1.6
400-300-700	2.5
400-350-360	1.6
400-350-380	1.6
400-350-520	1.6
450-450-350	1.0
500-300-790	4.0
500-300-920	2.5
500-400-400	1.6
500-400-420	1.6
500-400-540	1.6
500-400-570	1.0
500-400-660	2.5
500-400-675	1.0
600-400-740	1.6
600-450-640	1.6
600-500-520	1.0
600-500-550	1.0
600-500-580	1.0
700-500-670	1.6
700-500-940	2.5
700-600-600	1.0
700-600-680	1.0
700-600-740	1.6
800-700-750	1.0

NOTE: values are valid for casing materials cast iron, for higher values, the other materials with better strength are available and consult POMPE ZANNI.

Impeller and nozzle

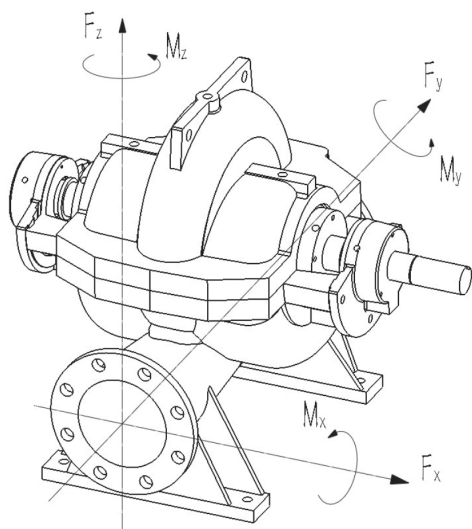
NOTE:

values are valid for casing materials cast iron, for casing material ductile cast iron use 1.4-fold value and for cast steel use 1.7-fold value. If require for the dimension of pump wich is not shown in the above table, contact POMPE ZANNI.

MODEL PZSC	Impeller Dimensions(mm)		Permissible Nozzle forces Fx, Fy, Fz N	Permissible Nozzle moments Mx, My, Mz Nm
	Free passage +/-10%	Max. Diameter		
125-80-210	30	216	800	500
125-80-270	25	270		
125-80-350	22	345		
150-100-250	30	254	1000	700
150-100-320	24	325		
150-100-400	21	423		
200-125-240	48	250	1500	1000
200-125-300	37	301		
200-125-380	35	395		
200-125-480	29	491	2000	1500
200-150-290	52	290		
200-150-360	44	370		
200-150-460	35	460	2500	2000
200-150-570	32	585		
250-200-340	57	338		
250-200-430	52	426	4000	2750
250-200-530	40	530		
250-200-660	38	665		
300-250-270	119	302		
300-250-280	96	321		
300-250-390	70	395		
300-250-490	60	490		
300-250-610	45	610		
300-250-780	42	770		
350-300-310	132	310		
350-300-330	101	350	5000	3000
400-300-450	81	450		
400-300-570	67	580		
400-300-700	65	700		
400-350-360	149	360		
400-350-380	122	415		
400-350-520	90	558		
450-450-350	161	350		
500-300-780	81	780		
500-300-920	85.4	920		
500-400-400	180.6	412	5600	3750
500-400-420	180	425		
500-400-540	105	545		
500-400-570	105	545		
500-400-660	84.9	666		
500-400-675	84.9	666		
600-400-740	99	740		
600-450-640	128	650		
600-500-520	175	520		
600-500-550	243	580	6300	4700
600-500-580				
700-500-670	130	672	7000	5800
700-600-940	128.5	940		
700-600-600	103.5	610		
700-600-680	240	702		
700-600-740	146	780		
800-700-750	315.9	750	7700	7000

Speeds

The "Performance Range Chart" shows the pump operating range, for higher speeds consult POMPE ZANNI.

Vibrations

- 1 – The normal operating range of pumps is 0.4 ~ 1.25 times of rated capacity.
- 2 – The vibration values of pump are according to ISO 2372-1974.

Paint specifications

	INSIDE	OUTSIDE
Pre-treatment	Blasting (2 times)	
Primer coating	Epoxy zinc-rich primer	
Finish coating	Wet parts use the Interzone 954 or Epoxy zinc-rich primer	Acrylic enamel Normal PZSC: RAL7012(Grey) Fire-Fighting Pump: RAL3000(Red)

Note: Super light energy saving coating, wear-resistant coating, anti-corrosion coating and other are available according to the different medium, application, customer requirements and the coating is extra charged.

Arrangement - 1

SEALING WATER PIPES

fig. A.

Flushing water piping stuffing box.

Note: If $H > 80$ m, flushing water piping will have control valve (See fig. D).


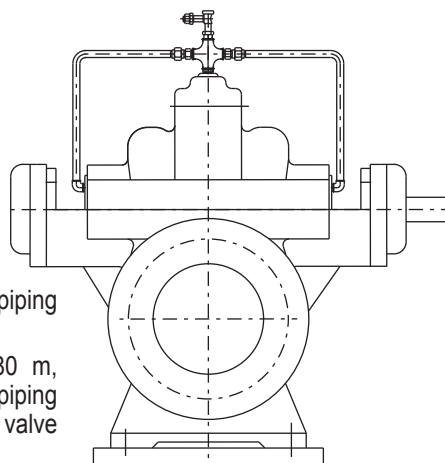


fig. B.

Flushing water piping mechanical seal.

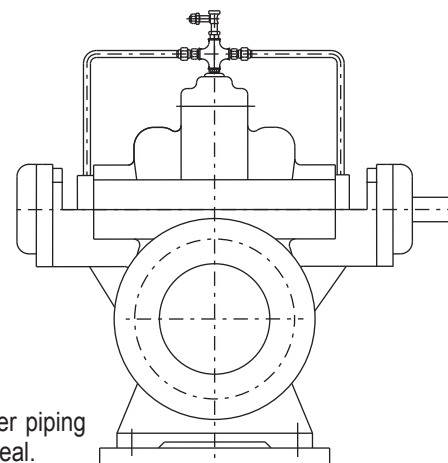


... Arrangement - 1

SEALING WATER PIPES

fig. C.

Mechanical seal and flushing water piping for lineshaft bearing.

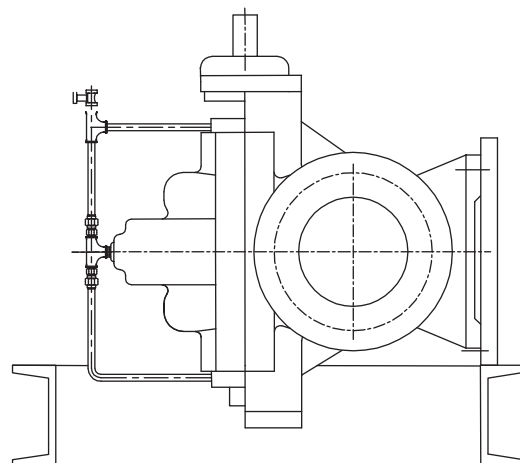

Arrangement - 2

VENTING CONNECTIONS AND BEARING TEMPERATURE SENSOR

(Vent valves are available as accessories)

fig. D.

Flushing water piping stuffing box with vent valve.

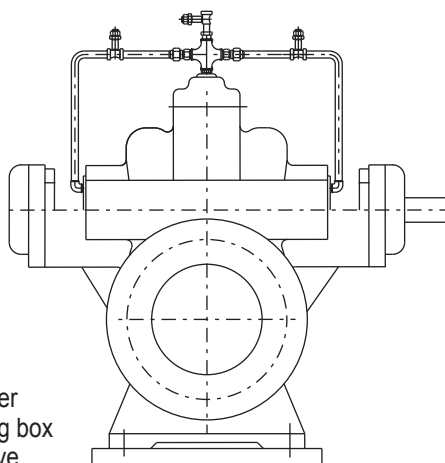


fig. E.

Flushing water piping mechanical seal with vent valve.

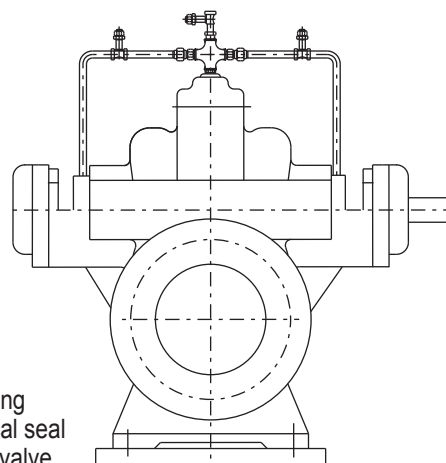


fig. F.

Flushing water piping and vent valve (vertical installation).


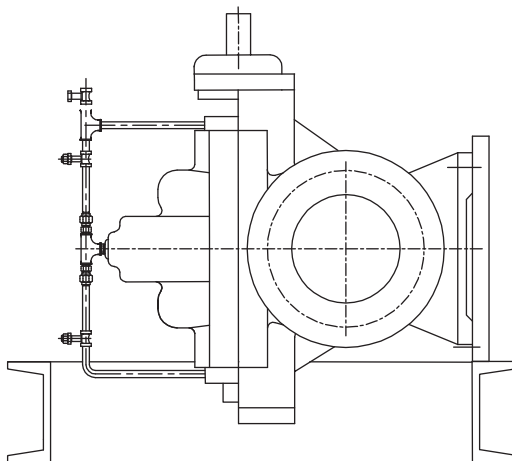



fig. G.

Bearing temperature sensor (PT100).




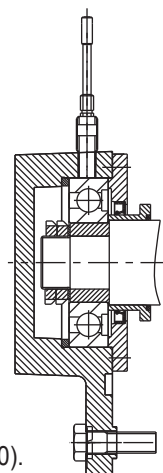

Bare shaft pump dimensions

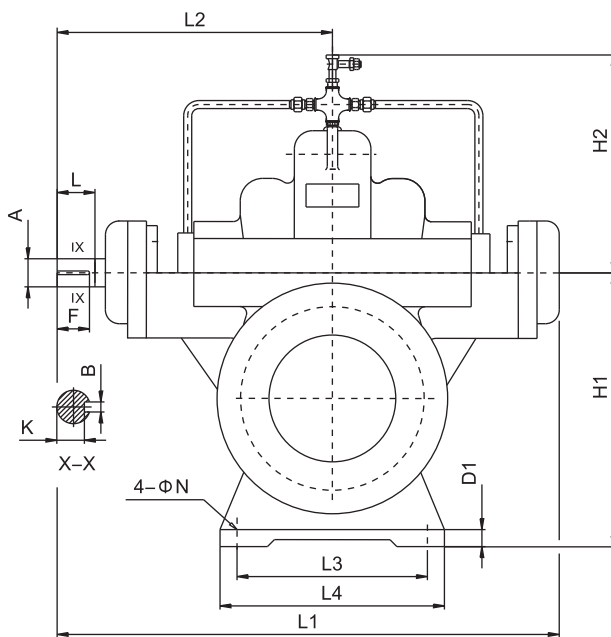



Direction of rotation: **CLOCKWISE**

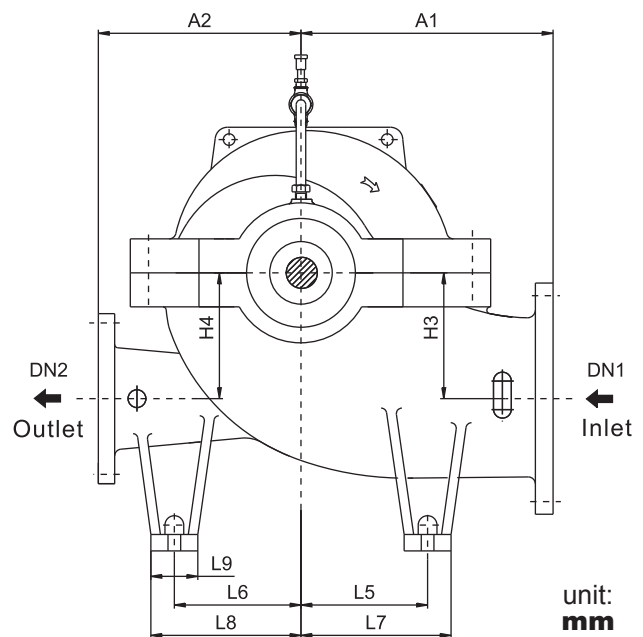

MODEL PZSC	A1	A2	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6	L7	L8	L9	D1	N	A	L	B	K	F
125-80-210	300	300	315	270	150	150	788.9	440.5	270	320	170	170	205	205	70	30	18	35	81.5	10	30	75
125-80-270	300	300	315	269	150	150	788.9	440.5	270	320	170	170	205	205	70	30	18	35	81.5	10	30	75
125-80-350	330	330	315	333	140	140	788.9	440.5	270	320	170	170	210	210	80	30	18	35	81.5	10	30	75
150-100-250	330	330	355	328	170	170	788.9	440.5	270	320	200	200	240	240	80	30	18	35	81.5	10	30	75
150-100-320	330	330	355	342	170	170	788.9	440.5	270	320	200	200	240	240	80	30	18	35	81.5	10	30	75
150-100-400	370	370	355	260	170	170	788.9	440.5	270	320	200	200	245	245	90	30	18	35	81.5	10	30	75
200-125-240	370	370	400	300	200	200	871	500	380	430	200	200	240	240	80	22	25	45	111.5	14	39.5	105
200-125-300	370	370	400	325	200	200	871	500	380	430	225	225	265	265	80	22	25	45	111.5	14	39.5	105
200-125-380	395	370	400	350	200	200	871	500	340	390	225	225	265	265	80	30	25	45	111.5	14	39.5	105
200-125-480	450	450	400	389	200	200	871	500	340	390	280	280	320	320	80	30	25	45	111.5	14	39.5	105
200-150-290	400	400	400	340	200	200	871	500	380	430	225	225	265	265	80	30	25	45	111.5	14	39.5	105
200-150-360	400	400	400	380	200	200	871	500	380	430	225	225	265	265	80	30	25	45	111.5	14	39.5	105
200-150-460	450	450	400	390	200	200	1006.1	569.3	430	480	280	280	320	320	80	30	25	55	112.7	16	49	100
200-150-570	600	500	500	460	300	300	1006.1	569.3	430	480	350	350	400	400	100	30	25	55	112.7	16	49	100
250-200-340	450	450	500	368	240	240	1006.1	569.3	430	480	280	280	320	320	80	25	25	55	112.7	16	49	100
250-200-430	500	500	500	400	240	240	1006.1	569.3	430	480	280	280	325	325	90	30	25	55	112.7	16	49	100
250-200-530	600	600	560	470	300	300	1110.8	637.3	430	480	350	350	400	400	100	30	25	65	143.2	18	58	135
250-200-660	650	550	600	525	350	350	1110.8	637.3	440	520	350	350	400	400	100	30	25	65	143.2	18	58	135
300-250-270	500	450	600	404	300	300	1006.1	569.3	430	480	300	270	340	310	80	30	25	55	112.7	16	49	100
300-250-280	500	450	600	404	300	300	1006.1	569.3	430	480	300	270	340	310	80	30	25	55	112.7	16	49	100
300-250-390	500	500	600	417	300	300	1110.8	637.3	430	480	350	350	400	400	100	42	25	65	143.2	18	58	135
300-250-490	550	550	600	583	300	300	1316.5	737.5	520	600	350	350	400	400	100	35	25	75	143.5	20	67.5	135
300-250-610	650	550	630	640	350	350	1316.5	737.5	520	600	350	350	400	400	100	42	25	75	143.5	20	67.5	135
300-250-780	700	600	750	600	400	400	1533	870	600	700	350	350	425	425	150	42	25	85	172.5	22	76	165
350-300-310	600	520	630	465	300	300	1110.8	637.3	480	560	350	300	415	365	130	35	25	65	143.2	18	58	135
350-300-330	600	520	630	465	300	300	1110.8	637.3	480	560	350	300	415	365	130	35	25	65	143.2	18	58	135



Direction of rotation: **CLOCKWISE**

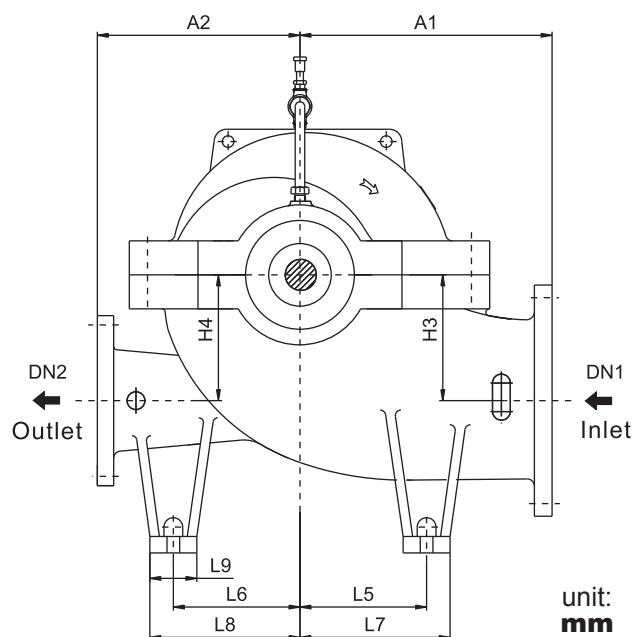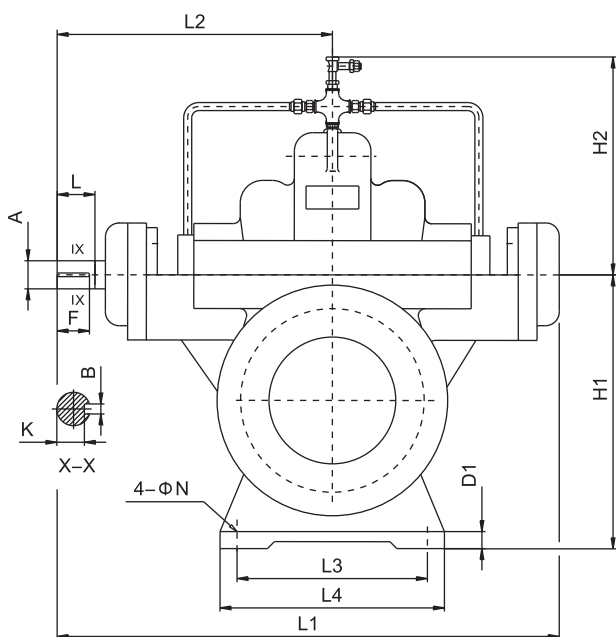


MODEL PZSC	A1	A2	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6	L7	L8	L9	D1	N	A	L	B	K	F
400-300-450	650	550	700	590	350	350	1316.5	737.5	520	600	350	350	400	400	100	40	25	75	143.5	20	67.5	135
400-300-570	700	650	710	530	350	350	1527	870	520	600	475	475	525	525	100	40	25	85	172.5	22	76	165
400-300-700	700	650	750	530	400	400	1527	870	600	700	425	425	485	485	120	40	25	85	172.5	22	76	165
400-350-360	670	570	670	513	350	350	1316.5	737.5	630	710	330	330	380	380	100	35	25	75	143.5	20	67.5	135
400-350-380	670	570	670	513	350	350	1316.5	737.5	630	710	330	330	380	380	100	35	25	75	143.5	20	67.5	135
400-350-520	700	650	750	535	400	400	1527	870	520	600	475	475	525	525	100	35	25	85	172.5	22	76	165
450-450-350	700	550	700	520	370	370	1308.5	737.5	700	800	330	330	380	380	100	35	25	75	143.5	20	67.5	135
500-300-920	900	900	850	615	400	400	1909	1088	780	940	500	500	620	620	240	40	42	115	210	32	104	180
500-300-780	800	750	800	535	400	400	1900	1055	580	740	450	450	570	570	240	45	35	115	210	30	104	180
500-400-400	765	600	785	537	420	400	1438.5	821.5	560	640	400	400	460	460	120	35	30	75	143.5	20	67.5	135
500-400-420	765	600	785	537	420	400	1438.5	821.5	560	640	400	400	460	460	120	35	30	75	143.5	20	67.5	135
500-400-540	700	700	820	600	420	420	1773	1009	780	940	400	400	520	520	240	40	35	100	210	28	90	180
500-400-570	700	700	820	600	420	420	1468	821	780	940	400	400	520	520	240	40	35	75	143.5	20	67.5	135
500-400-660	850	750	850	641	450	450	1773	1009	780	940	500	400	620	520	240	40	35	100	210	28	90	180
500-400-675	850	750	850	641	450	450	1527	870	780	940	500	400	620	520	240	40	35	85	172.5	22	76	165
600-400-740	990	800	1000	697	530	530	1773	1009	780	940	560	460	680	580	240	40	35	100	210	28	90	180
600-400-850	1030	880	1000	600	500	500	2009	1138	880	1060	470	470	730	730	260	50	42	115	210	32	104	180
600-500-520	1020	740	970	737	550	525	1790	984	780	940	360	360	480	480	240	40	35	80	142	22	71	130
600-500-550	1020	740	970	737	550	525	1790	984	780	940	360	360	480	480	240	40	35	80	142	22	71	130
600-500-580	1020	740	970	737	550	525	1790	984	780	940	360	360	480	480	240	40	35	80	142	22	71	130
700-500-670	1050	950	1035	725	550	550	1773	1009	780	940	625	525	750	650	250	50	42	100	210	28	90	180
700-500-940	1050	950	1150	695	650	650	2308	1225	980	1100	700	600	810	710	220	50	42	130	250	32	119	245
700-600-600	1050	850	1100	800	610	610	1935	1090	780	940	725	575	850	700	250	50	42	100	210	28	90	180
700-600-680	1150	850	1100	800	610	610	1935	1090	780	940	725	575	850	700	250	50	42	100	210	28	90	180
700-600-740	1160	1100	1120	725	570	570	1909	1088	880	1060	630	630	760	760	260	50	42	115	210	32	104	180
800-700-750	1315	1250	1250	870	710	680	2310	1278	1000	1250	725	725	875	875	300	60	42	120	210	32	109	200

Note: if require for the dimension of pump wich is not shown in these tables, contact POMPE ZANNI.

Flange dimensions

MODEL PZSC	ISO 7025/2 DIN2501	SUCTION FLANGE						DISCHARGE FLANGE					
		DN	D	T	K	d2	n	DN	D	T	K	d2	n (number of holes)
125-80-210	PN16	125	250	26	210	19	8	80	200	22	160	19	8
125-80-270													
125-80-350													
150-100-250	PN16	150	285	26	240	23	8	100	220	24	180	19	8
150-100-320													
150-100-400													
200-125-240	PN16	200	340	30	295	23	12	125	250	26	210	19	8
200-125-300													
200-125-380													
200-125-480	PN16	200	340	30	295	23	12	150	285	26	240	23	8
200-150-290													
200-150-360													
200-150-460	PN16	250	405	32	355	28	12	200	340	30	295	23	12
200-150-570													
250-200-340													
250-200-430	PN25	250	425	36	370	31	12	200	360	34	310	28	12
250-200-530													
250-200-660													
300-250-270	PN16	300	460	32	410	28	12	250	405	32	355	28	12
300-250-280													
300-250-390													
300-250-490	PN40	300	515	50	450	34	16	250	450	46	385	34	12
300-250-610													
300-250-780													
350-300-310	PN16	350	520	36	470	28	16	300	460	32	410	28	12
350-300-330													
400-300-450													
400-300-570	PN16	400	580	38	525	31	16	300	460	32	410	28	12
400-300-700													
400-350-360													
400-350-380	PN25	400	620	48	550	37	16	300	485	40	430	31	16
400-350-520													
500-400-400													
500-400-420	PN16	400	580	38	525	31	16	350	520	36	470	28	16
450-450-350													
500-300-780													
500-300-920	PN10	500	670	34	620	28	20	400	565	32	515	28	16
500-400-570													
500-400-675													
500-400-540	PN10	450	615	35	565	28	20	450	615	35	565	28	20
500-400-660													
600-500-520													
600-500-550	PN40	500	715	42	650	34	20	300	515	50	450	33	16
600-500-580													
600-400-740													
700-500-670	PN25	500	730	52	660	37	20	300	485	38	430	30	16
700-500-940													
700-600-600													
700-600-680	PN10	500	670	34	620	28	20	400	565	32	515	28	16
700-600-740													
800-700-750													
700-600-600	PN16	500	715	42	650	34	20	400	580	38	525	31	16
700-600-680													
700-600-740													
700-600-740	PN25	500	730	52	660	37	20	400	620	48	550	37	16
700-600-740													
800-700-750													
700-600-600	PN10	600	780	36	725	31	20	500	670	34	620	28	20
700-600-680													
700-600-740													
700-600-740	PN16	700	895	40	840	31	24	600	780	36	725	31	20
700-600-740													
700-600-740													
700-600-740	PN10	700	895	40	840	31	24	600	840	48	770	37	20
700-600-740													
700-600-740													
700-600-740	PN16	800	1015	44	950	34	24	700	895	40	840	31	24
700-600-740													
700-600-740													

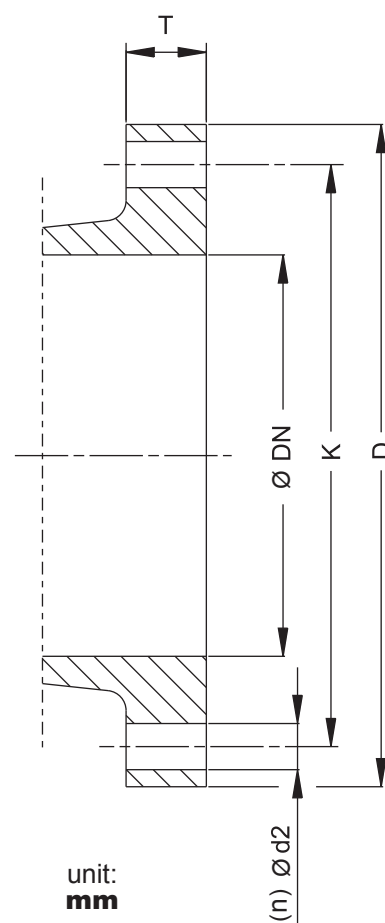

unit:
mm


NOTE:
If require flange wich is in accordance with BS4504, ANSI B16.1 or other standard, pls specify.
If require for the dimension of pump wich is not shown in the above table, contact POMPE ZANNI.



Horizontal pump with motor

(STANDARD)

Direction of rotation: **CLOCKWISE**

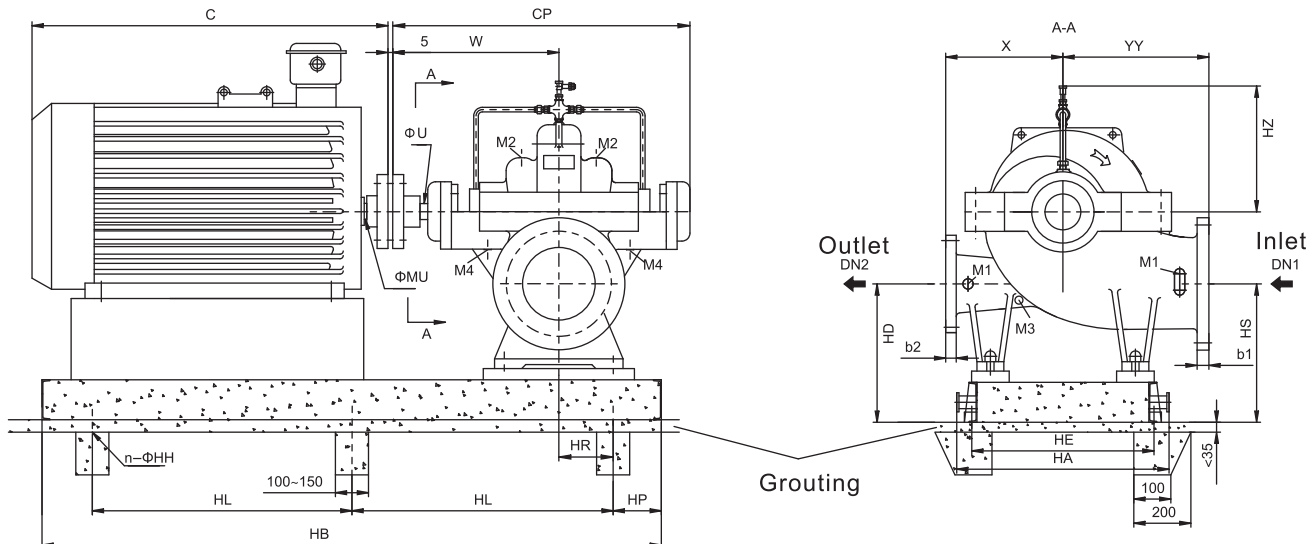

After alignment fill baseplate with non-shrinking concrete
position of the terminal box is in accordance with the motor
standard.

Connect pipes without stress.

Connections:

M1 - Pressure gauge G1/2

M2 - Vent G1/2

M3 - Drainage G1/2

M4 - Leakage liquid drain G3/4

unit:
mm

MODEL PZSC	Speed (r/min)	Power (kW)	Motor Size	Pump						Motor		Baseplate										Weight (kg)							
				CP	U	W	YY	X	HZ	C	MU	HB	HP	HL	HD/HS	HA	HE	n	HH	HR	Pump	Motor	Baseplate	Total					
125-80-210	1480	1.5	90L	788.9	35	440.5	300	300	270	340	24	930	120	340	305	570	470	6	20	80	180	27	105	312					
		3	100L							380	28	960	120	360	305	570	470	6	20	80	180	33	105	318					
		4	112M							400	28	970	120	360	305	570	470	6	20	80	180	45	110	335					
		5.5	132S							475	38	1020	120	390	305	570	470	6	20	80	180	61	110	351					
		15	160M							605	42	1140	120	450	305	570	470	6	20	80	180	106	120	406					
	2980	18.5	160L							605	42	1180	120	470	305	570	470	6	20	80	180	125	125	430					
		22	180M							670	48	1190	120	470	305	570	470	6	20	80	180	152	120	452					
		37	200L							775	55	1270	120	510	305	570	470	6	20	80	180	245	125	550					
		45	225M							815	55	1290	120	520	305	570	470	6	20	80	180	307	125	612					
125-80-270	1480	3	100L	788.9	35	440.5	300	300	269	380	28	960	120	360	305	570	470	6	20	80	185	33	100	317					
		4	112M							400	28	970	120	360	305	570	470	6	20	80	185	45	102	331					
		5.5	132S							475	38	1020	120	390	305	570	470	6	20	80	185	61	104	349					
		7.5	132M							515	38	1060	120	410	305	570	470	6	20	80	185	73	108	365					
		11	160M							605	42	1140	120	450	305	570	470	6	20	80	185	103	111	398					
		15	160L							650	42	1180	120	470	305	570	470	6	20	80	185	130	116	430					
		22	180M							670	48	1190	120	470	305	570	470	6	20	80	185	152	113	449					
	2980	37	200L							775	55	1270	120	510	305	570	470	6	20	80	185	245	117	546					
		45	225M							815	55	1290	120	520	305	570	470	6	20	80	185	307	115	606					
		55	250M							930	60	1390	120	570	305	600	500	6	20	80	185	378	120	682					
		75	280S							1000	65	1460	120	610	305	670	540	6	20	80	185	550	129	863					
		90	280M							1050	65	1510	120	630	305	670	540	6	20	80	185	570	133	887					

MODEL PZSC	Speed (r/min)	Power (kW)	Motor Size	Pump						Motor		Baseplate										Weight (kg)			
				CP	U	W	YY	X	HZ	C	MU	HB	HP	HL	HD/HS	HA	HE	n	HH	HR	Pump	Motor	Baseplate	Total	
125-80-350	1480	5.5	132S	788.9	35	440.5	330	330	333	475	38	1020	120	390	315	570	470	6	20	80	205	61	106	373	
		7.5	132M							515	38	1060	120	410	315	570	470	6	20	80	205	73	109	388	
		11	160M							605	42	1140	120	450	315	570	470	6	20	80	205	103	112	421	
		15	160L							650	42	1180	120	470	315	570	470	6	20	80	205	130	117	453	
		18.5	180M							670	48	1190	120	470	315	570	470	6	20	80	205	165	114	485	
		22	180L							710	48	1240	120	500	315	570	470	6	20	80	205	180	117	503	
150-100-250	1480	3	100L	788.9	35	440.5	330	330	328	380	28	960	120	360	325	600	500	6	20	80	220	33	106	357	
		4	112M							400	28	970	120	360	325	600	500	6	20	80	220	45	108	371	
		5.5	132S							475	38	1020	120	390	325	600	500	6	20	80	220	61	111	390	
		7.5	132M							515	38	1060	120	410	325	600	500	6	20	80	220	73	115	401	
		11	160M							605	42	1140	120	450	325	600	500	6	20	80	220	103	120	441	
		15	160L							650	42	1180	120	470	325	600	500	6	20	80	220	130	125	473	
	2980	22	180M	670	48	1190	120	470	325	600	500	6	20	80	220	152	122	492							
		37	200L	775	55	1270	120	510	325	600	500	6	20	80	220	245	127	590							
		45	225M	815	55	1290	120	520	325	600	500	6	20	80	220	307	126	651							
		55	250M	930	60	1390	120	570	325	600	500	6	20	80	220	378	132	728							
		75	280S	1000	65	1460	120	610	325	670	540	6	20	80	220	550	131	899							
		90	280M	1050	65	1510	120	630	325	670	540	6	20	80	220	570	136	924							
		110	315S	1240	65	1550	120	650	325	790	690	6	20	80	220	740	156	1114							
		7.5	132M	515	38	1060	120	410	325	600	500	6	20	80	235	73	115	418							
		11	160M	605	42	1140	120	450	325	600	500	6	20	80	235	103	120	453							
		15	160L	650	42	1180	120	470	325	600	500	6	20	80	235	130	125	485							
150-100-320	1480	18.5	180M	788.9	35	440.5	330	330	342	670	48	1190	120	470	325	600	500	6	20	80	235	165	122	517	
		22	180L							710	48	1270	120	510	325	600	500	6	20	80	235	180	126	536	
		30	200L							775	55	1290	120	520	325	600	500	6	20	80	235	238	127	595	
		55	250M							930	60	1390	120	570	325	600	500	6	20	80	235	378	132	740	
		75	280S							1000	65	1460	120	610	325	670	540	6	20	80	235	550	131	911	
		90	280M							1050	65	1510	120	630	325	670	540	6	20	80	235	570	136	936	
	2980	110	315S	1240	65	1550	120	650	325	790	690	6	20	80	235	740	155	1125							
		132	315M	1310	65	1630	120	690	325	790	690	6	20	80	235	855	166	1251							
		200	315L	1310	65	1650	120	700	325	790	690	6	20	80	235	970	166	1366							
		11	160M	605	42	1140	120	450	325	600	500	6	20	80	245	103	121	462							
		15	160L	650	42	1180	120	470	325	600	500	6	20	80	245	130	126	494							
		18.5	180M	670	48	1190	120	470	325	600	500	6	20	80	245	165	123	526							
		195	180L	710	48	1240	120	500	325	600	500	6	20	80	245	180	127	545							
		30	200L	775	55	1270	120	510	325	600	500	6	20	80	245	238	128	604							
		37	225S	820	60	1300	120	530	325	600	500	6	20	80	245	298	125	661							
		45	225M	847	60	1320	120	520	325	600	500	6	20	80	245	322	127	687							
150-100-400	1480	55	250M	788.9	35	440.5	370	370	260	930	65	1390	120	570	325	600	500	6	20	80	245	410	133	781	
		7.5	132S							475	38	1140	150	420	360	600	500	6	20	110	295	61	128	483	
		7.5	132M							515	38	1180	150	440	360	600	500	6	20	110	295	73	132	499	
		11	160M							605	42	1260	150	480	360	600	500	6	20	110	295	103	138	535	
		15	160L							650	42	1300	150	500	360	600	500	6	20	110	295	130	144	568	
		18.5	180M							670	48	1310	150	500	360	600	500	6	20	110	295	165	141	600	
	2980	22	180L	710	48	1360	150	530	360	600	500	6	20	110	295	180	146	620							
		45	225M	815	55	1410	150	550	360	600	500	6	20	110	295	307	149	750							
		55	250M	930	60	1510	150	600	360	600	500	6	20	110	295	378	156	828							
		75	280S	1000	65	1580	150	640	360	670	540	6	20	110	295	550	163	1007							
		90	280M	1050	65	1630	150	660	360	670	540	6	20	110	295	570	169	1033							
		110	315S	1240	65	1660	150	680	360	790	690	6	20	110	295	740	185	1219							
		132	315M	1310	65	1750	150	720	360	790	690	6	20	110	295	855	197	1346							
		7.5	132M	515	38	1180	150	440	360	680	580	6	20	110	310	73	135	520							
		11	160M	605	42	1260	150	480	360	680	580	6	20	110	310	103	142	557							
		15	160L	650	42	1300	150	500	360	680	580	6	20	110	310	130	147	589							
200-125-240	1480	18.5	180M	871	45	500	370	370	325	670	48	1310	150	500	360	680	580	6	20	110	310	180	150	642	
		22	180L							775	55	1390	150	540	360	680	580	6	20	110	310	238	150	700	
		30	200L							820	60	1420	150	560	360	680	580	6	20	110	310	298	147	757	
		37	225S							930	60	1510	150	600	360	680	580	6	20	110	310	378	163	853	
		55	250M							1000	65	1580	150	640	360	680	580	6	20	110	310	550	163	1025	
		75	280S							1050	65	1630	150	660	360	680	580	6	20	110	310	570	169	1051	
	2980	90	280M	1240	65	1660	150	680	360	790	690	6	20	110	310	740	185	1237							
		110	315S	1310	65	1750	150	720	360	790	690	6	20	110	310	855	197	1364							
		132	315M	1310	65	1770	150	730	360	790	690	6	20	110	310	1080	197	1589							



MODEL PZSC	Speed (r/min)	Power (kW)	Motor Size	Pump						Motor		Baseplate										Weight (kg)			
				CP	U	W	YY	X	HZ	C	MU	HB	HP	HL	HD/HS	HA	HE	n	HH	HR	Pump	Motor	Baseplate	Total	
200-125-380	1480	15	160L	871	45	500	395	370	350	650	42	1290	150	490	360	670	540	6	20	95	350	130	152	632	
		18.5	180M							670	48	1290	150	490	360	670	540	6	20	95	350	165	149	664	
		22	180L							710	48	1340	150	520	360	670	540	6	20	95	350	180	154	684	
		30	200L							775	55	1370	150	530	360	670	540	6	20	95	350	238	155	743	
		37	225S							820	60	1400	150	550	360	670	540	6	20	95	350	298	152	800	
		45	225M							845	60	1430	150	560	360	670	540	6	20	95	350	322	154	826	
		55	250M							930	65	1500	150	600	360	670	540	6	20	95	350	410	162	922	
		75	280S							1000	75	1560	150	630	360	670	540	6	20	95	350	555	169	1074	
200-125-480	1480	30	200L	871	45	500	450	450	389	775	55	1370	150	530	360	790	690	6	20	95	390	238	161	789	
		37	225S							820	60	1400	150	550	360	790	690	6	20	95	390	298	158	846	
		45	225M							845	60	1430	150	560	360	790	690	6	20	95	390	322	160	872	
		55	250M							930	65	1500	150	600	360	790	690	6	20	95	390	410	168	968	
		75	280S							1000	75	1560	150	630	360	790	690	6	20	95	390	555	176	1121	
		90	280M							1050	75	1620	150	660	360	790	690	6	20	95	390	610	182	1182	
		110	315S							1270	80	1680	150	690	360	790	690	6	20	95	390	750	192	1332	
		132	315M							1340	80	1730	150	710	360	790	690	6	20	95	390	875	204	1469	
200-150-290	1480	11	160M	871	45	500	400	400	340	605	42	1260	150	480	360	680	580	6	20	110	330	103	150	583	
		15	160L							650	42	1300	150	500	360	680	580	6	20	110	330	130	150	610	
		18.5	180M							670	48	1310	150	500	360	680	580	6	20	110	330	165	160	655	
		22	180L							710	48	1360	150	530	360	680	580	6	20	110	330	180	160	670	
		30	200L							775	55	1390	150	540	360	680	580	6	20	110	330	238	170	738	
		37	225S							820	60	1420	150	560	360	680	580	6	20	110	330	298	170	798	
		45	225M							930	60	1440	150	570	360	680	580	6	20	110	330	322	170	822	
200-150-360	1480	18.5	180M	871	45	500	400	400	380	670	48	1310	150	500	360	670	540	6	20	110	365	165	160	675	
		22	180L							710	48	1360	150	530	360	670	540	6	20	110	365	180	160	690	
		30	200L							775	55	1390	150	540	360	670	540	6	20	110	365	238	170	758	
		37	225S							820	60	1420	150	560	360	670	540	6	20	110	365	298	170	818	
		45	225M							930	60	1440	150	570	360	670	540	6	20	110	365	322	170	842	
		55	250M							930	65	1510	150	600	360	670	540	6	20	110	365	410	175	935	
		75	280S							1000	75	1580	150	640	360	670	540	6	20	110	365	555	185	1090	
200-150-460	1480	30	200L	1006.1	55	569.3	450	450	390	775	55	1490	150	590	360	770	650	6	25	140	460	238	220	918	
		37	225S							820	60	1520	150	610	360	770	650	6	25	140	460	298	230	988	
		45	225M							930	60	1540	150	620	360	770	650	6	25	140	460	322	230	1012	
		55	250M							930	65	1610	150	650	360	770	650	6	25	140	460	410	235	1105	
		75	280S							1000	75	1680	150	690	360	770	650	6	25	140	460	555	250	1265	
		90	280M							1050	75	1730	150	710	360	770	650	6	25	140	460	610	255	1325	
		110	315S							1270	80	1790	150	740	360	770	650	6	25	140	460	750	280	1490	
		132	315M							1340	80	1850	150	770	360	770	650	6	25	140	460	875	280	1615	
		200	315L							1340	80	1900	150	800	360	820	700	6	25	140	460	960	280	1700	
200-150-570	1480	55	250M	1006.1	55	569.3	600	500	460	930	65	1610	150	650	360	960	840	6	25	140	670	410	260	1338	
		75	280S							1000	75	1680	150	690	360	960	840	6	25	140	670	555	285	1508	
		90	280M							1050	75	1730	150	710	360	960	840	6	25	140	670	610	285	1563	
		110	315S							1270	80	1790	150	740	360	960	840	6	25	140	670	750	300	1718	
		132	315M							1340	80	1850	150	770	360	960	840	6	25	140	670	875	320	1863	
		200	315L							1340	80	1900	150	800	360	960	840	6	25	140	670	960	340	1968	
		280	335(6KV)							1690	100	2590	150	760	380	960	840	8	25	140	670	1730	480	2878	
250-200-340	1480	30	200L	1006.1	55	569.3	450	450	368	775	55	1490	150	590	420	680	650	6	25	140	478	238	260	976	
		37	225S							820	60	1520	150	610	420	680	650	6	25	140	478	298	260	1036	
		45	225M							845	60	1540	150	620	420	680	650	6	25	140	478	322	260	1060	
		55	250M							930	65	1610	150	650	420	680	650	6	25	140	478	410	280	1168	
		75	280S							1000	75	1680	150	690	420	680	650	6	25	140	478	555	280	1313	
		90	280M							1050	75	1730	150	710	420	680	650	6	25	140	478	610	280	1368	
250-200-430	1480	37	225S	1006.1	55	569.3	500	500	400	820	60	1530	150	610	420	820	700	6	25	150	568	298	260	1118	
		45	225M							845	60	1550	150	620	420	820	700	6	25	150	568	322	260	1142	
		55	250M							930	65	1620	150	660	420	820	700	6	25	150	568	410	280	1250	
		75	280S							1000	75	1690	150	690	420	820	700	6	25	150	568	555	280	1395	
		90	280M							1050	75	1740	150	720	420	820	700	6	25	150	568	610	280	1450	
		110	315S							1340	80	1800	150	750	420	820	700	6	25	150	568	750	310	1620	
		132	315M							1340	80	1850	150	770	420	820	700	6	25	150	568	875	310	1745	
		200	315L							1340	80	1900	150	800	420	820	700	6	25	150	568	960	310	1830	



MODEL PZSC	Speed (r/min)	Power (kW)	Motor Size	Pump						Motor		Baseplate										Weight (kg)			
				CP	U	W	YY	X	HZ	C	MU	HB	HP	HL	HD/HS	HA	HE	n	HH	HR	Pump	Motor	Baseplate	Total	
250-200-530	1480	75	280S	1110.8	65	637.3	600	500	470	1000	75	1760	150	730	440	960	840	6	25	150	710	555	280	1545	
		90	280M							1050	75	1810	150	750	440	960	840	6	25	150	710	610	280	1600	
		110	315S							1340	80	1870	150	780	440	960	840	6	25	150	710	750	350	1810	
		132	315M							1340	80	1920	150	810	440	960	840	6	25	150	710	875	350	1935	
		200	315L							1340	80	1970	150	830	440	960	840	6	25	150	710	960	350	2020	
		315	335(6KV)							1690	100	2670	150	790	460	960	840	8	25	150	710	1730	540	2980	
		355	400(6KV)							1860	110	2780	150	820	460	1070	950	8	25	150	710	2050	610	3370	
250-200-660	1480	110	315S	1110.8	65	637.3	650	550	525	1340	80	1880	150	790	450	960	840	6	25	160	1020	750	360	2104	
		132	315M							1340	80	1930	150	810	450	960	840	6	25	160	1020	875	360	2229	
		200	315L							1340	80	1980	150	840	450	960	840	6	25	160	1020	960	360	2314	
		315	355(6KV)							1690	100	2680	150	790	450	960	840	8	25	160	1020	1730	560	3284	
		355	400(6KV)							1860	110	2790	150	830	450	1070	950	8	25	160	1020	2050	610	3654	
300-250-270	1480	30	200L	1006.1	55	569.3	500	500	300	775	55	1490	150	590	460	820	700	6	25	140	650	238	270	1158	
		45	225M							845	60	1510	150	620	460	820	700	6	25	140	650	322	280	1252	
		55	250M							930	65	1610	150	650	460	820	700	6	25	140	650	410	280	1340	
300-250-280	1480	30	200L	1006.1	55	569.3	500	450	404	775	55	1490	150	590	460	820	700	6	25	140	650	238	270	1158	
		37	225S							820	60	1520	150	610	460	820	700	6	25	140	650	298	280	1228	
		45	225M							845	60	1540	150	620	460	820	700	6	25	140	65	322	280	1252	
		55	250M							930	65	1610	150	650	460	820	700	6	25	140	650	410	280	1340	
		75	280S							1000	75	1680	150	690	460	820	700	6	25	140	650	555	280	1485	
300-250-390	1480	75	280S	1110.8	65	637.3	500	500	417	1000	75	1760	150	730	480	960	840	6	25	150	668	555	340	1563	
		90	280M							1050	75	1810	150	750	480	960	840	6	25	150	668	610	340	1618	
		110	315S							1340	80	1870	150	780	480	960	840	6	25	150	668	750	360	1778	
		132	315M							1340	80	1920	150	810	480	960	840	6	25	150	668	875	360	1903	
		200	315L							1340	80	1970	150	830	480	960	840	6	25	150	668	960	360	1988	
300-250-490	1480	90	280M	1316.5	75	736.5	550	550	583	1050	75	1950	150	820	500	960	840	6	25	200	950	610	420	1980	
		110	315S							1340	80	2020	150	860	500	960	840	6	25	200	950	750	420	2120	
		132	315M							1340	80	2070	150	590	500	960	840	8	25	200	950	875	450	2275	
		200	315L							1340	80	2120	150	600	500	960	840	8	25	200	950	960	450	2360	
		315	355(6KV)							1690	100	28010	150	830	520	960	840	8	25	200	950	1730	620	3300	
		355	400(6KV)							1860	110	2920	150	870	520	1070	950	8	25	200	950	2050	720	3720	
300-250-610	1480	132	315M	1316.5	75	736.5	650	550	640	1340	80	2070	150	590	500	1070	950	8	25	200	1125	875	440	2441	
		200	315L							1340	80	2120	150	600	500	1070	950	8	25	200	1125	960	440	2526	
		315	355(6KV)							1690	100	2850	150	850	520	1070	950	8	25	210	1125	1730	640	3496	
		560	400(6KV)							1860	110	2930	150	870	520	1070	950	8	25	210	1125	2430	740	426	
		630	450(6KV)							1900	120	3200	150	960	520	1170	1050	8	25	210	1125	3030	740	4896	
300-250-780	1480	560	400(6KV)	1527	85	870	700	600	680	1860	110	3110	200	900	590	1070	950	8	30	200	1350	2430	920	4700	
		710	450(6KV)							1900	120	3370	200	990	590	1170	1050	8	30	200	1350	2170	950	4470	
		800	450(6KV)							1900	120	3370	200	990	590	1170	1050	8	30	200	1350	2280	1050	4680	
		1000	500(6KV)							1900	120	3630	200	800	590	1320	1200	8	30	200	1350	3960	1150	6460	
350-300-330	1480	55	250M	1110.8	65	637.3	600	520	465	930	65	1710	150	700	510	920	800	6	25	175	800	410	350	1560	
		75	280S							1000	75	1780	150	740	510	920	800	6	25	175	800	555	350	1705	
		90	280M							1050	75	1830	150	760	510	920	800	6	25	175	800	610	350	1760	
		110	315S							1340	80	1900	150	800	510	920	800	6	25	175	800	750	370	1920	
		132	315M							1340	80	1950	150	820	510	920	800	6	25	175	800	875	370	2045	
350-350-310	1480	55	250M	1110.8	65	637.3	600	520	465	930	65	1950	150	820	510	960	840	6	25	175	800	410	350	1560	
		75	280S							1000	75	1950	150	820	510	960	840	6	25	175	800	555	350	1705	
		90	280M							1050	75	1950	150	820	510	960	840	6	25	175	800	610	350	1760	
		110	315S							1340	80	1950	150	820	510	960	840	6	25	175	800	750	370	1920	
		132	315M							1340	80	1950	150	820	510	960	840	6	25	175	800	875	370	2045	
400-300-450	1480	90	280M	1316.5	75	736.5	650	550	590	1050	75	1960	150	830	530	960	840	6	25	200	1000	610	450	2060	
		110	315S							1340	80	2020	150	860	530	960	840	6	25	200	1000	750	450	2200	
		132	315M							1340	80	2070	150	590	530	960	840	8	25	200	1000	875	510	2385	
		200	351L							1340	80	2120	150	600	530	960	840	8	25	200	1000	960	510	2470	
		315	355(6KV)							1690	100	2860	150	850	570	960	840	8	25	210	1000	1730	690	3420	
		500	400(6KV)							1860	110	2940	150	880	570	1070	950	8	25	210	1000	2340	780	4120	




MODEL PZSC	Speed (r/min)	Power (kW)	Motor Size	Pump						Motor		Baseplate										Weight (kg)			
				CP	U	W	YY	X	HZ	C	MU	HB	HP	HL	HD/HS	HA	HE	n	HH	HR	Pump	Motor	Baseplate	Total	
400-300-570	1480	200	315L	1527	85	870	700	650	530	1340	80	2270	150	650	600	1270	1090	8	30	210	1505	960	500	2940	
		315	355 (6kV)							1690	100	2990	150	890	600	1270	1090	8	30	210	1505	1730	790	4000	
		560	400 (6kV)							1860	110	3070	150	920	600	1270	1090	8	30	210	1505	2430	880	4790	
		630	450 (6kV)							1900	120	3330	150	1010	600	1270	1090	8	30	210	1505	3030	880	5390	
400-300-700	1480	315	355 (6kV)	1527	85	870	700	650	530	1690	100	3030	200	870	620	1170	1050	8	30	200	1650	1730	810	4190	
		560	400 (6kV)							1860	110	3110	200	900	620	1170	1050	8	30	200	1650	2430	920	5000	
		900	450 (6kV)							1900	120	3370	200	990	620	1170	1050	8	30	200	1650	3460	950	6060	
		1000	500 (6kV)							2220	130	3630	200	1070	620	1170	1050	8	30	200	1650	3960	1050	6660	
400-350-360	1480	160	315L	1316.5	75	736.5	670	570	513	1340	80	2170	200	590	520	920	790	8	25	200	880	960	690	2530	
		160	315L							1340	80	2170	200	590	520	920	790	8	25	200	880	960	690	2530	
		110	315S							1340	80	2070	200	830	520	920	790	6	25	200	880	750	430	2060	
400-350-380	1480	90	280M	1316.5	75	736.5	670	570	513	1050	75	2010	200	800	520	920	790	6	25	200	880	610	350	1840	
		110	315S							1340	80	2070	200	830	520	920	790	6	25	200	880	750	430	2060	
		132	315M							1340	80	2120	200	570	520	920	790	8	25	200	880	875	460	2215	
		200	315L							1340	80	2170	200	590	520	920	790	8	25	200	880	1080	690	2650	
		315	355 (6kV)							1690	100	2900	200	830	520	920	790	8	25	200	880	1730	660	3270	
400-350-520	980	315	Y4005-6	1527	85	870	700	650	535	1860	110	3070	150	920	570	1260	1100	8	30	210	1350	2130	900	4380	
		250	Y355L-6							1690	100	2420	150	700	570	1260	1100	8	30	210	1350	1800	900	4050	
		200	Y355M-6							1690	100	2390	150	690	570	1260	1100	8	30	210	1350	1700	900	3950	
		160	Y355M-6							1690	100	2390	150	690	570	1260	1100	8	30	210	1350	1600	900	3850	
400-350-520	1480	315	355 (6kV)	1527	85	870	700	650	535	1690	100	2990	150	890	590	1260	1100	8	30	210	1350	1730	800	3880	
		560	400 (6kV)							1860	110	3070	150	920	590	1260	1100	8	30	210	1350	2430	900	4680	
		800	450 (6kV)							1900	120	3330	150	750	590	1260	1100	10	30	210	1350	3230	900	5480	
500-400-400	980	110	Y315L-6	1438.5	75	821.5	765	600	537	1340	80	2230	200	610	590/570	1080	960	8	25	170	1200	1150	600	2950	
		90	Y315M-6							1340	80	2180	200	590	590/570	1080	960	8	25	170	1200	1080	600	2880	
		75	Y280S-6							1050	75	2010	200	800	590/570	1080	960	6	25	170	1200	990	600	2790	
500-400-420	980	160	Y355M-6	1438.5	75	821.5	765	600	537	1690	100	2350	200	650	610/590	1080	960	8	30	170	1200	1600	900	3700	
		132	Y315L-6							1340	80	2230	200	610	590/570	1080	960	8	25	170	1200	1300	900	3400	
		110	Y315L-6							1340	80	2230	200	610	590/570	1080	960	8	25	170	1200	1150	900	3250	
		90	Y315M-6							1340	80	2180	200	590	590/570	1080	960	8	25	170	1200	1080	900	3180	
500-400-540	1480	1000	Y5006-4	1773	100	1009	700	700	600	2220	130	3850	300	800	620/620	1260	1150	10	30	210	1870	3690	1200	7160	
		800	Y4506-4							1900	120	3600	300	1000	620/620	1180	1050	8	30	210	1870	3230	1200	6430	
		500	Y4005-4							1860	110	3400	300	950	620/620	1180	1050	8	30	210	1870	2340	1100	5440	
500-400-570	980	315	Y4006-4	1468	100	821	700	700	600	1860	110	3200	300	900	620/620	1180	1050	8	30	210	1683	2130	1100	5230	
		250	Y3555-6							1690	110	3000	300	850	620/620	1180	1050	8	30	210	1683	1880	1000	4880	
		185	Y355L-6							1570	95	2500	300	650	620/620	1180	1050	8	30	210	1683	1400	700	4100	
500-400-660	1480	1400	Y50010-4	1773	100	1009	850	750	641	2220	130	3880	200	870	680	1360	1240	10	30	310	2400	4580	1300	8280	
		1120	Y5007-4							2220	130	3880	200	870	680	1360	1240	10	30	310	2400	4110	1300	7810	
		800	Y4507-4							1900	120	3620	200	800	680	1360	1240	10	30	310	2400	3230	1200	6830	
500-400-675	980	450	Y4505-6	1527	100	870	850	750	641	1940	130	3450	200	760	650	1360	1240	10	30	310	2160	2830	1200	6430	
		355	Y4006-6							1860	110	3260	200	720	650	1360	1240	10	30	310	2160	2190	1200	5790	
		250	Y355L-6							1690	100	2610	200	550	650	1360	1240	10	30	310	2160	1800	1200	5400	

**Note: dimensions and weight deviations subject to selected motor manufacturer are to be considered.
If require for the dimension of pump wich is not shown in these tables, contact POMPE ZANNI.**

Vertical pump with motor

(STANDARD)

Direction of rotation: **CLOCKWISE**


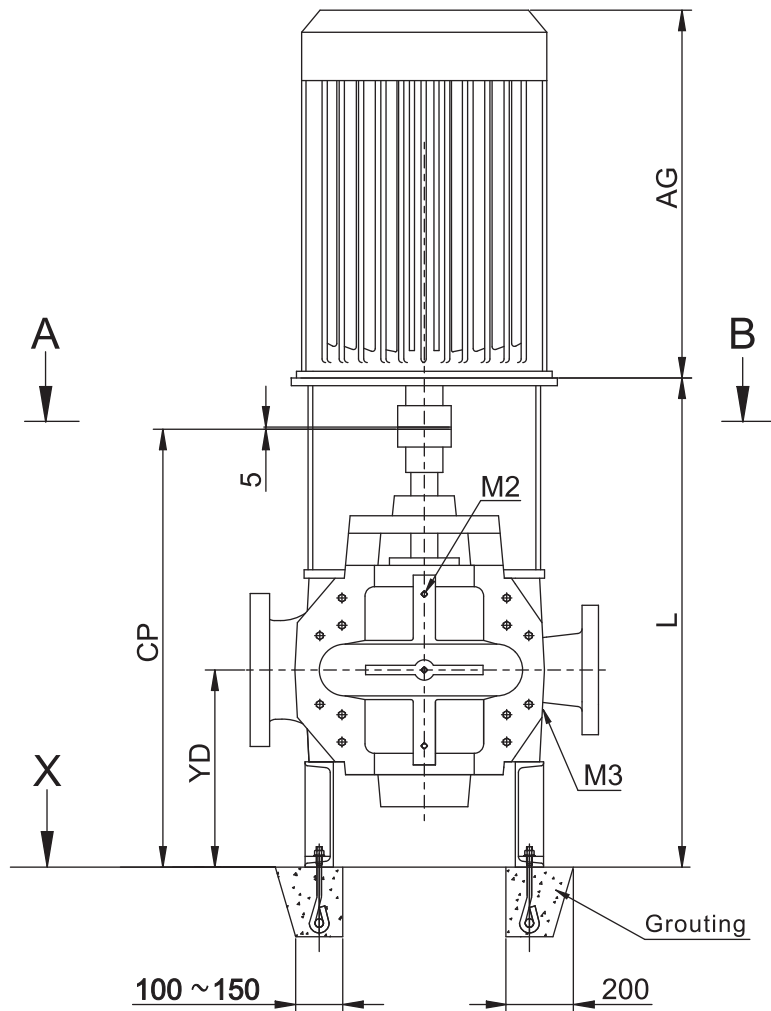


After alignment fill baseplate with non-shrinking concrete
Position of the terminal box is in accordance with the motor standard.
Connect pipes without stress

Connections

M1	Pressure gauge	G1/2
M2	Vent	G1/2
M3	Drainage	G1/2
M4	Leakage liquid drain	G3/4

unit:
mm

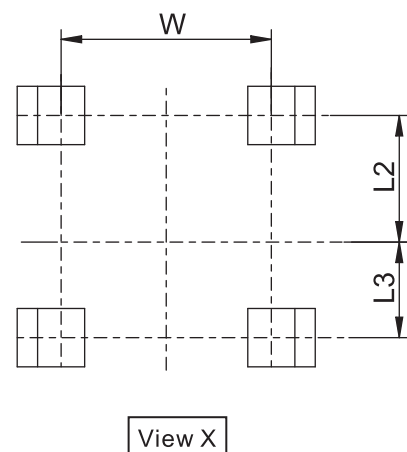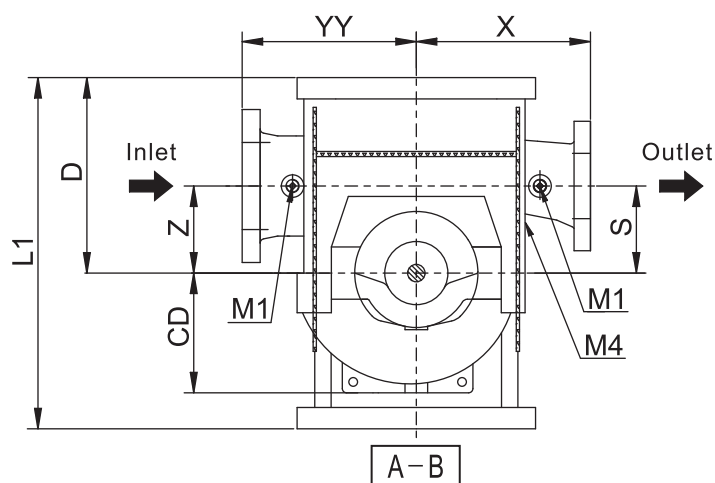




MODEL PZSC	Motor Size	Power (kW)	Dimensions													Installation
			CP	YY	X	S/Z	D	YD	CD	L	W	L1	L2	L3	AG	
125-80-210	min. 100L	3	840	300	300	150	315	400	270	870	580/ 520	710	370	120	320	TB
	max. 200L	37								930					665	
125-80-270	min. 132S	5.5	840	300	300	150	315	400	269	880	580/ 520	710	370	120	395	TB
	max. 280M	90								960					860	
125-80-350	min. 160M	11	840	330	330	140	315	400	333	880	580/ 520	710	370	120	495	TB/TK
	max. 315L	160								990					1170	
150-100-250	min. 132M	7.5	840	330	330	170	355	385	328	920	580/ 520	695	315	115	435	TB
	max. 280M	90								980					910	
150-100-320	min. 160L	15	840	330	330	170	355	385	342	950	580/ 520	695	315	115	540	TB/TK
	max. 315L	200								1010					1170	
150-100-400	min. 180L	22	840	370	370	170	355	385	260	950	580/ 520	695	315	115	600	TB
	max. 225M	55								980					705	
200-125-240	min. 160M	11	875	370	370	200	400	400	300	990	560	855	360	210	495	TB/TK
	max. 315L	160								1070					1170	
200-125-300	min. 180M	18.5	875	370	370	200	400	400	325	990	560	855	360	210	560	TB/TK
	max. 355M	250								1070					1400	
200-125-380	min. 200L	30	875	395	370	200	400	400	350	990	560	855	360	210	665	TB/TK
	max. 355L	280								1070					1170	
200-125-480	min. 225M	45	875	450	450	200	400	400	389	990	560	855	360	210	705	TB
	max. 315S	110								1050					1100	
200-150-290	min. 180M	18.5	875	400	400	200	435	375	340	990	600	900	435	315	560	TB/TK
	max. 355L	280								1020					1400	
200-150-360	min. 180M	18.5	875	400	400	200	435	375	380	990	600	900	435	315	560	TB
	max. 280S	75								1020					860	
200-150-460	min. 280S	75	982	450	450	200	400	465	390	1125	600	900	435	315	860	TB/TK
	max. 315L	160								1155					1170	
200-150-570	min. 315M	132	1002	600	500	300	500	465	460	1175	700	1060	460	315	1170	TK
	max. 355L	280								1175					1400	
250-200-340	min. 225M	45	982	450	450	240	500	465	368	1125	700	1060	460	315	705	TB
	max. 280M	90								1125					910	
250-200-430	min. 280S	75	982	500	500	240	500	465	400	1125	700	1060	460	315	770	TB/TK
	max. 315L	160								1155					1320	
250-200-530	min. 280S	132	1134	600	500	300	560	505	470	1050	700	1120	520	315	860	TK
	max. 355L	315								1340					1400	
250-200-660	min. 355L	315	1134	560	550	350	600	505	525	1340	700	1180	560	315	1400	TK/TJ
	max. 400(6KV)	500								/					1730	
300-250-270	min. 200L	30	982	500	450	300	600	465	404	1095	700	855	360	210	665	TB
	max. 250M	55								1125					790	
300-250-280	min. 200L	30	982	500	450	300	600	465	404	1095	700	855	360	210	665	TB
	max. 315S	110								1155					1100	
300-250-390	min. 280M	90	1094	500	500	300	630	450	417	1235	850	1200	635	350	910	TB/TK
	max. 315L	200								1265					1170	
300-250-490	min. 315L	160	1260	550	550	300	600	605	583	1430	840	1180	560	315	1030	TK/TJ
	max. 355(6KV)	315								/					2200	
300-250-610	min. 355(6KV)	280	1280	650	550	350	630	605	640	/	860	1210	590	315	2200	TJ
	max. 400(6KV)	560								/					2300	
350-300-310	min. 250M	55	1134	600	520	300	670	490	465	1275	865	1300	670	430	790	TB
	max. 315S	110								1305					1100	
350-300-330	min. 250M	55	1134	600	520	300	670	490	465	1275	865	1300	670	430	790	TB/TK
	max. 315L	160								1305					1170	
400-300-450	min. 315M	200	1260	650	550	350	700	605	590	1340	834	1250	630	315	1170	TK/TJ
	max. 400(6KV)	355								/					2300	
400-350-360	min. 315S	110	1323	670	570	350	725	600	513	1500	834	1350	725	350	1100	TK
	max. 315L	160								1500					1170	
400-350-380	min. 315S	110	1323	670	570	350	725	600	513	1500	834	1350	725	350	1100	TK
	max. 355M	250								1500					1400	

Assembly

HORIZONTAL INSTALLATION

CODE	DESCRIPTION
02.05.001	Shaft Circlip
05.02.005	Bearing assembly (DE)
05.02.002	Rotor assembly
04.02.002	Upper casing
02.17.019	Nameplate
04.09.001	Casing wear ring
05.02.001	Flushing water piping
05.02.006	Bearing assembly (NDE)
02.01.002	Bolt
05.02.003	Packing seal assembly
04.02.001	Lower casing
05.02.004	Mechanical seal assembly
05.02.007	Drainage pipe
02.07.002	Wear ring dowel pin


DE = Drive End
NDE = NO Drive End

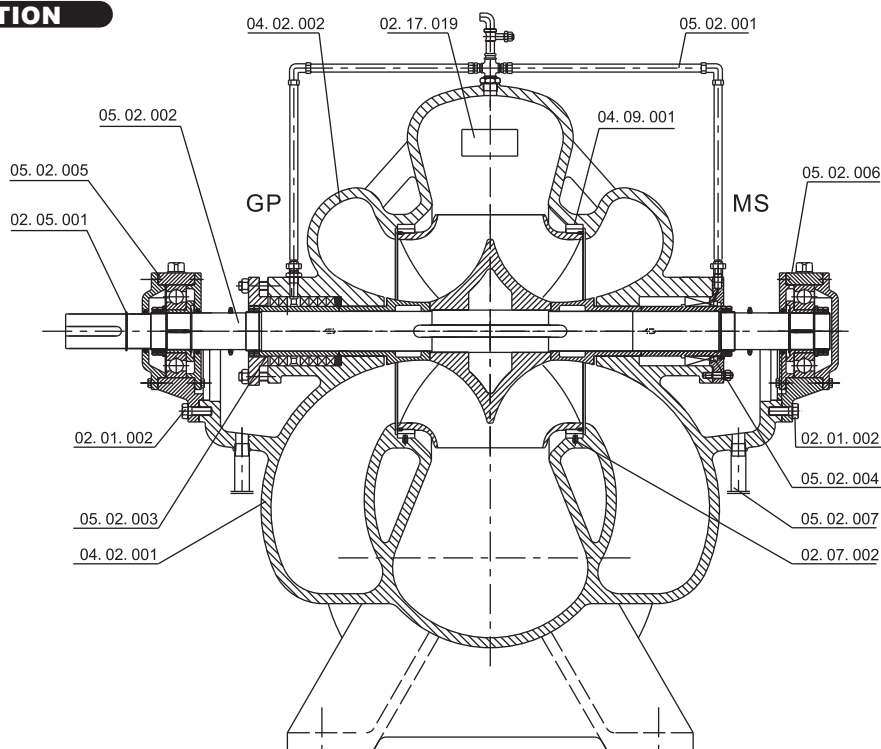

- TYPE A -
Without separate sealing body

CODE	DESCRIPTION
02.05.001	Shaft Circlip
05.02.005	Bearing assembly (DE)
05.02.002	Rotor assembly
04.02.002	Upper casing
02.17.019	Nameplate
04.09.001	Casing wear ring
05.02.001	Flushing water piping
05.02.006	Bearing assembly (NDE)
02.01.002	Bolt
05.02.004	Mechanical seal assembly
04.02.001	Lower casing
05.02.003	Packing seal assembly
02.16.002	Plug
02.07.002	Wear ring dowel pin

DE = Drive End
NDE = NO Drive End

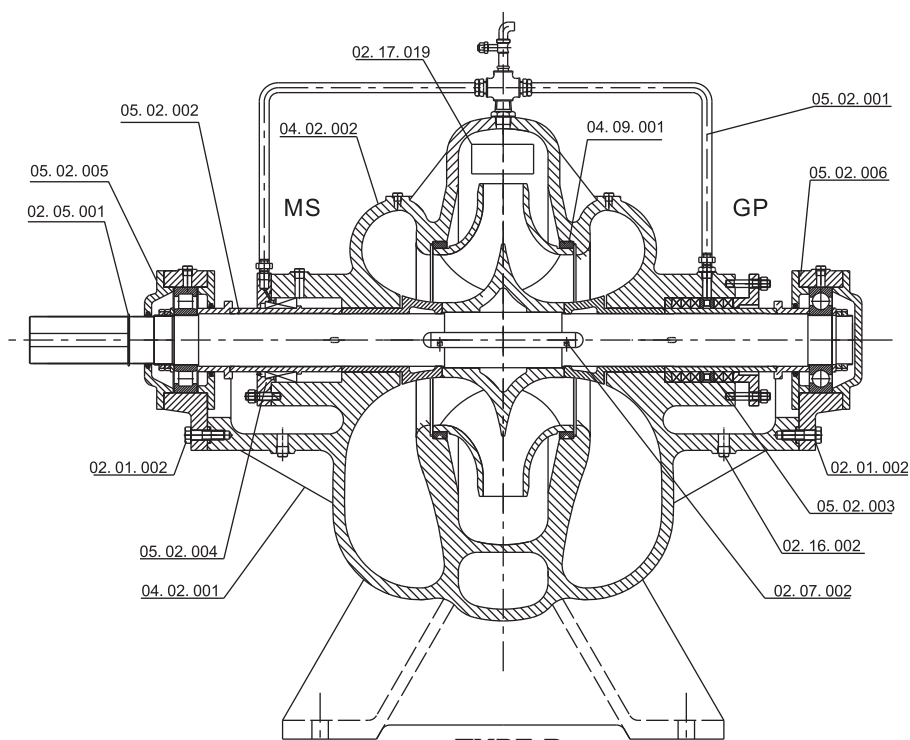


- TYPE B -
Without separate sealing body



CODE	DESCRIPTION
02.05.001	Shaft Circlip
05.02.005	Bearing assembly (DE)
05.02.002	Rotor assembly
04.02.002	Upper casing
02.17.019	Nameplate
04.09.001	Casing wear ring
05.02.001	Flushing water piping
05.02.006	Bearing assembly (NDE)
02.01.002	Bolt
05.02.003	Packing seal assembly
04.02.001	Lower casing
05.02.004	Mechanical seal assembly
02.16.002	Plug
02.07.002	Wear ring dowel pin

DE = Drive End
NDE = NO Drive End

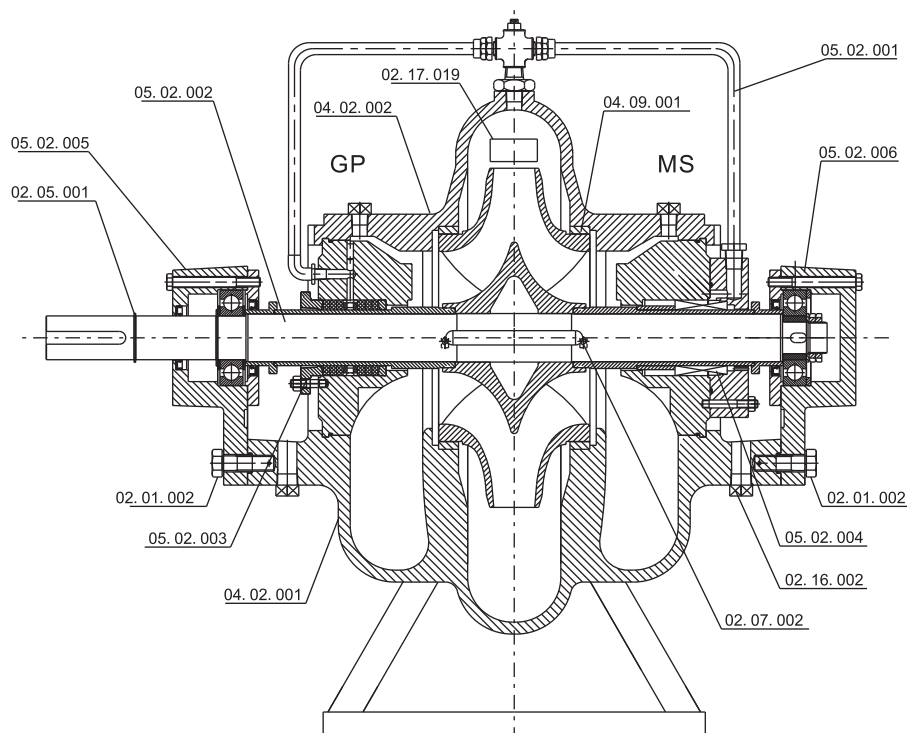


- TYPE A -
Separate sealing body

VERTICAL INSTALLATION


CODE	DESCRIPTION
02.05.001	Shaft Circlip
05.02.005	Bearing assembly (DE)
05.02.002	Rotor assembly
04.02.002	Upper casing
02.17.019	Nameplate
04.09.001	Casing wear ring
05.02.001	Flushing water piping
04.02.026	Cap
04.02.035	Motor riser
02.01.002	Bolt
05.02.004	Mechanical seal assembly
04.02.001	Lower casing
02.07.002	Wear ring dowel pin
04.01.022	Bearing bush
04.02.030	Foot

DE = Drive End

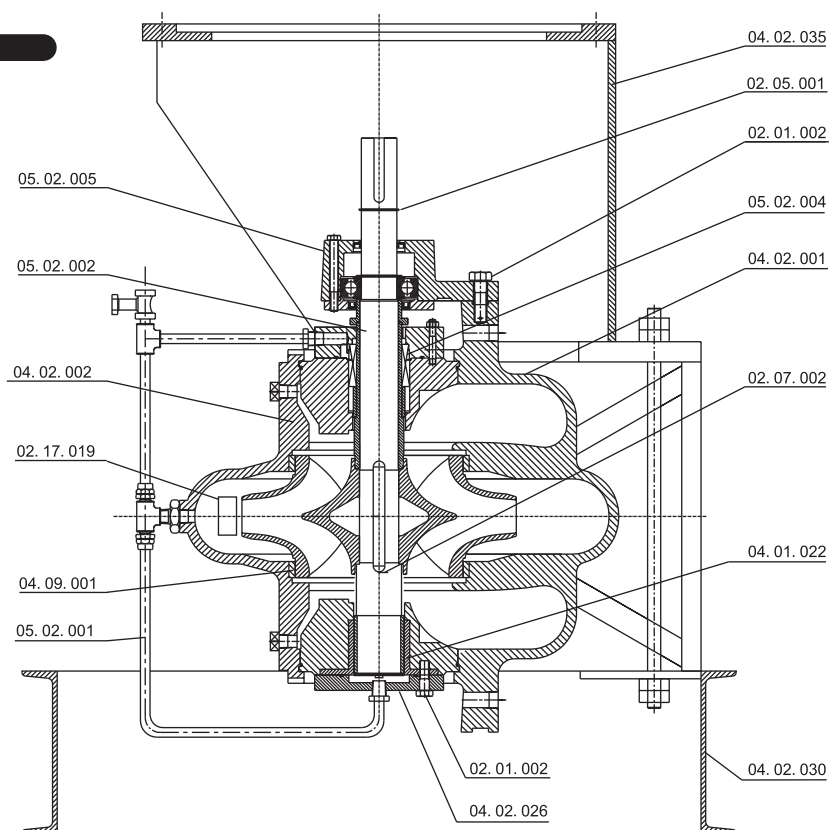

Soft packed stuffing box


CODE	DESCRIPTION
04.02.012	Set neck ring
02.11.003	Gland packing
04.09.002	Lantern ring
04.02.022	Shaft protecting sleeve
04.09.005	Gland
02.03.003	Nut
02.02.002	Bolt
02.03.004	Round nut

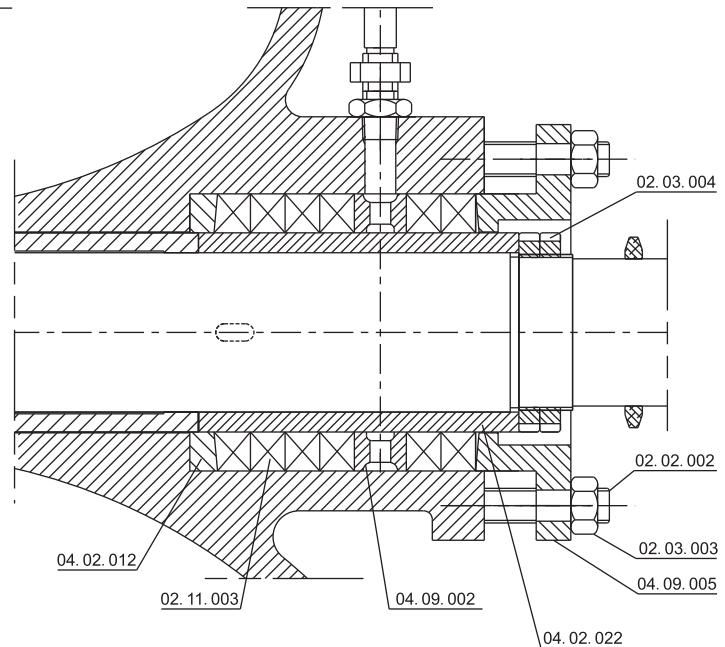

- TYPE A -

Apply to horizontal installation type A and B.

CODE	DESCRIPTION
04.09.005	Gland
04.02.022	Shaft protecting sleeve
04.02.012	Set neck ring
02.11.003	Gland packing
04.09.002	Lantern ring
02.13.001	O-Ring
02.02.002	Bolt
02.03.003	Nut

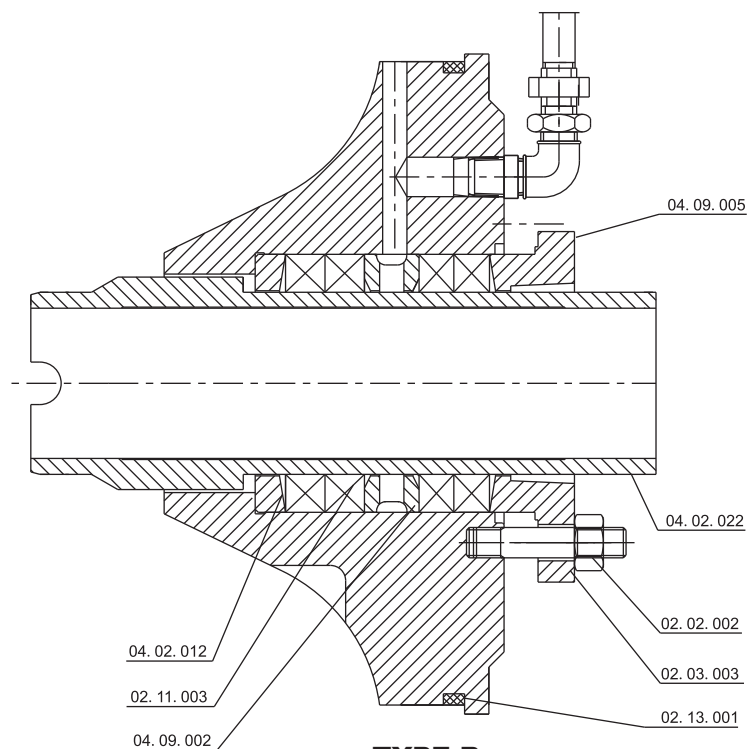


- TYPE B -

Apply to horizontal installation type C.

Mechanical seal


CODE	DESCRIPTION
04.02.011	Seal cover
04.02.023	Shaft protecting sleeve
02.03.004	Round nut
02.06.001	Round pin
02.13.004	Shaft seal unit
02.03.003	Nut
02.02.002	bolt
02.13.001	O-Ring

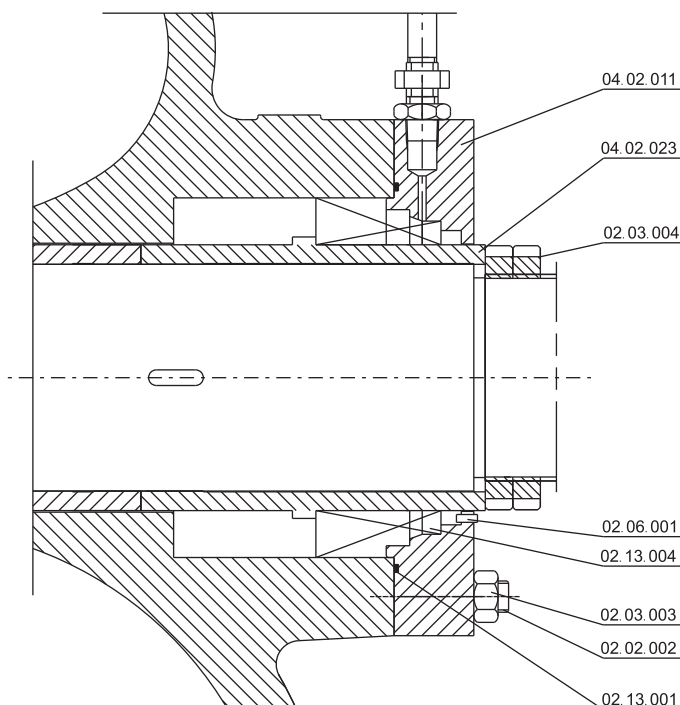

- TYPE A -

Apply to horizontal installation type A and B.

CODE	DESCRIPTION
04.02.011	Seal cover
04.02.023	Shaft protecting sleeve
02.06.001	Round pin
02.13.004	Shaft seal unit
02.02.002	Bolt
02.03.003	Nut
02.13.001	O-Ring
04.02.015	Shaft seal housing
04.02.020	Spacer sleeve

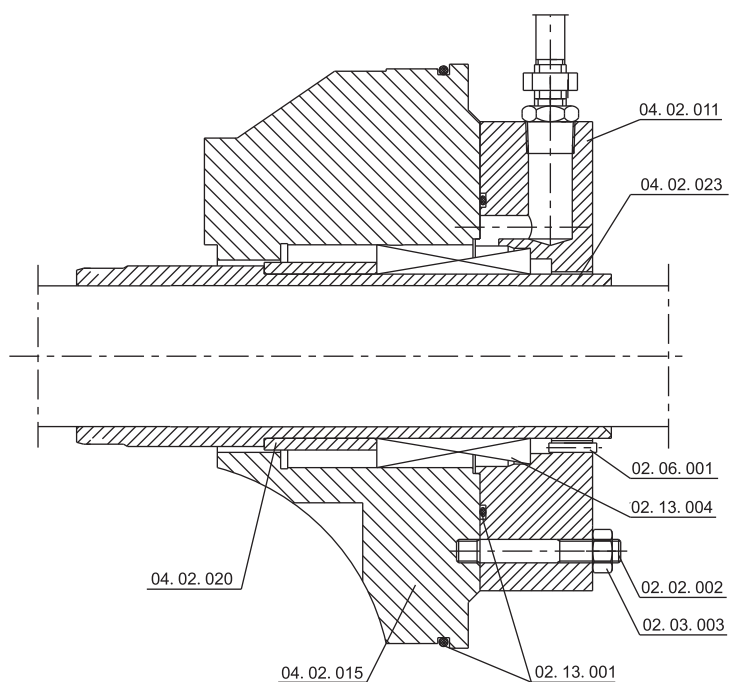


- TYPE B -

Apply to horizontal installation type C.




Rotor

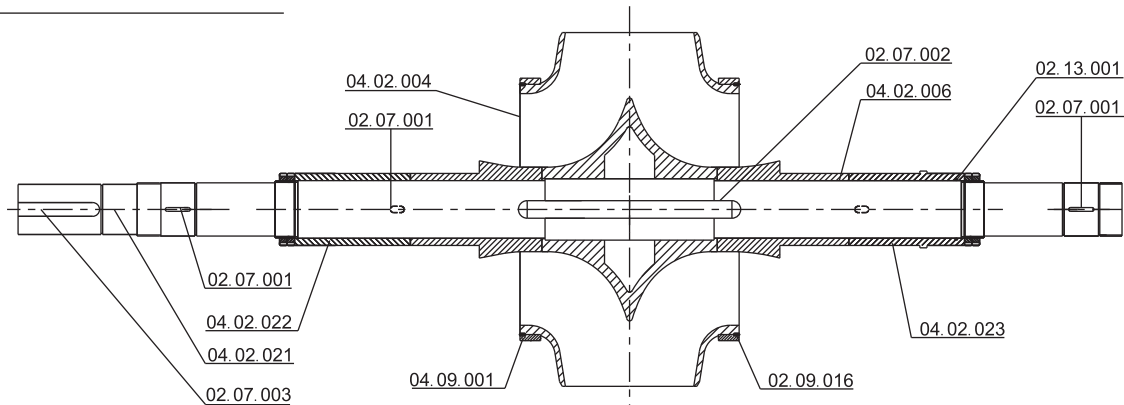

- TYPE A -

Apply to horizontal installation type A.

CODE	DESCRIPTION	02.09.016	Impeller locating screw	04.02.023	Shaft protecting sleeve(MS)
02.07.003	Key C	04.02.021	Shaft	02.07.001	Key A
04.02.004	Impeller	02.07.002	Key B	04.02.006	Shaft protecting sleeve
02.13.001	O-Ring	04.02.022	Shaft protecting sleeve(GP)	04.09.001	Impeller seal ring

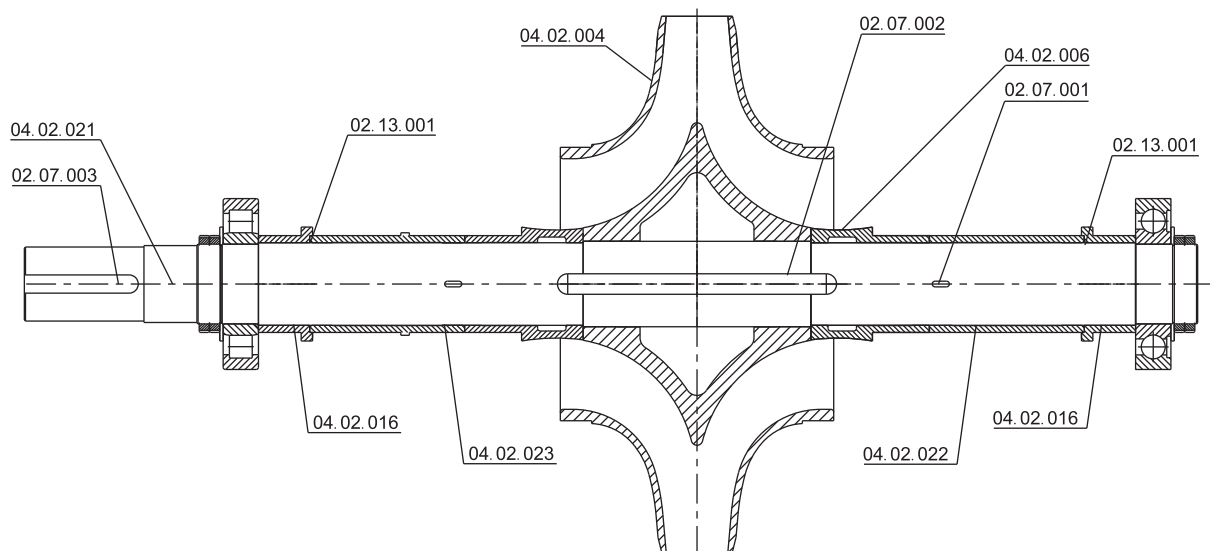


- TYPE B -

Apply to horizontal installation type B.

CODE	DESCRIPTION	04.02.022	Shaft protecting sleeve(GP)	02.13.001	O-Ring
02.07.003	Key C	04.02.021	Shaft	04.02.006	Shaft protecting sleeve
04.02.004	Impeller	02.07.002	Key B	04.02.023	Shaft protecting sleeve(MS)
02.07.001	Key A	04.02.016	Water baffle sleeve		



... Rotor

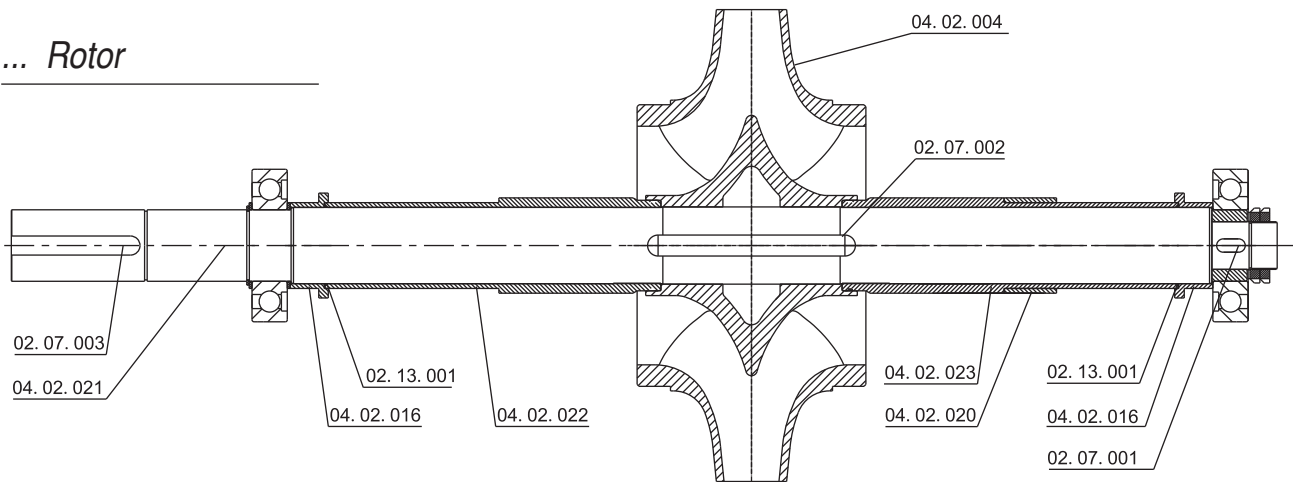

- TYPE C -

Apply to horizontal installation type C.


CODE	DESCRIPTION
02.07.003	Key C
04.02.004	Impeller
02.07.001	Key A

04.02.023	Shaft protecting sleeve(MS)
04.02.021	Shaft
02.07.002	Key B
04.02.016	Water baffle sleeve

02.13.001	O-Ring
04.02.020	Spacer sleeve(MS)
04.02.022	Shaft protecting sleeve(GP)

Bearing

CODE	DESCRIPTION
02.01.002	Hex bolts
04.02.024	Bearing outer cover (DE)
04.02.019	Bearing sleeve
04.02.008	Bearing housing (NDE)
02.12.002	Felt ring
02.08.001	Deep groove ball bearing
04.02.025	Bearing inner cover (DE)
04.02.026	Bearing outer cover (NDE)
02.03.004	Round nut
02.16.002	Plug
04.02.007	Bearing housing (DE)
04.02.017	Bearing circlip
02.05.001	Shaft Circlip
04.02.027	Bearing inner cover (NDE)

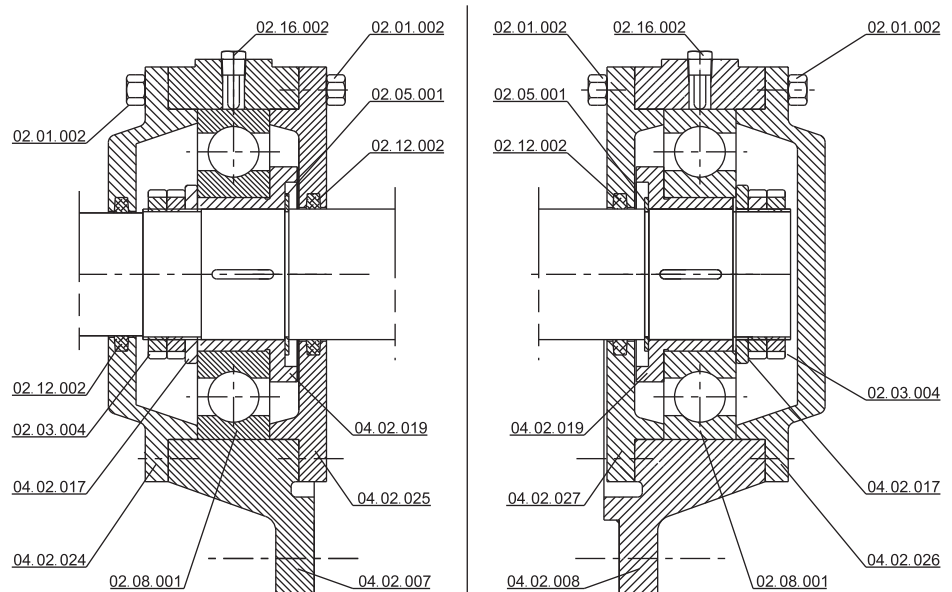



- TYPE A -

Apply to horizontal installation type A.

DE = Drive End
NDE = NO Drive End

CODE	DESCRIPTION
02.01.002	Hex bolts
04.02.024	Bearing outer cover (DE)
04.02.007	Bearing housing (DE)
04.02.026	Bearing outer cover (NDE)
02.12.002	Felt ring
02.08.002	Roller bearing
04.02.027	Bearing inner cover (NDE)
02.03.004	Round nut
02.16.002	Plug
04.02.008	Bearing housing (NDE)
04.02.017	Bearing circlip
04.02.025	Bearing inner cover (DE)
02.08.001	Deep groove ball bearing

DE = Drive End
NDE = NO Drive End

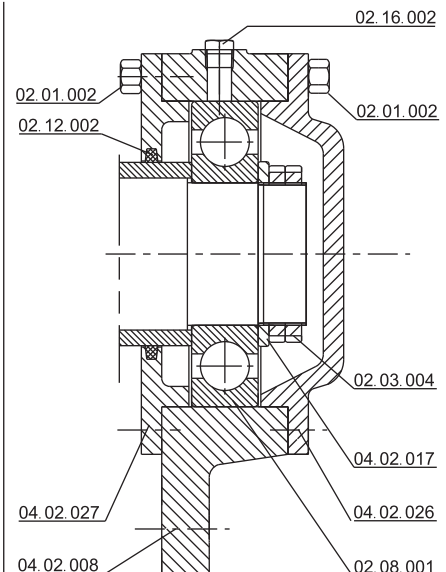
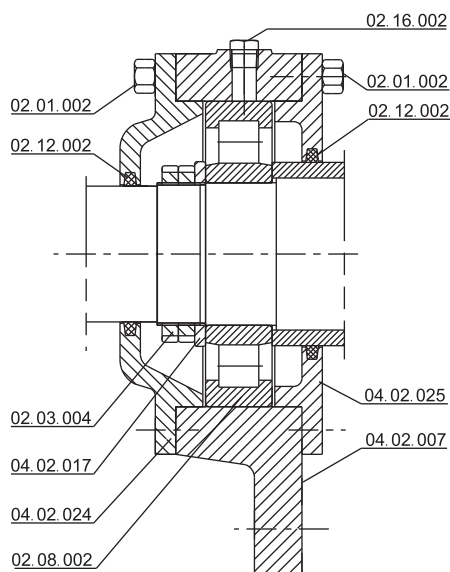


- TYPE B -

Apply to horizontal installation type B.

CODE	DESCRIPTION
02.01.002	Hex bolts
02.08.001	Deep groove ball bearing
04.02.007	Bearing housing (DE)
04.02.019	Bearing sleeve
02.13.002	Lip-type seal ring
02.16.002	Plug
04.02.027	Bearing inner cover (NDE)
02.03.004	Round nut
02.05.001	Shaft Circlip
02.10.001	Straight-through type oil cup
04.02.008	Bearing housing (NDE)
02.04.005	Spring
04.02.017	Bearing circlip
04.02.025	Bearing inner cover (DE)
04.02.018	Bearing locating ring

DE = Drive End
NDE = NO Drive End

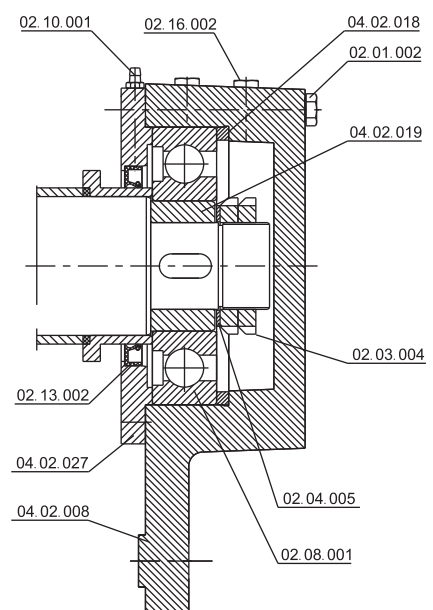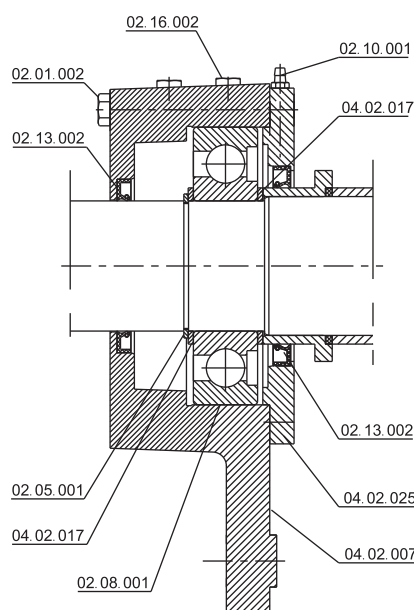


- TYPE C -

Apply to horizontal installation type C.



Bearing with oil lubrication

CODE	DESCRIPTION
02.13.002	Lip-type seal ring
02.08.001	Deep groove ball bearing
02.01.002	Hex bolts
04.02.008	Bearing housing (NDE)
02.03.004	Round nut
04.07.042	Breather cap
04.02.025	Bearing inner cover (DE)
02.14.003	Oil sight gauge
04.02.017	Bearing circlip
02.20.001	Temperature measuring device
04.02.007	Bearing housing (DE)
02.10.005	Constant level oiler
02.16.002	Plug
02.13.001	O-Ring
04.02.027	Bearing inner cover (NDE)

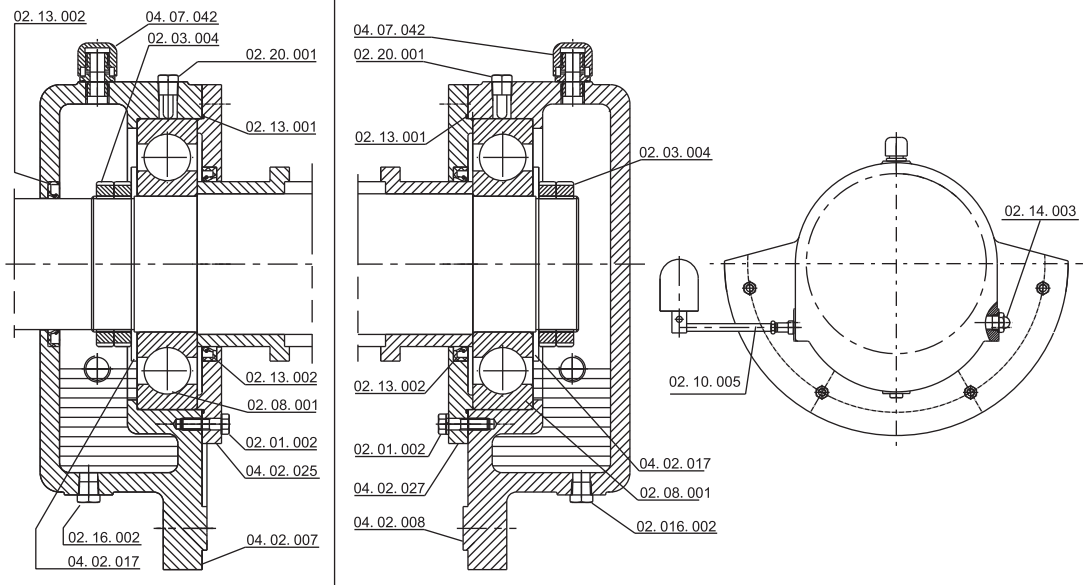


DE = Drive End
NDE = NO Drive End

Bearing with water cooling

(Pumping higher temp. liquid)

CODE	DESCRIPTION
02.01.002	Hex bolts
04.02.024	Bearing outer cover(DE)
04.02.025	Bearing inner cover (DE)
04.02.026	Bearing outer cover (NDE)
02.12.002	Felt ring
02.08.001	Deep groove ball bearing
04.02.007	Bearing housing (DE)
02.16.002	Plug
02.03.004	Round nut
02.05.001	Shaft Circlip
04.02.027	Bearing inner cover (NDE)
05.02.001	Cooling Piping
04.02.017	Bearing circlip
04.02.019	Bearing sleeve
04.02.008	Bearing housing (NDE)

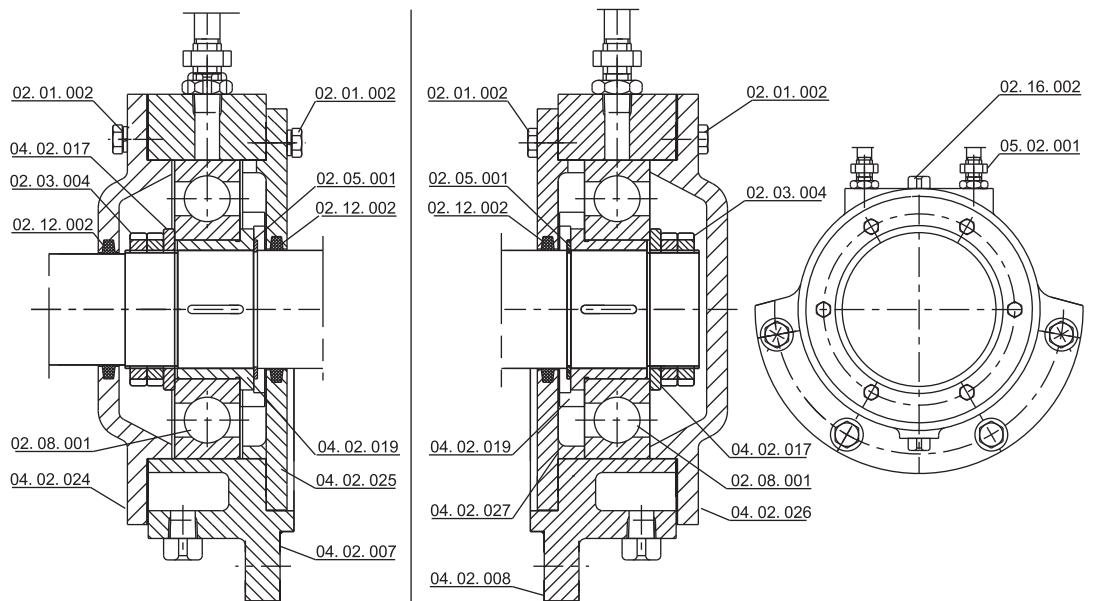

DE = Drive End
NDE = NO Drive End



Recommended spare parts for commissioning.

Part No.	Part Name (Set)	QANTITY OF PUMPS INCLUDING STANDBY PUMPS				
		1	2	3	4	5
		Qty. of Spare Parts				
02.11.003 02.13.001 02.13.002	Gland packing O-Ring Lip-type seal ring	1	2	3	4	5
02.08.001 04.02.017	Deep groove ball bearings Bearing circlip	1	2	3	4	5
02.13.001 02.13.002	O-Ring Lip-type seal ring	1	2	3	4	5
02.13.004	Mechanical seal	1	2	3	4	5

**Soft Packed
Stuffing Box**

**Mechanical
Seal**

Recommended spare parts (per set) for 2 years operation.

8000 HOURS PER YEAR

04.02.021 04.02.019 02.03.004 02.05.001	Shaft Bearing sleeve Round nut Circlip	-	-	-	1	1
04.02.004	Impeller	1	2	2	2	2
02.08.001 04.02.017	Deep groove ball bearings Bearing circlip	1	1	1	2	2
04.09.005	Gland	-	-	-	1	1
02.13.001 02.13.002	O-Ring Lip-type seal ring	1	2	3	4	5
02.11.003	Gland packing	4	8	12	16	20
04.02.012	Set neck ring	-	-	-	1	1
04.09.002	Lantern ring	-	-	-	1	1
04.09.001	Wear ring	1	1	1	2	2
02.12.004	Gasket	1	1	1	2	2
04.02.022	Shaft sleeve	1	1	1	2	2
04.02.021 04.02.019 02.03.004 02.05.001	Shaft Bearing sleeve Round nut Circlip	-	-	-	1	1
04.02.004	Impeller	1	2	2	2	2
02.08.001 04.02.017	Deep groove ball bearings Bearing circlip	1	1	1	2	2
02.13.001 02.13.002	O-Ring Lip-type seal ring	1	2	3	4	5
02.13.004	Mechanical seal	1	1	1	2	2
04.09.001	Wear ring	1	1	1	2	2
02.12.004	Gasket	1	1	1	2	2
04.02.023	Shaft sleeve	1	1	1	2	2

**Soft Packed
Stuffing Box**

**Mechanical
Seal**

Scope of supply

PUMP WITH BARE SHAFT END:

Horizontal and vertical design, with finish coating, primer coating, and soft packed stuffing box or mechanical seal.

EXTRA CHARGES FOR:

- Oil lubricated bearing
- Portable water quality coating / finish coating
- Horizontal baseplate for pump and motor
- Motor stool for vertical arrangements
- Motor mounting
- Special coating treatment
- Witness test

EXTRA CHARGES FOR AVAILABLE ACCESSORIES:

- Coupling and coupling guard
- Set pressure gauges
- Set seal pipe
- Venting valve
- Temperature sensor for bearing (PT100)



Pump order data

- 1 – Description of the pump according to "DESIGNATION"
- 2 – Capacity (**Q**)
- 3 – Total head (**H**)
- 4 – Material combination
- 5 – Flange standard
- 6 – Shaft seal as soft packed stuffing box or mechanical seal
- 7 – Liquid handled and liquid temperature
- 8 – Direction of rotation / arrangement of the motor
- 9 – Accessories required
- 10 – Number and language of operating manual

Motor order data

(Provided by POMPE ZANNI)

- 1 – Protection
- 2 – Voltage, frequency, method of starting
- 3 – Ambient temperature
- 4 – Accessories required
- 5 – Insulation class
- 6 – Others




POMPE ZANNI®


PERFORMANCE RANGE



SPLIT CASING CENTRIFUGAL PUMP

2980
rpm

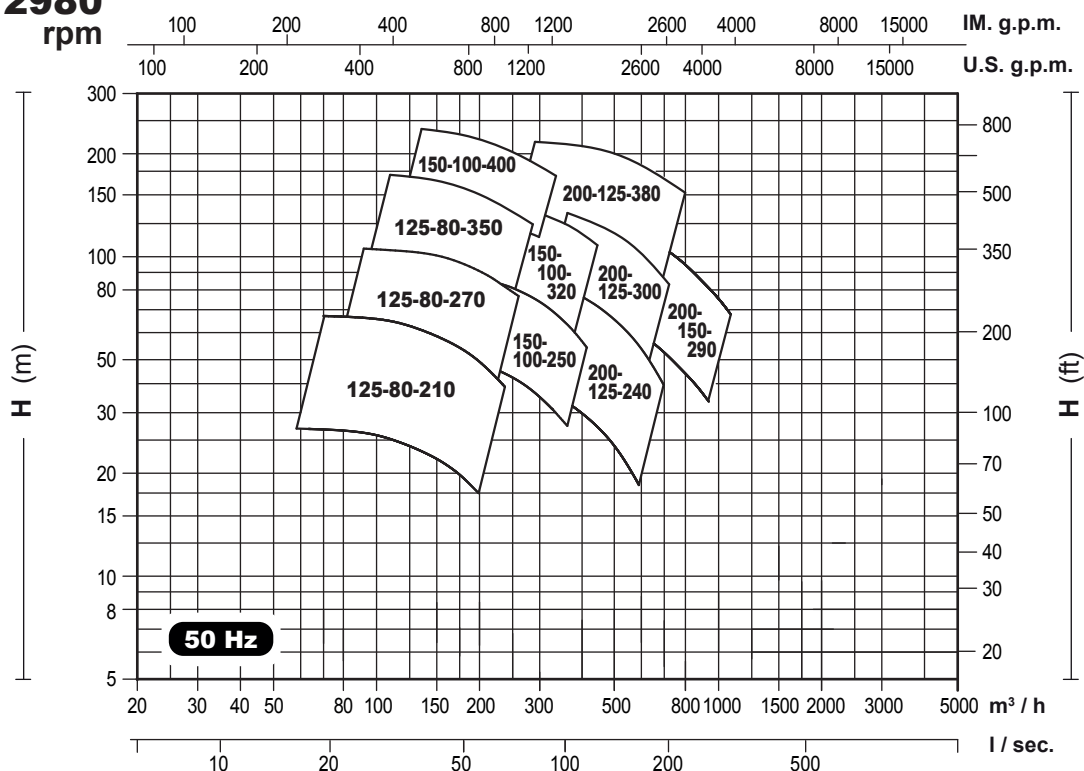

1480
rpm

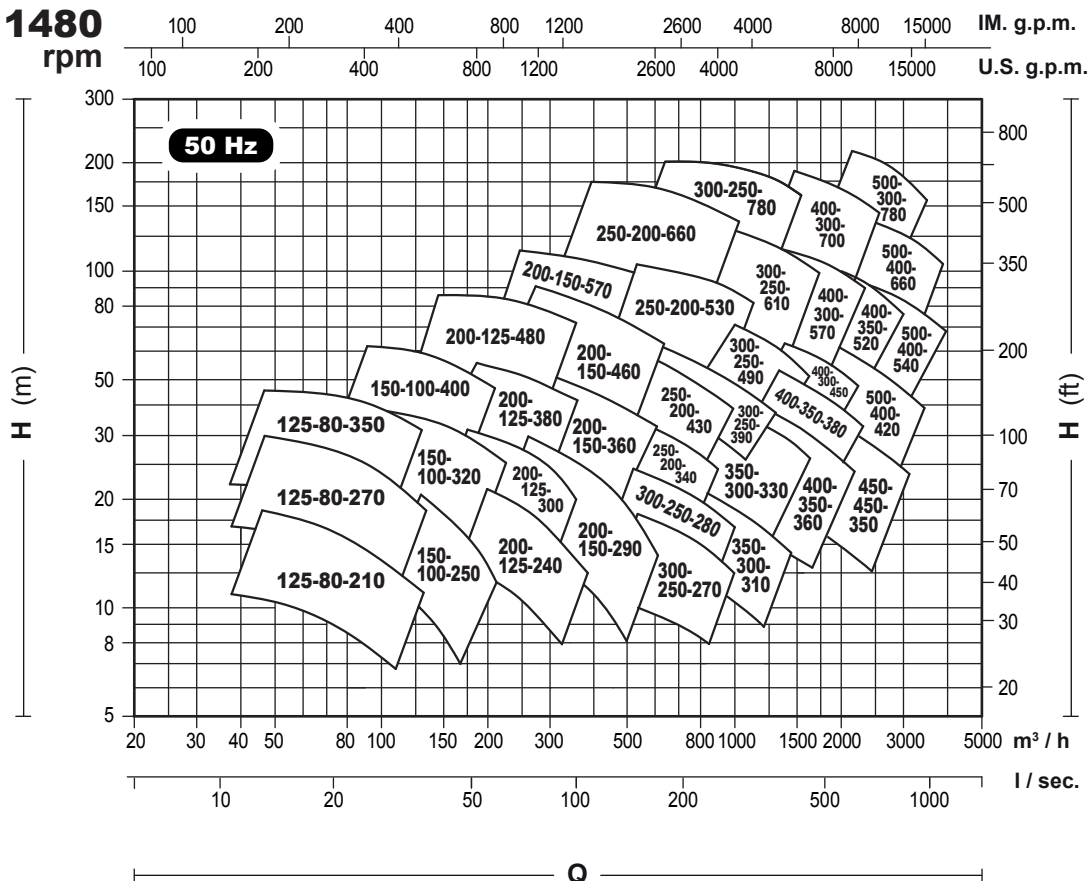

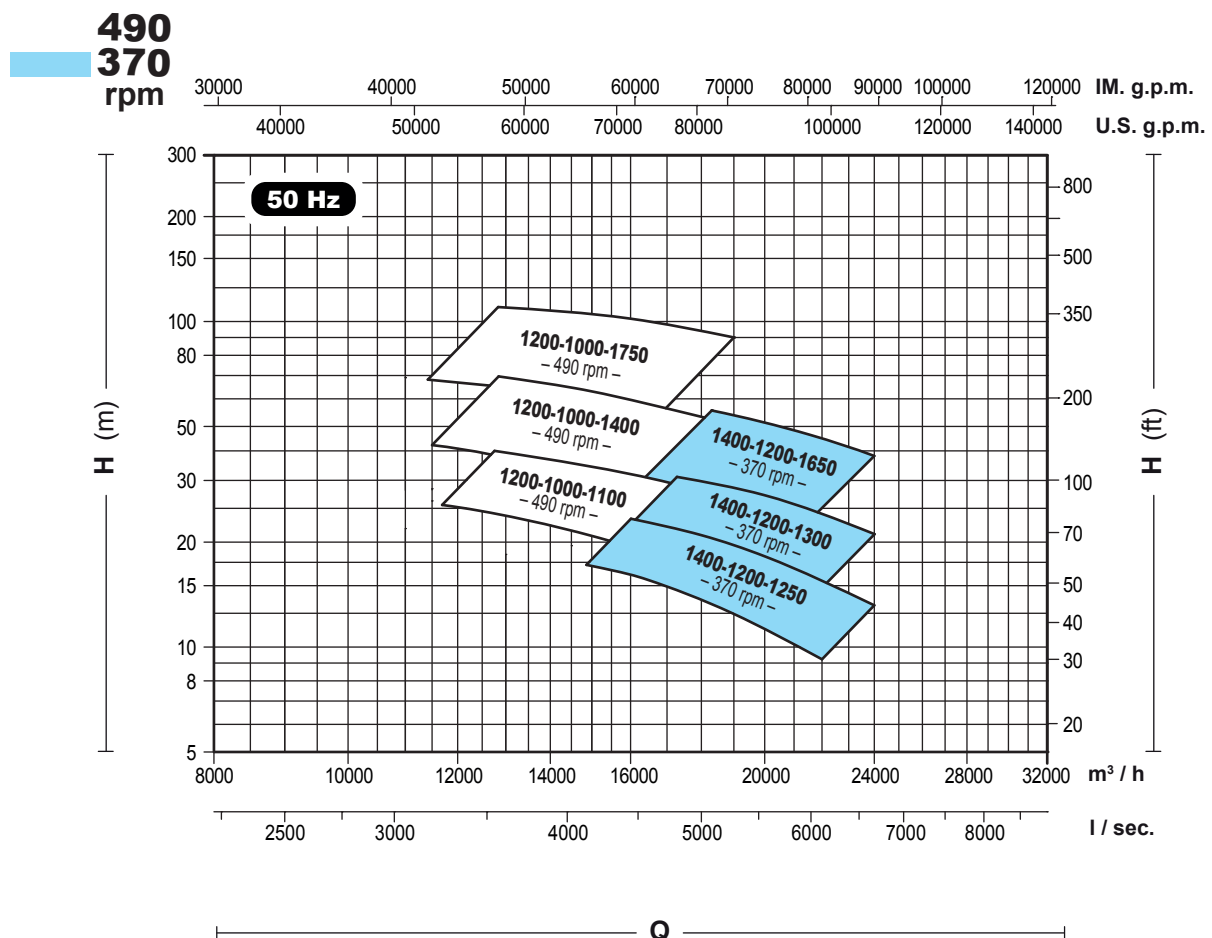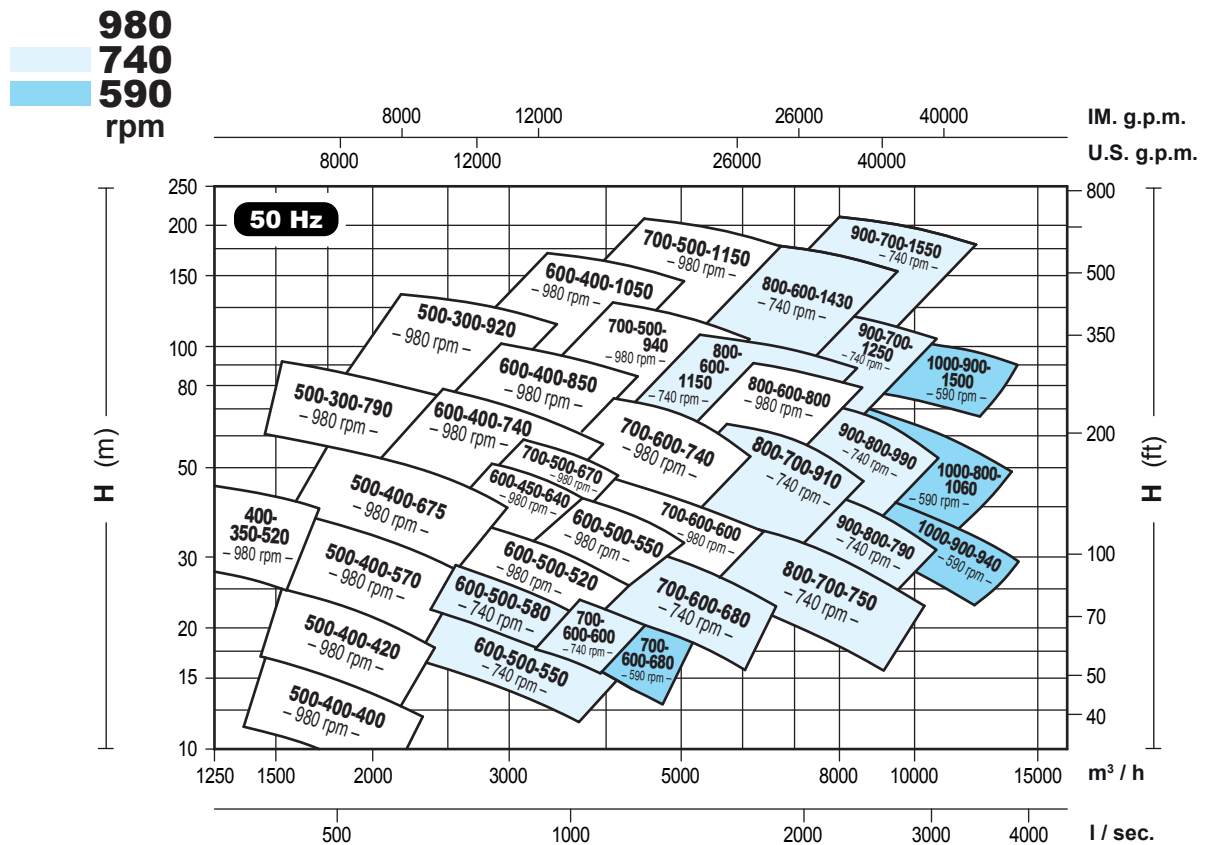

single stage double suction




POMPE ZANNI®

PERFORMANCE
CURVES

125-80-210

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 216 mm
 - B = Ø 200 mm
 - C = Ø 184 mm
 - D = Ø 170 mm

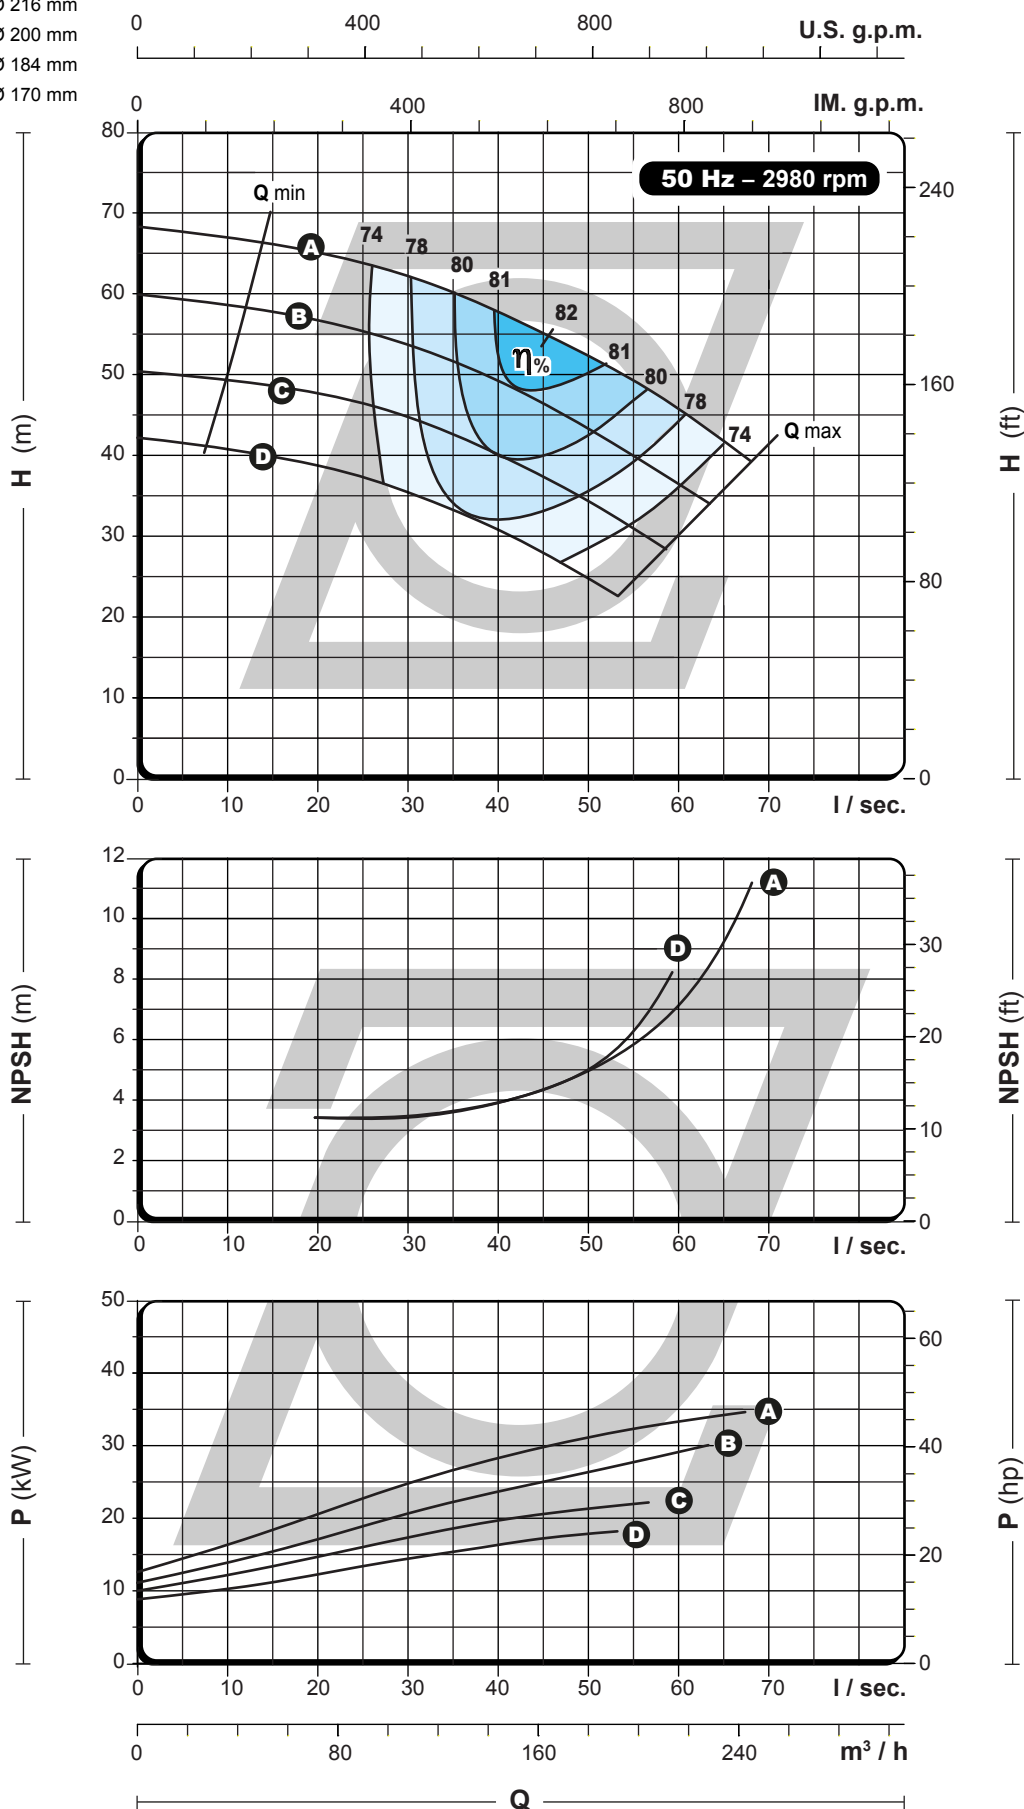

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®


PERFORMANCE
CURVES

125-80-270

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER

- A** = Ø 270 mm
- B** = Ø 254 mm
- C** = Ø 234 mm
- D** = Ø 215 mm

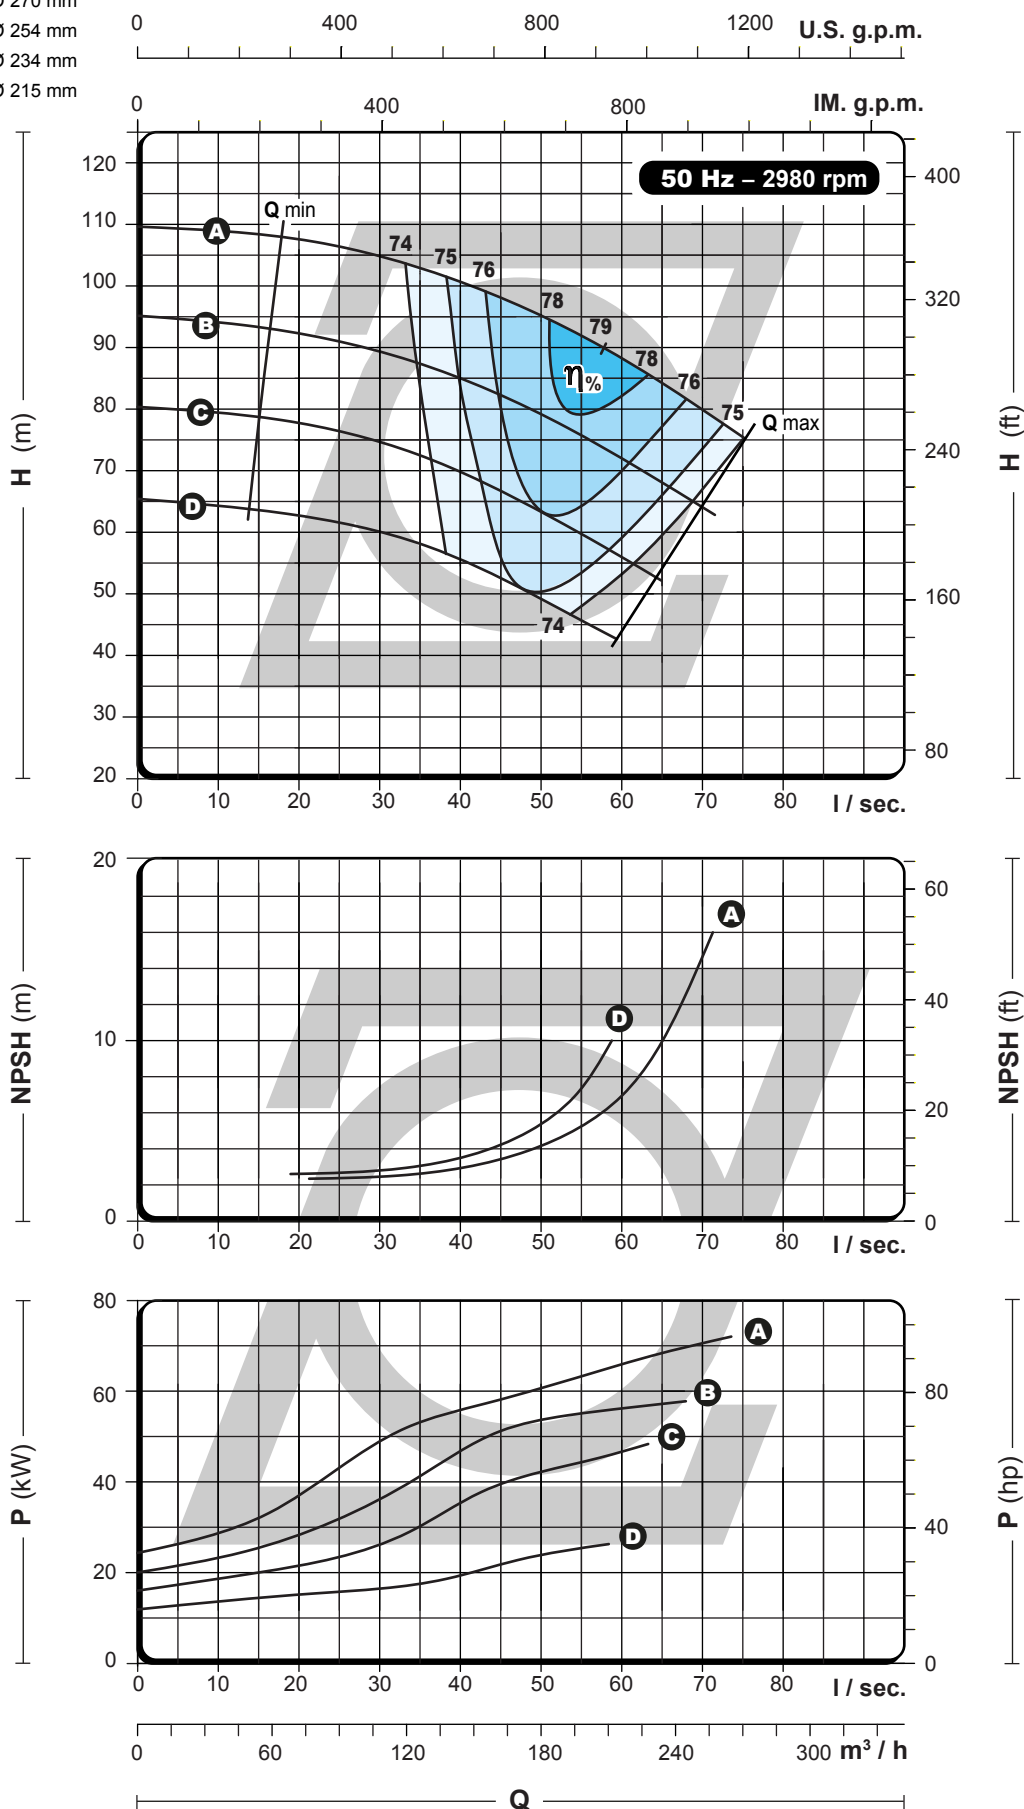

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

125-80-350

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 345 mm
B = Ø 310 mm
C = Ø 270 mm

0 200 400 600 800 1000 1200 U.S. g.p.m.

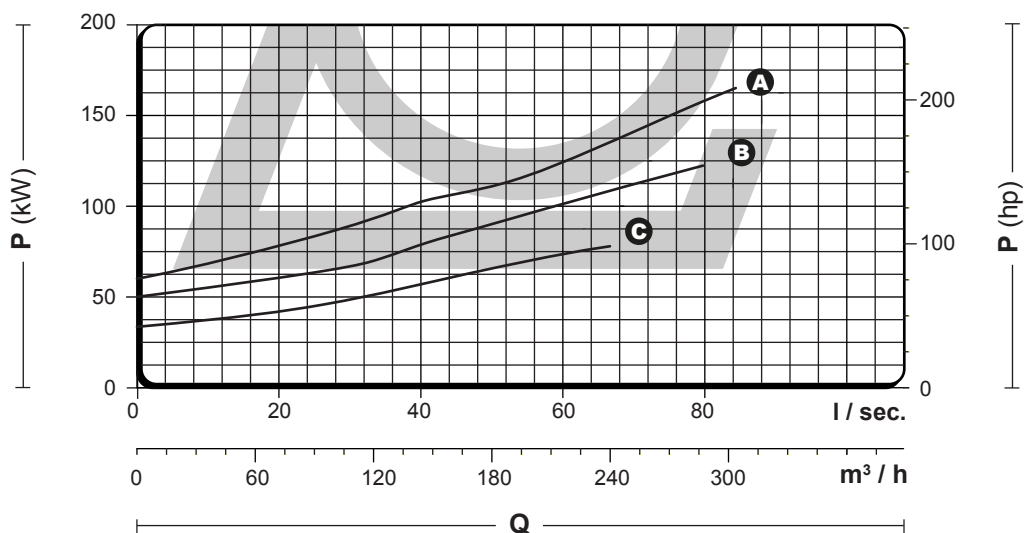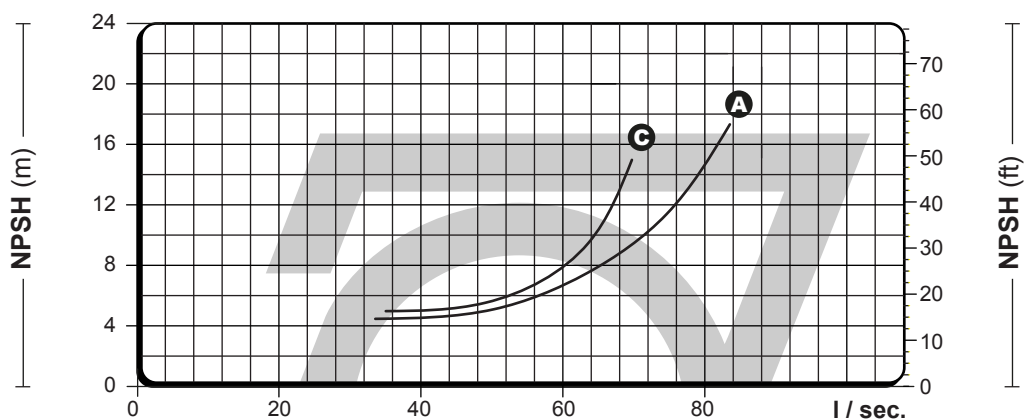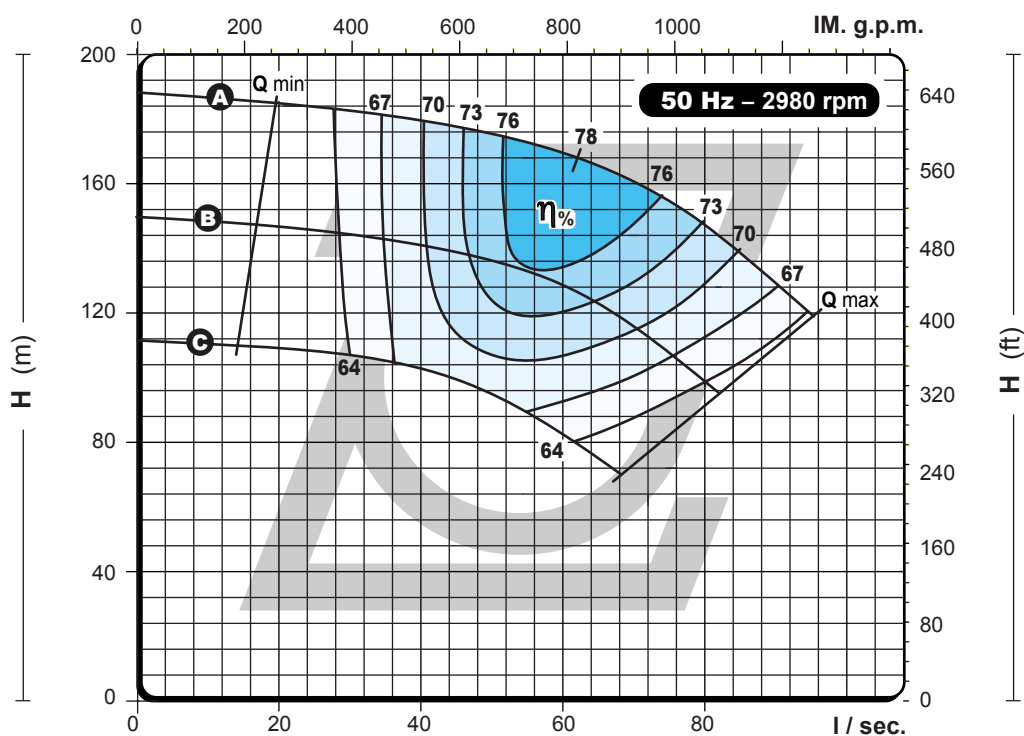

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

150-100-250

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 254 mm
B = Ø 230 mm
C = Ø 200 mm

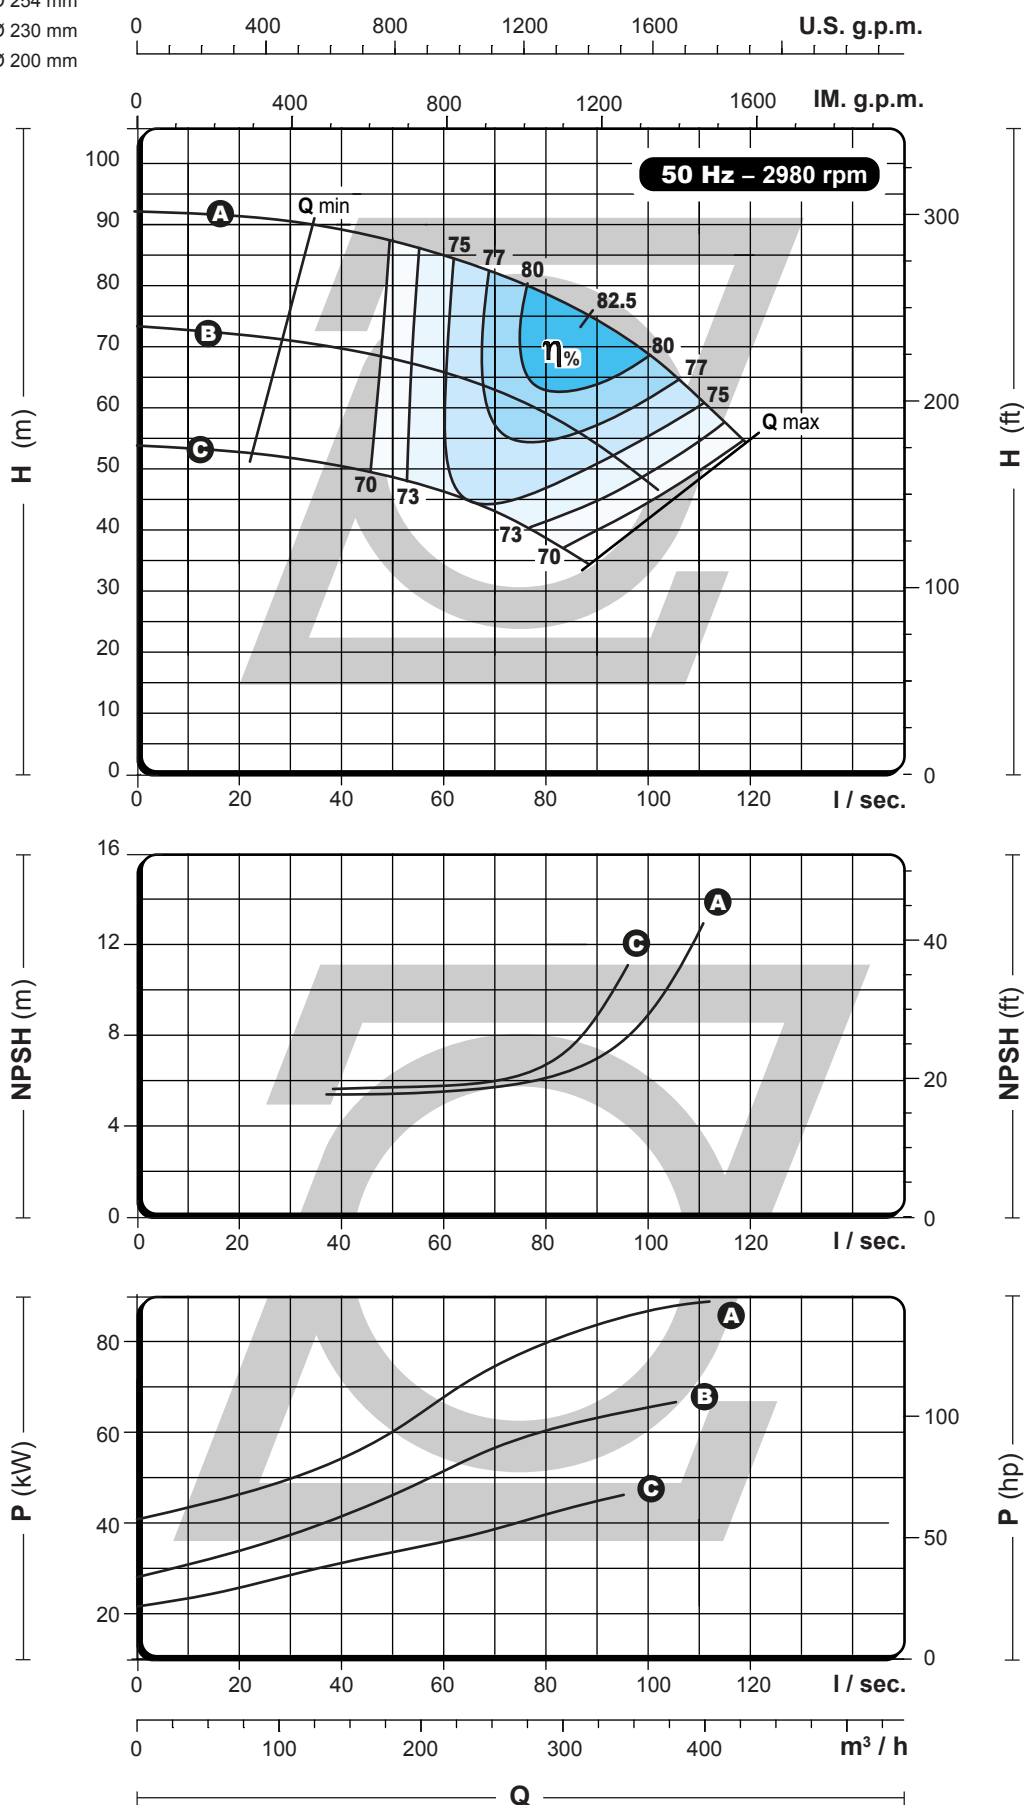

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




150-100-320

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 325 mm
 - B** = Ø 300 mm
 - C** = Ø 278 mm
 - D** = Ø 254 mm

0 400 800 1200 1600 2000 U.S. g.p.m.

0 400 800 1200 1600 IM. g.p.m.

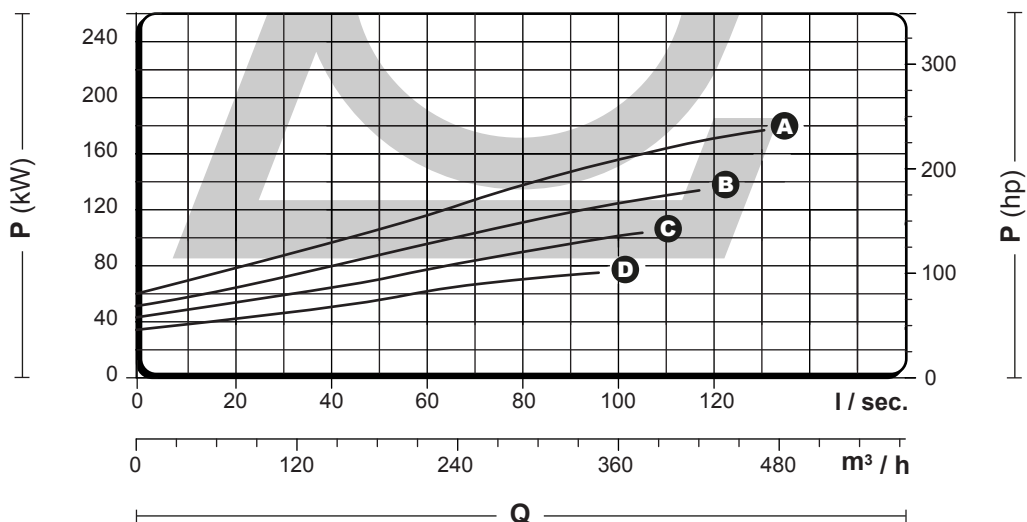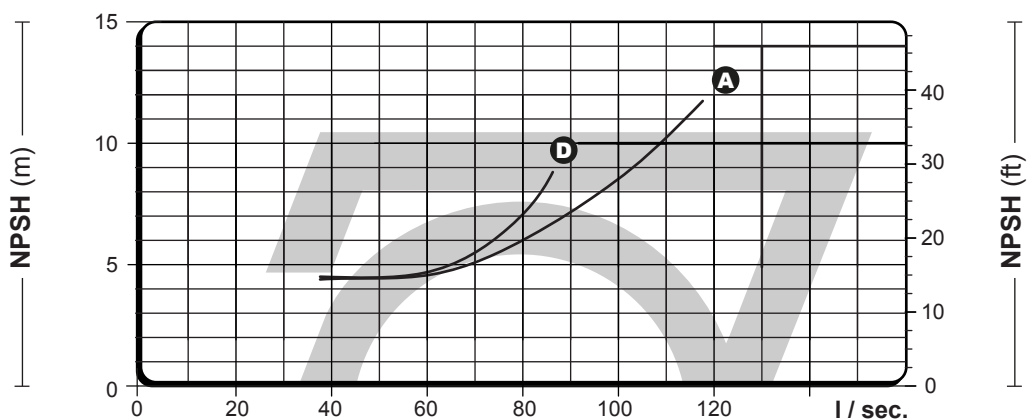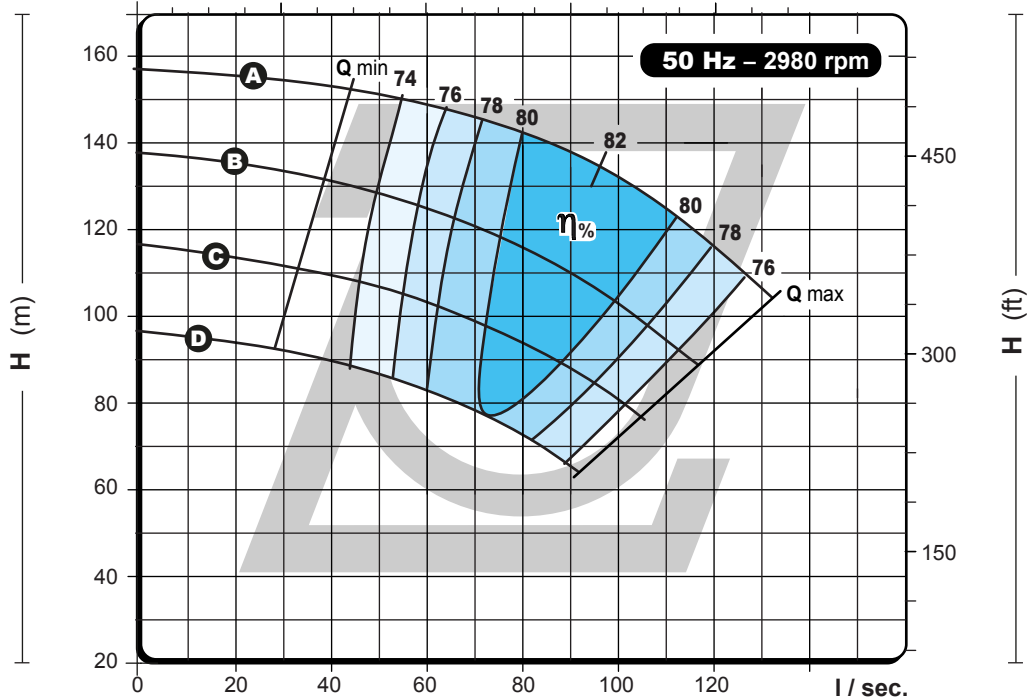

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

150-100-400

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 370 mm
B = Ø 340 mm
C = Ø 310 mm

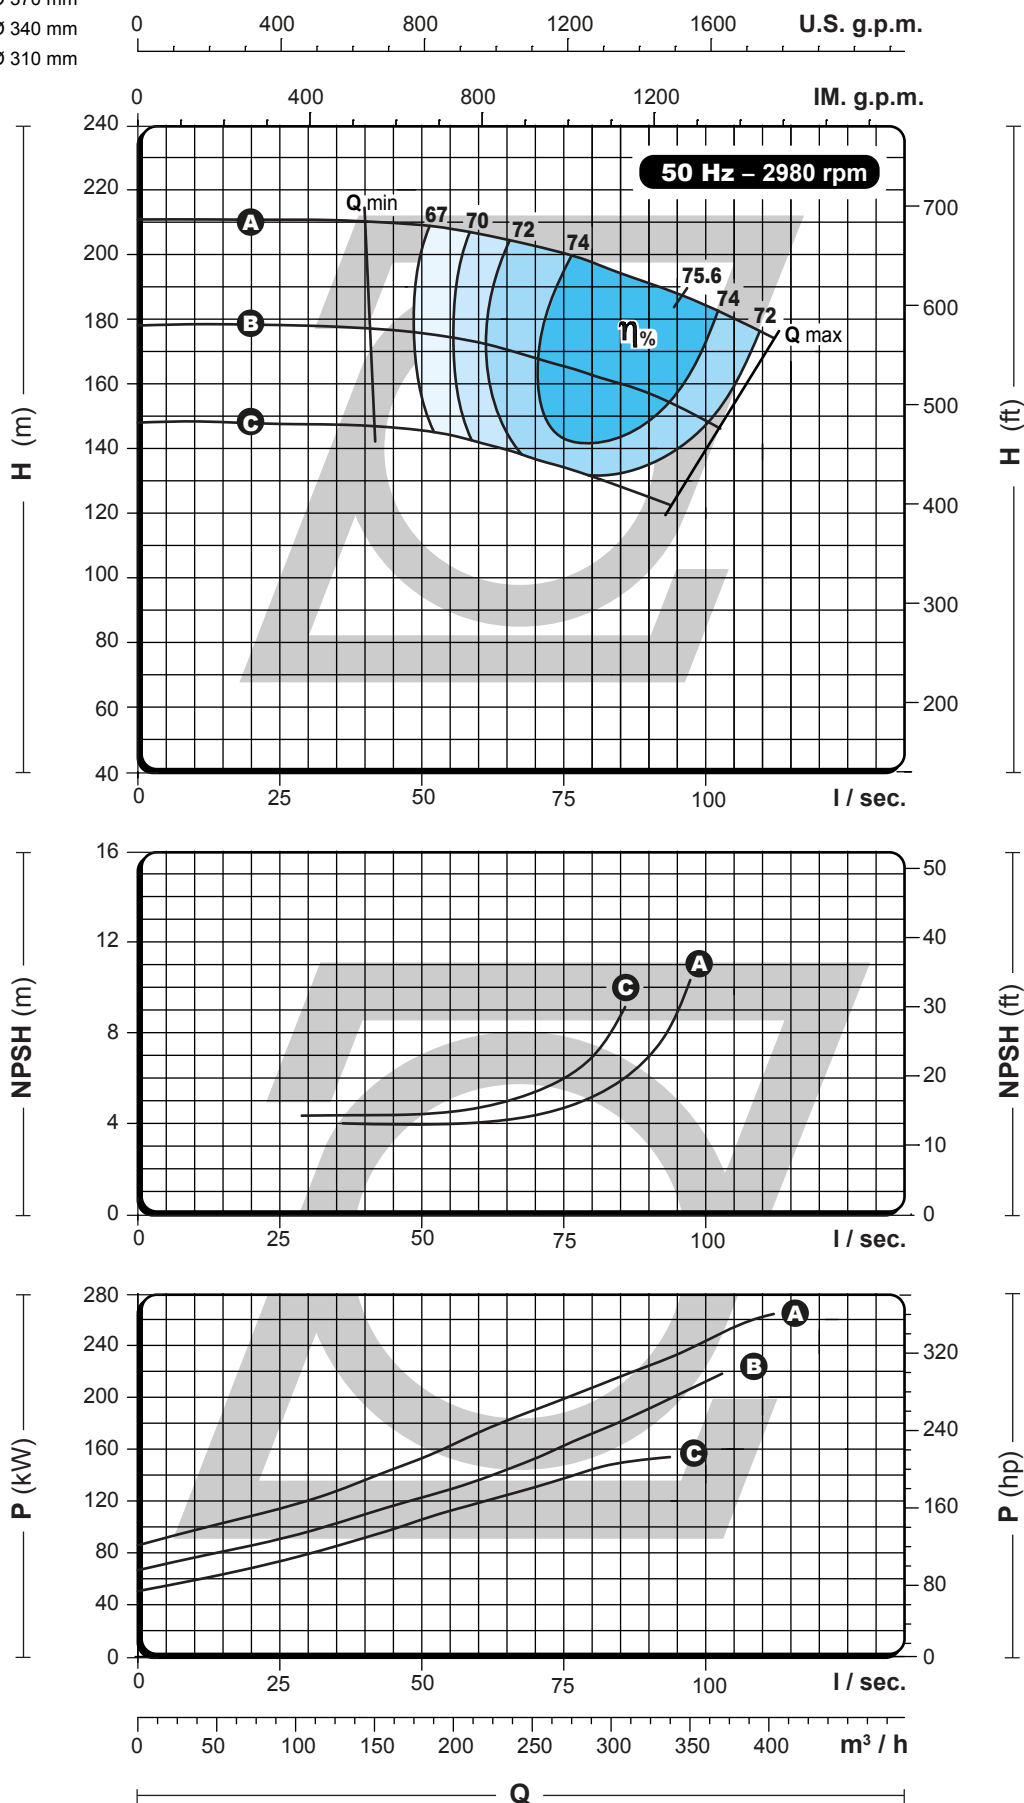

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

200-125-240

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 250 mm
 - B = Ø 230 mm
 - C = Ø 210 mm
 - D = Ø 190 mm

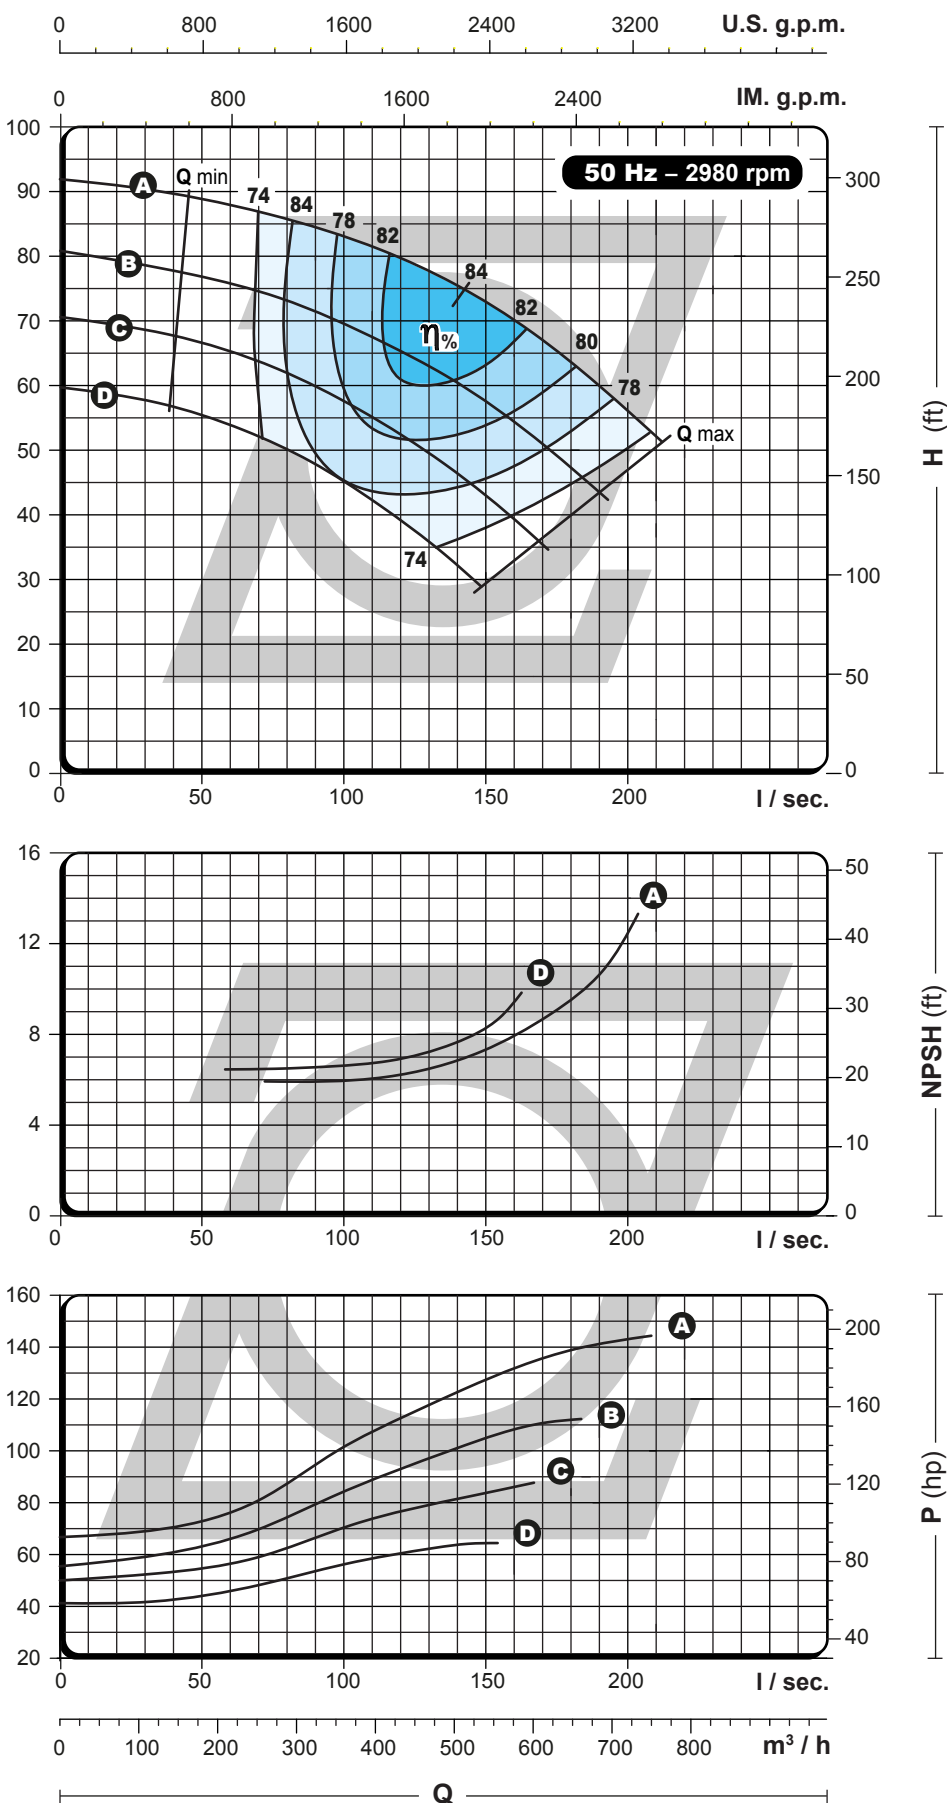

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

200-125-300

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER —
A = Ø 301 mm
B = Ø 260 mm
C = Ø 232 mm

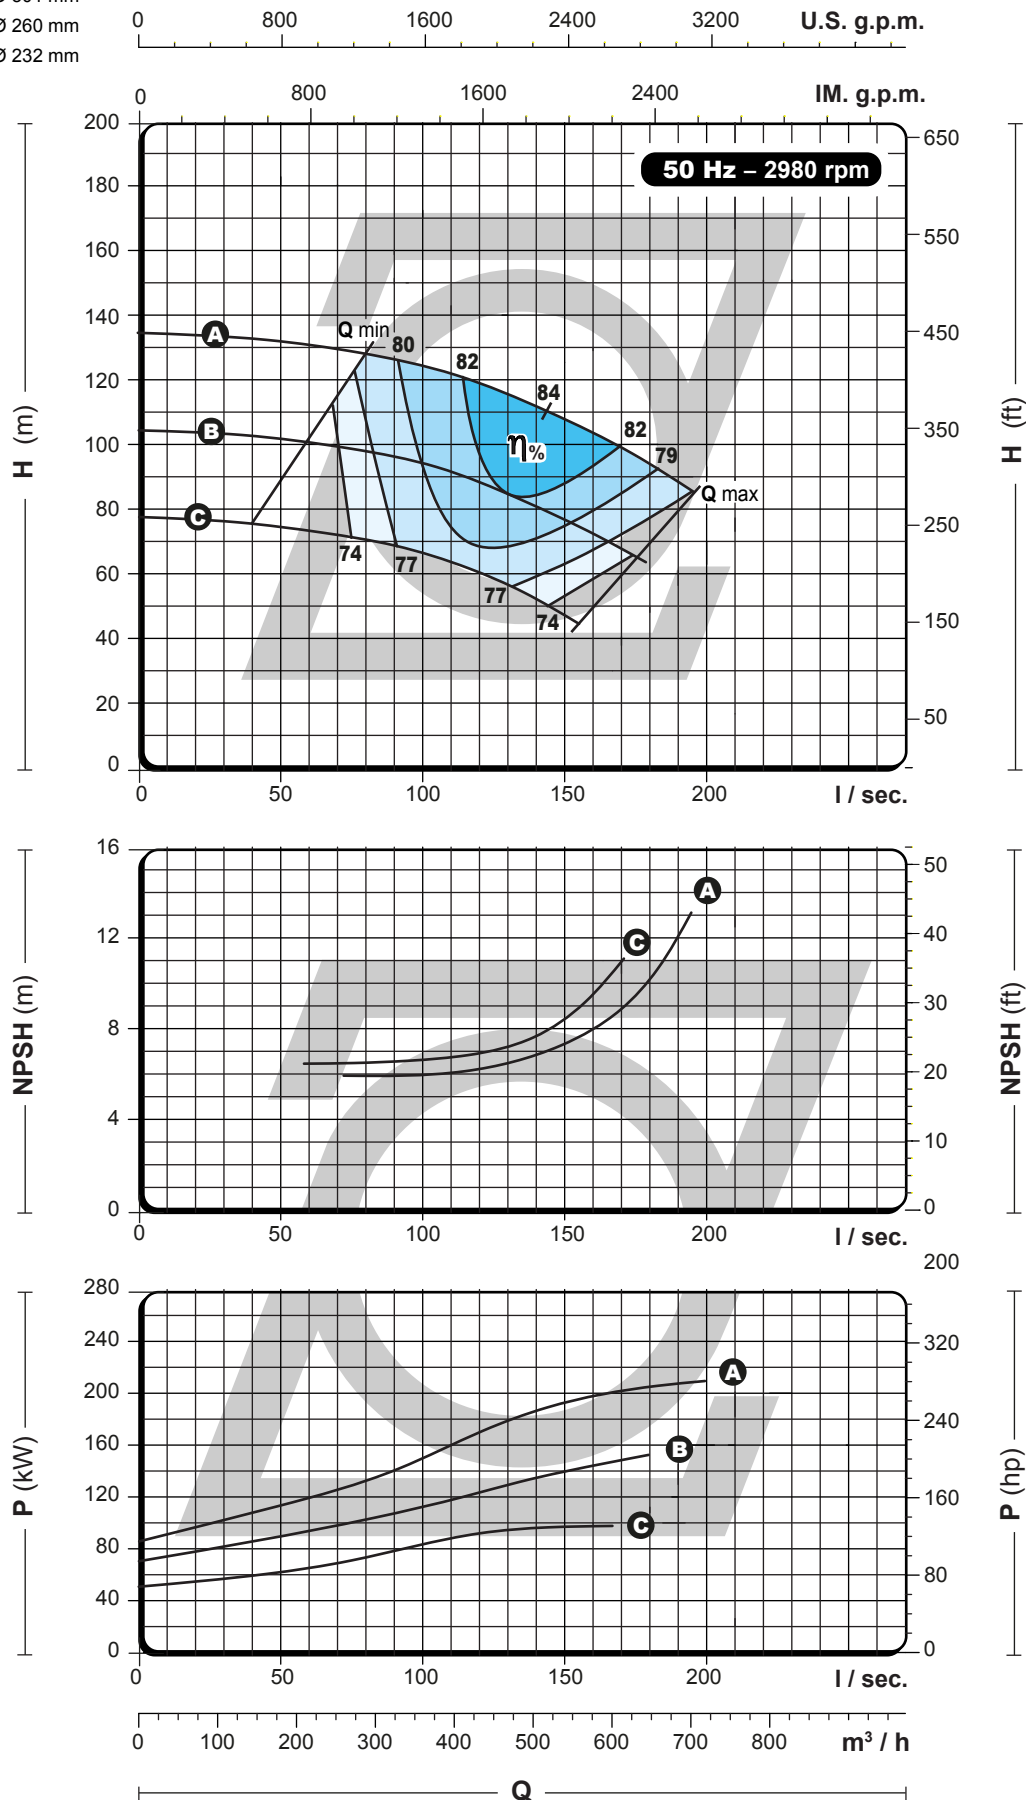

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




200-125-380

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER
A = Ø 365 mm
B = Ø 330 mm
C = Ø 295 mm

0 500 1000 1500 2000 2500 3000 3500 4000 U.S. g.p.m.

0 400 800 1200 1600 2000 2400 2800 3200 IM. g.p.m.

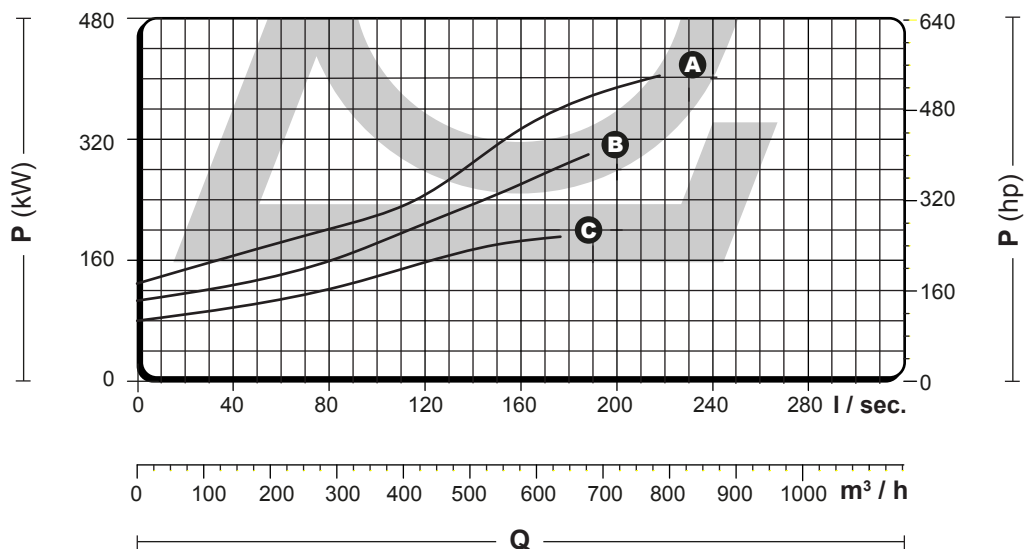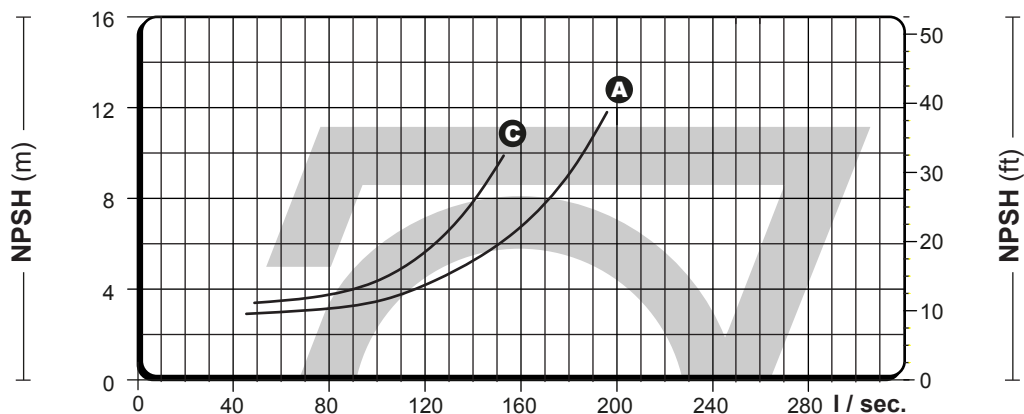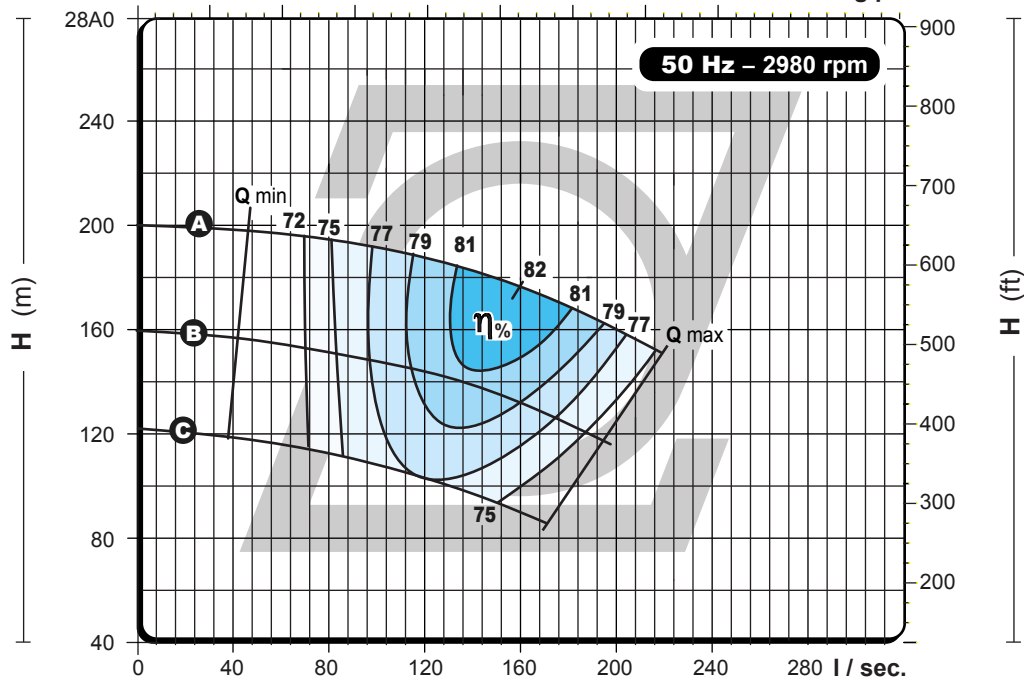

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

200-150-290

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 290 mm
B = Ø 255 mm
C = Ø 220 mm

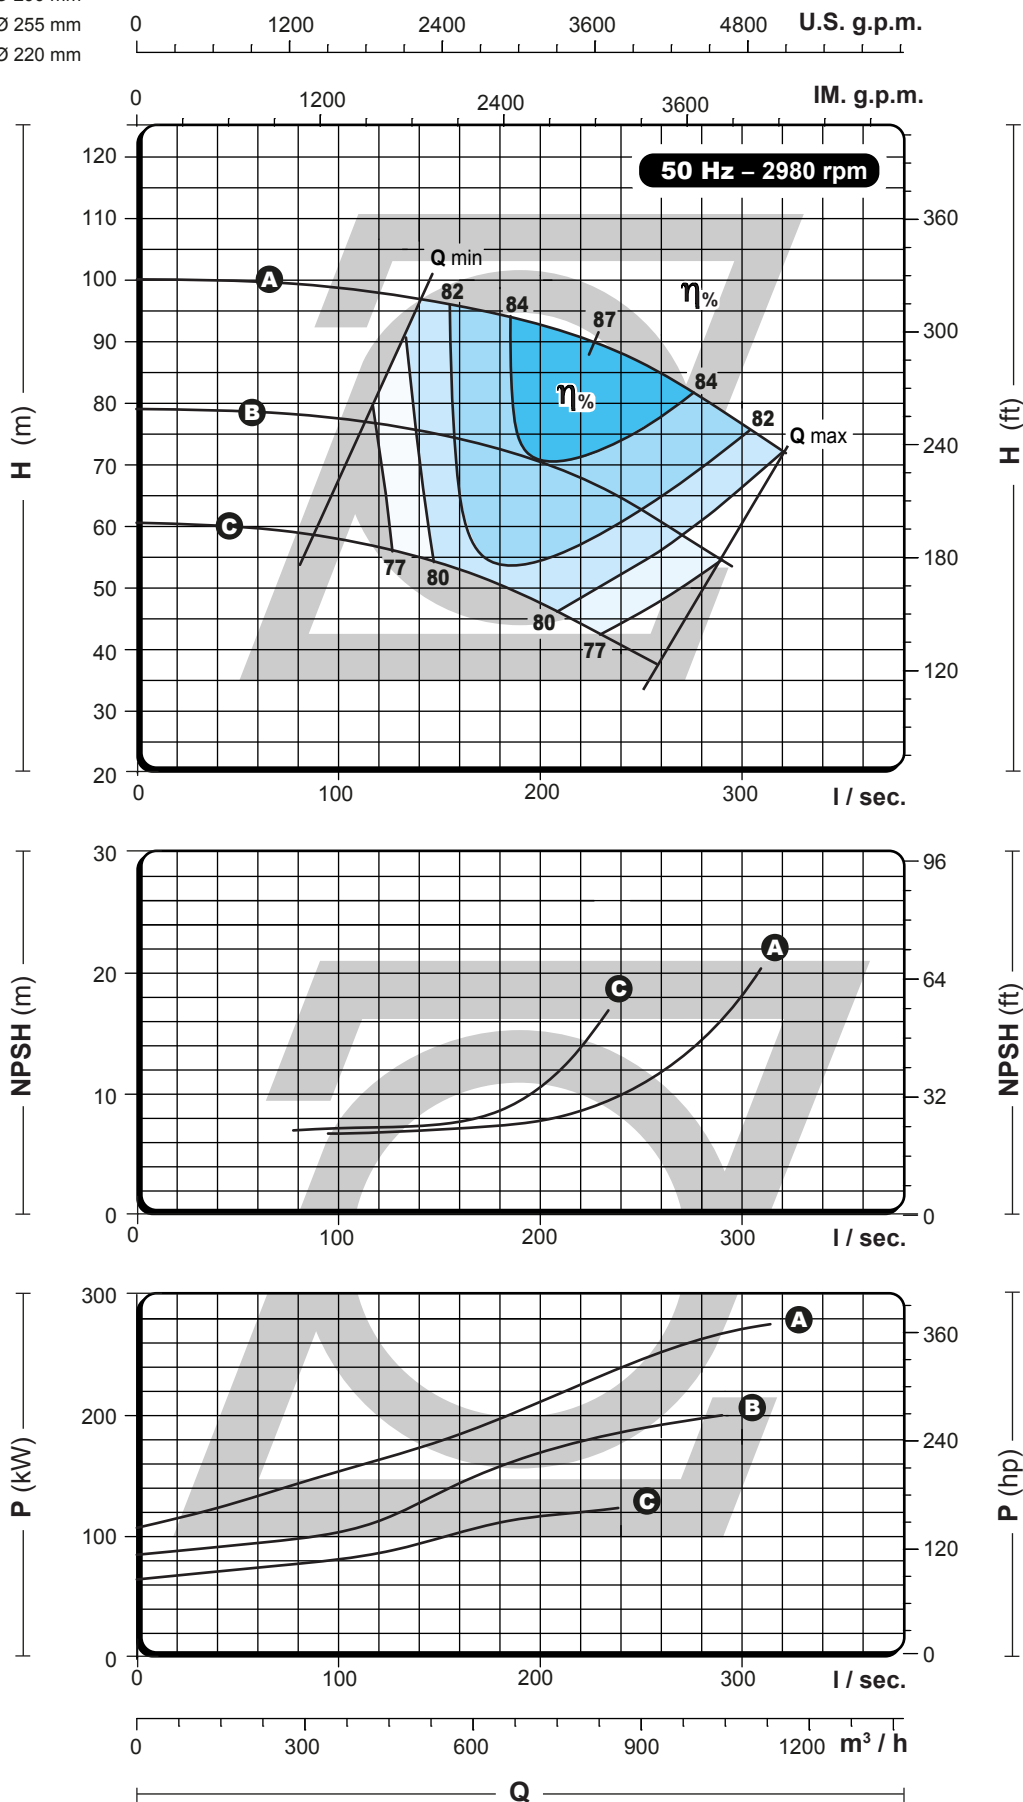

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




125-80-210

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER

- A** = Ø 216 mm
- B** = Ø 200 mm
- C** = Ø 184 mm
- D** = Ø 170 mm

0 100 200 300 400 500 U.S. g.p.m.

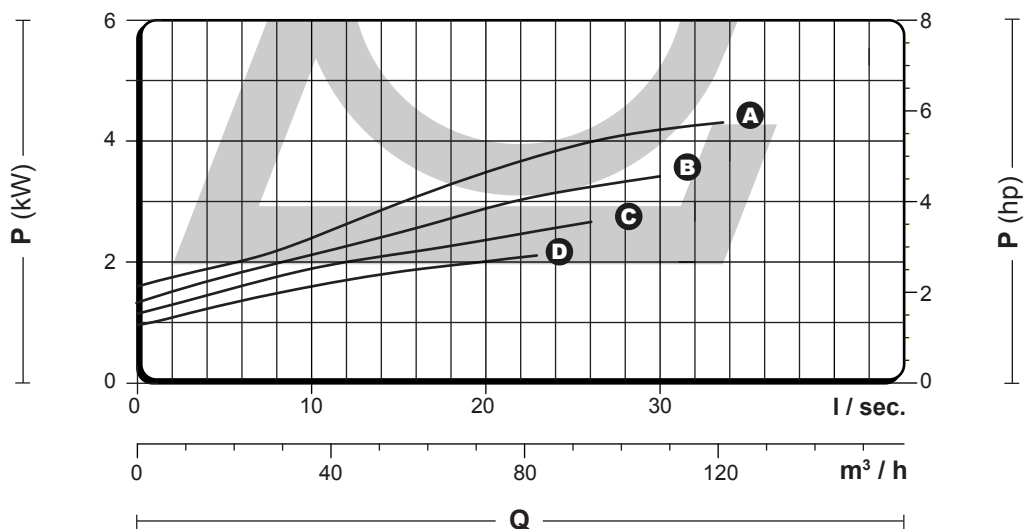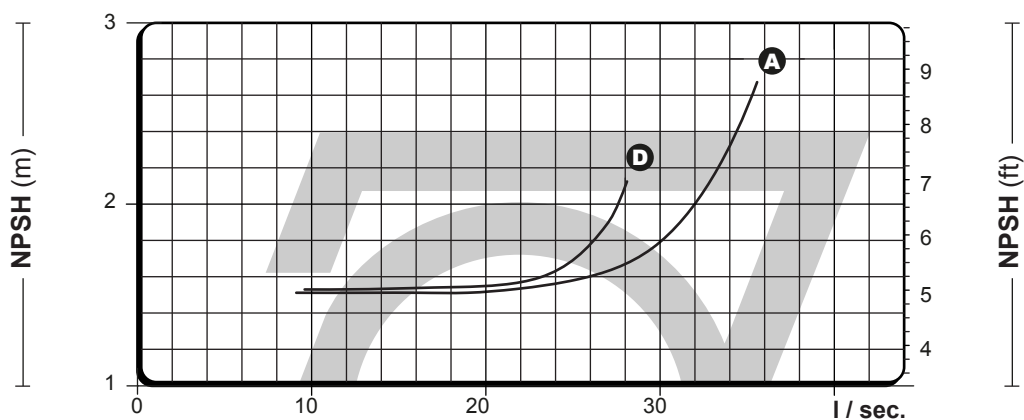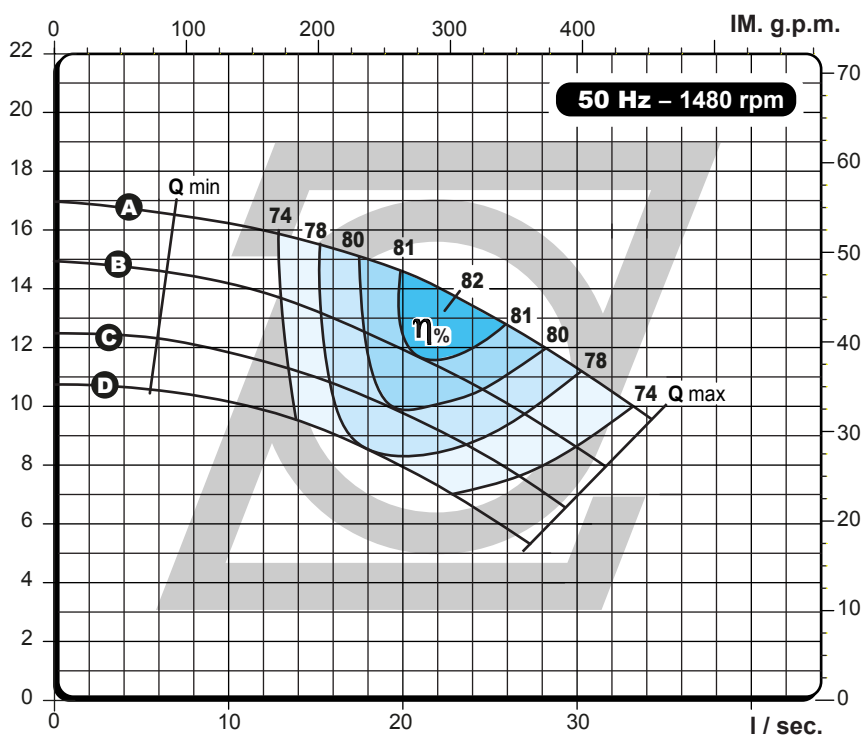

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

125-80-270

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 270 mm
 - B** = Ø 254 mm
 - C** = Ø 234 mm
 - D** = Ø 215 mm

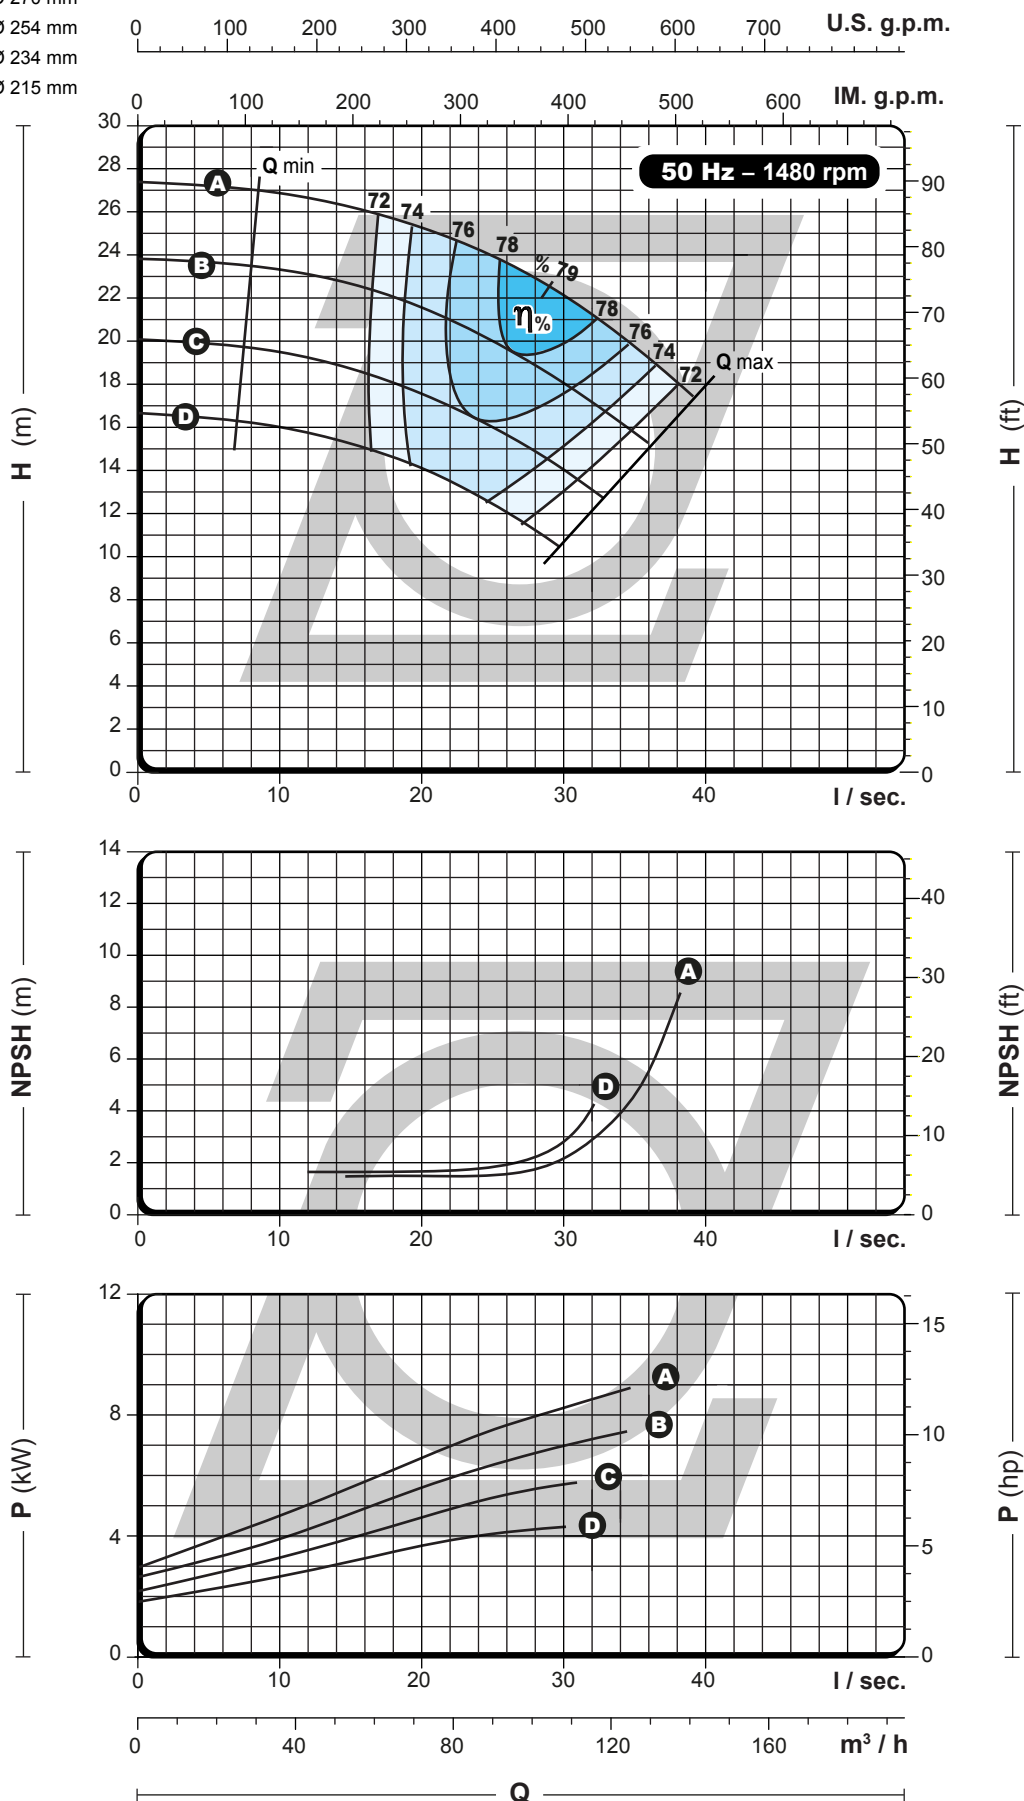

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®


PERFORMANCE
CURVES

125-80-350

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER —
A = Ø 345 mm
B = Ø 310 mm
C = Ø 270 mm

0 100 200 300 400 500 600 700 U.S. g.p.m.

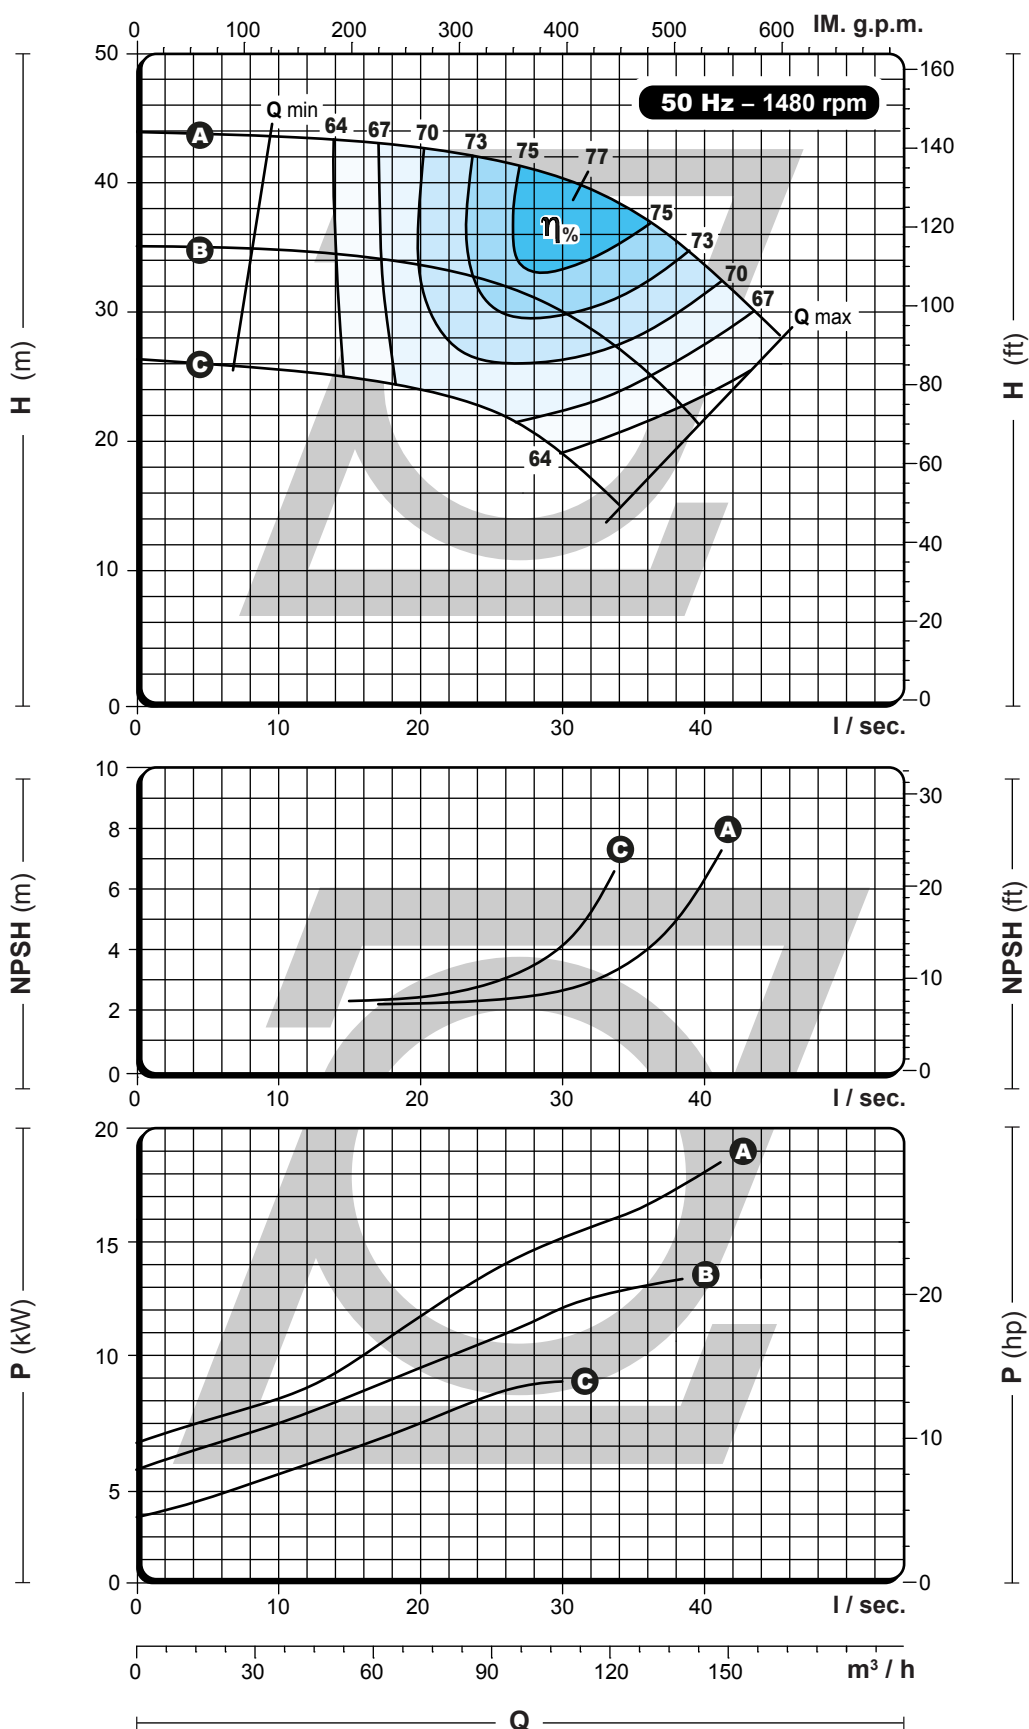

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

150-100-250

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 254 mm
B = Ø 230 mm
C = Ø 200 mm

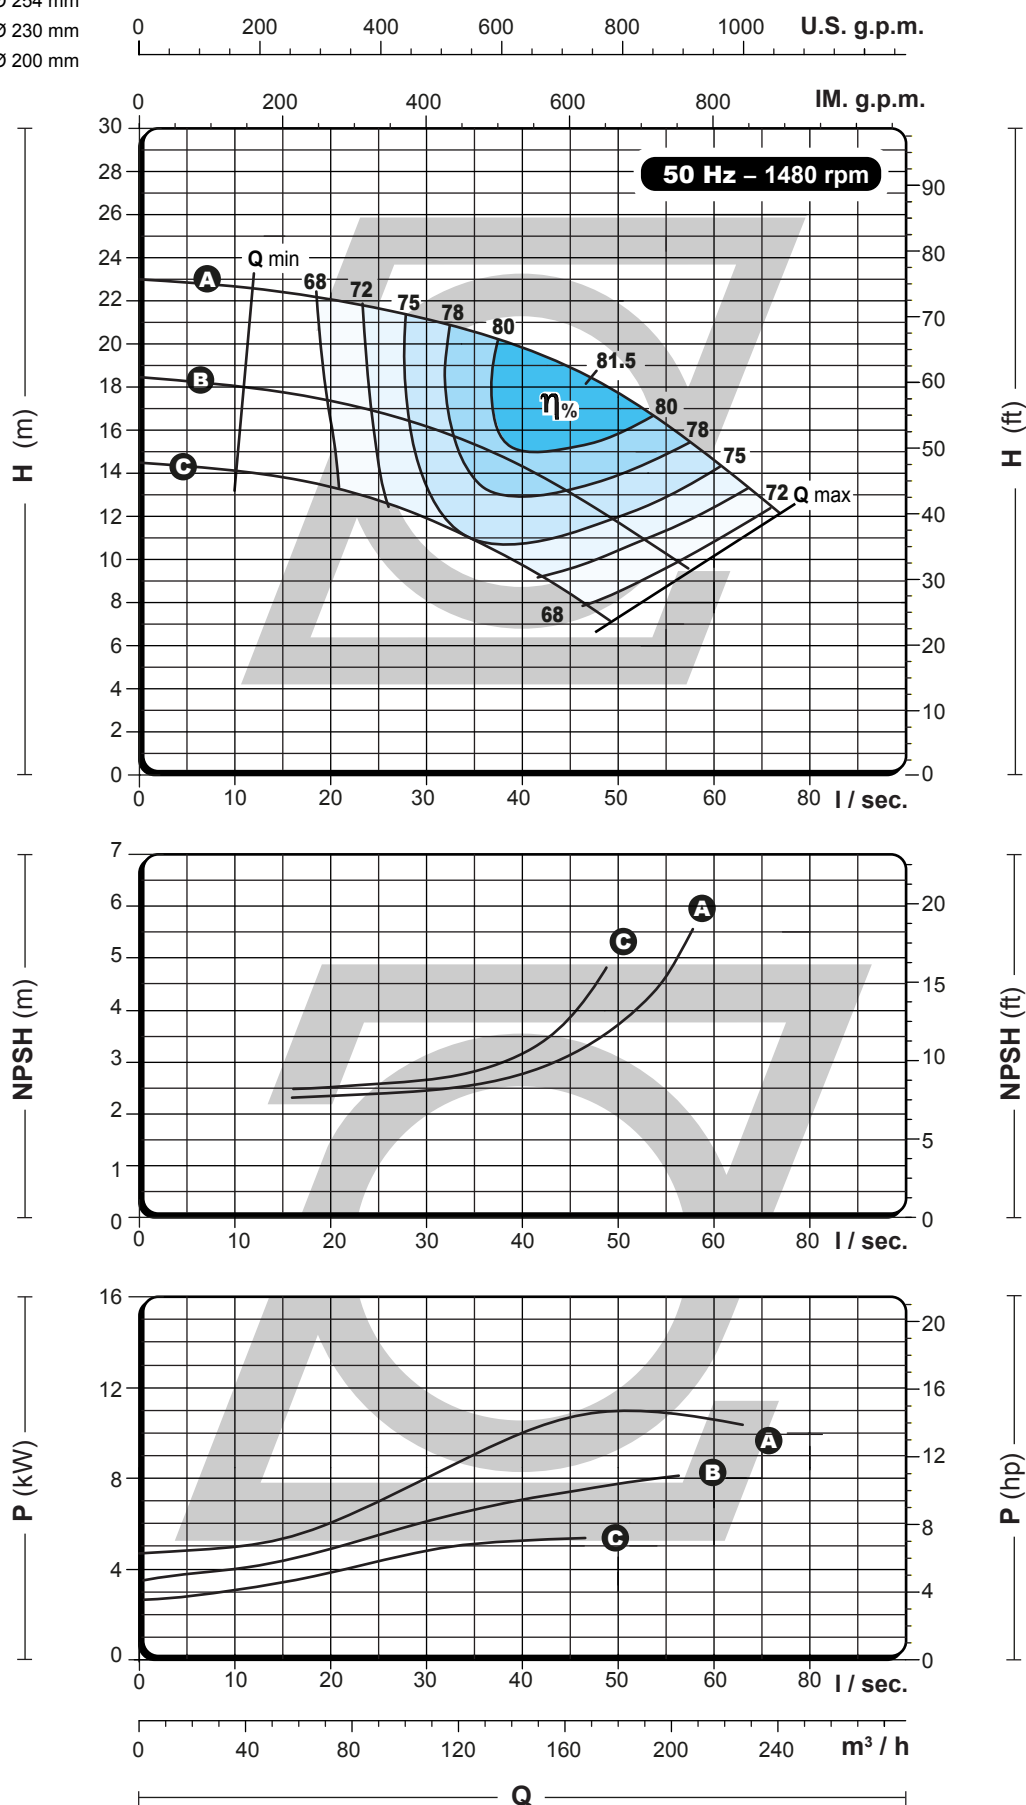

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




150-100-320

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 325 mm
 - B** = Ø 300 mm
 - C** = Ø 278 mm
 - D** = Ø 254 mm

0 200 400 600 800 1000 U.S. g.p.m.

0 200 400 600 800 IM. g.p.m.

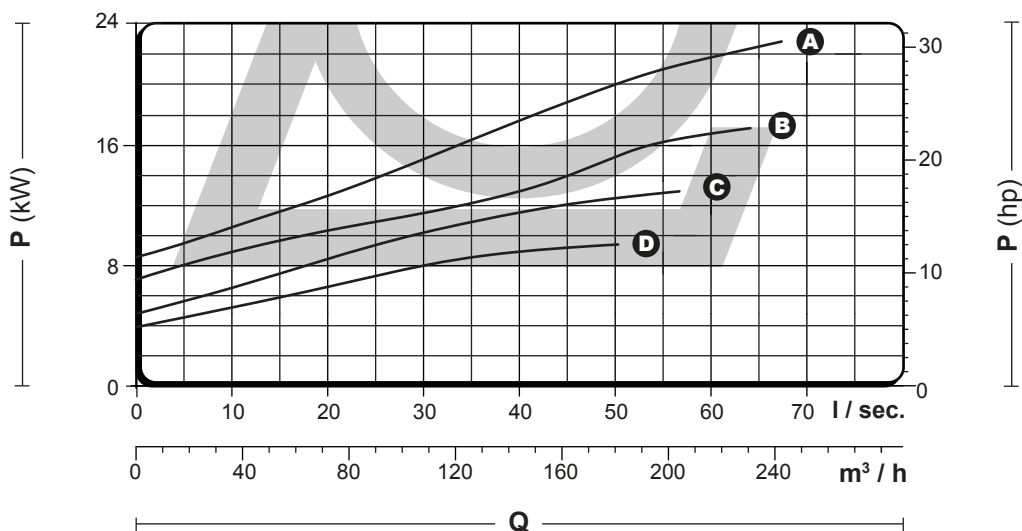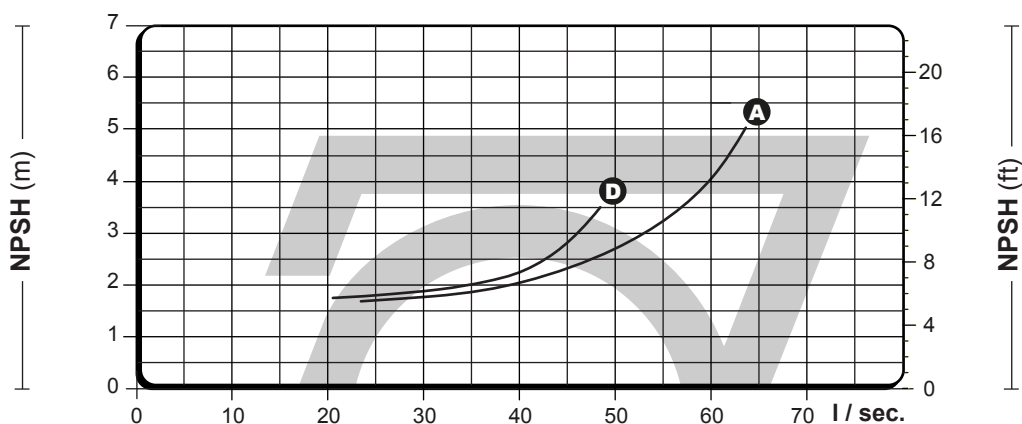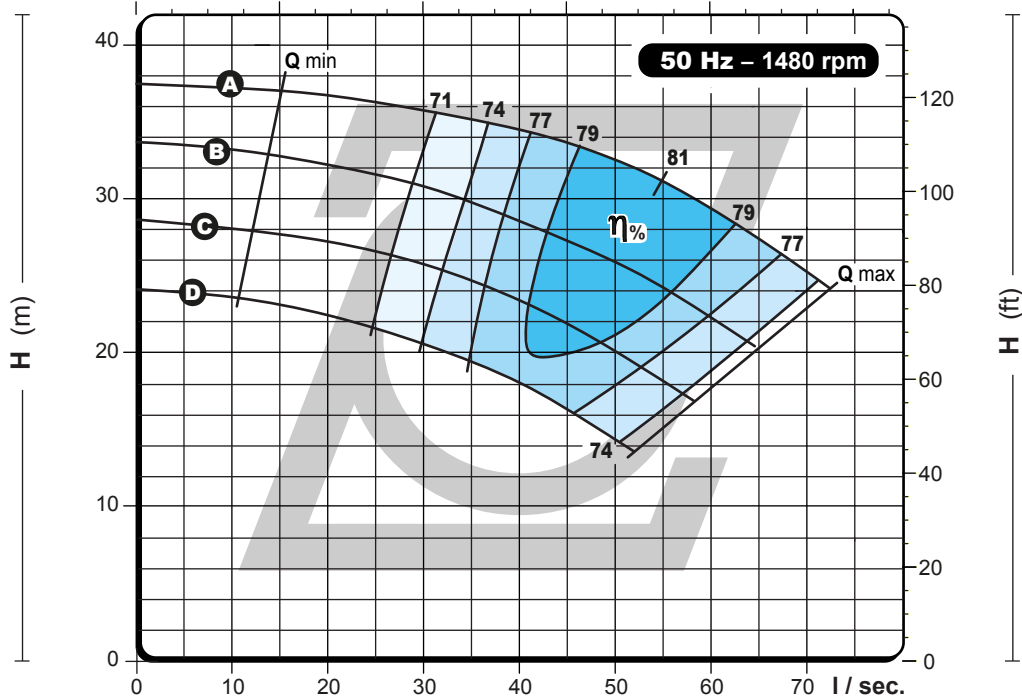

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

150-100-400

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 423 mm
 - B** = Ø 388 mm
 - C** = Ø 355 mm
 - D** = Ø 325 mm

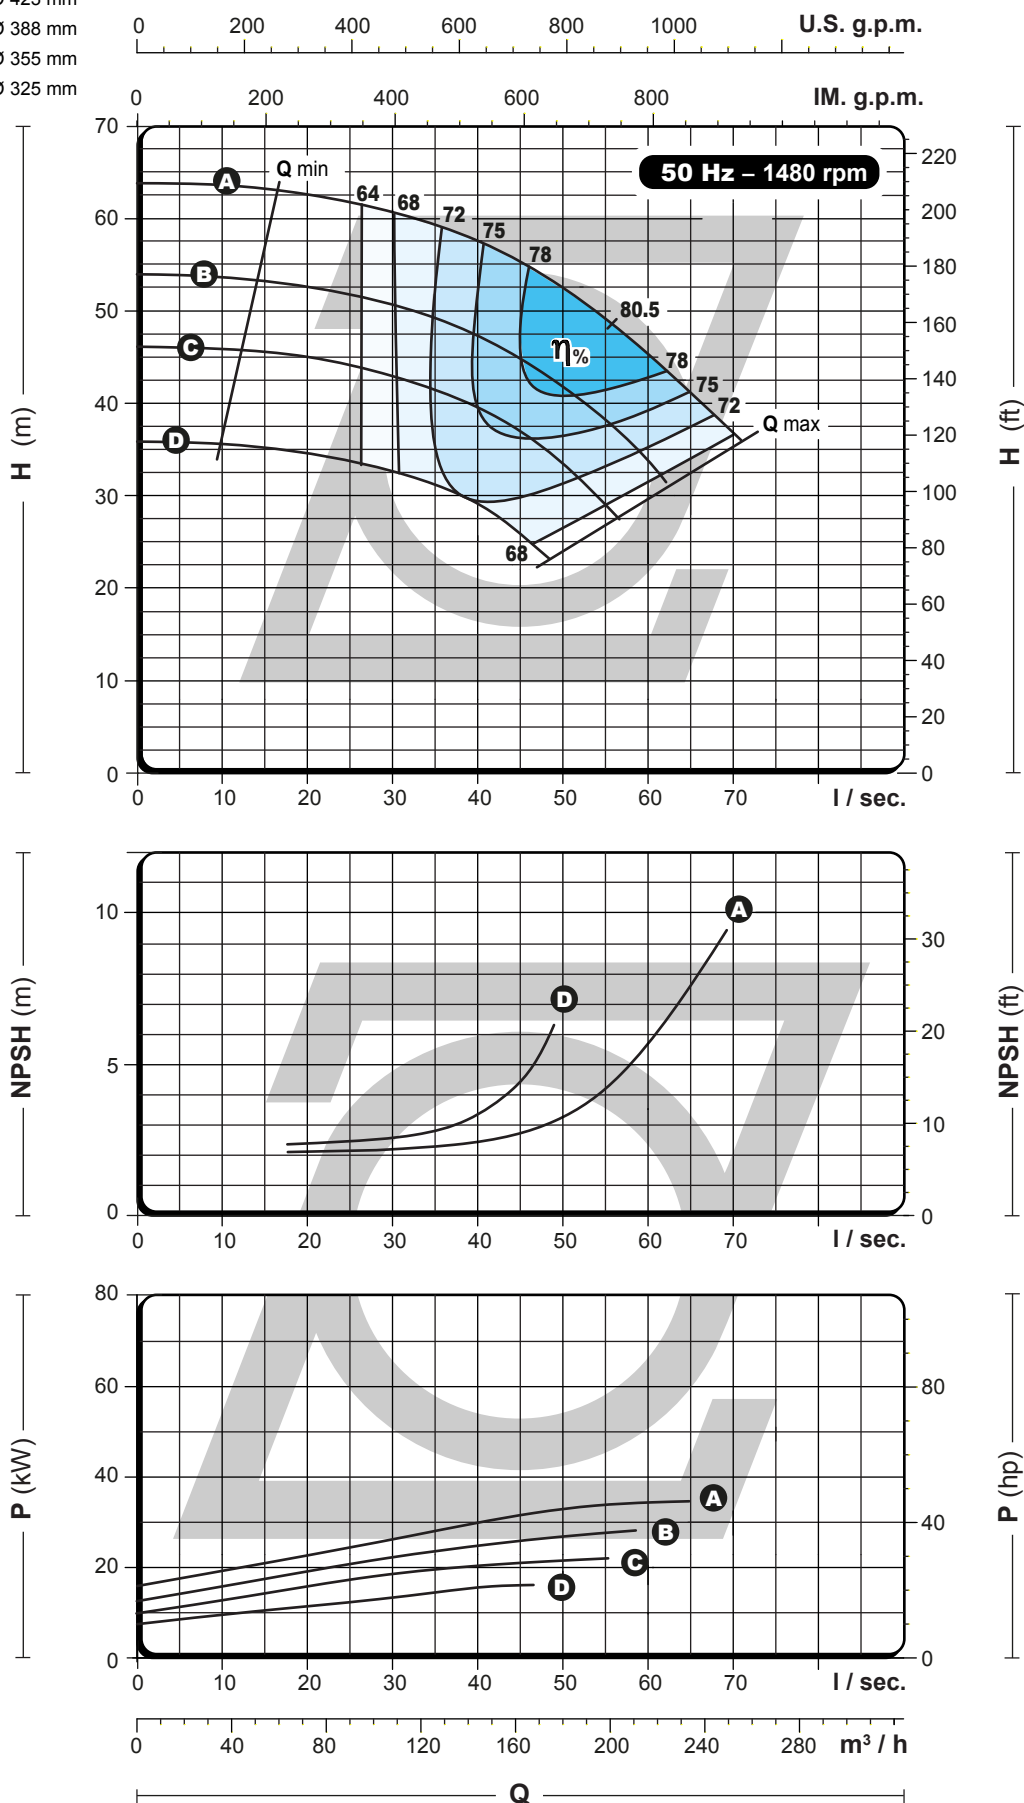

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




200-125-240

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER
A = Ø 250 mm
B = Ø 230 mm
C = Ø 210 mm
D = Ø 190 mm

0 200 400 600 800 1000 1200 1400 1600 U.S. g.p.m.

0 200 400 600 800 1000 1200 1400 IM. g.p.m.

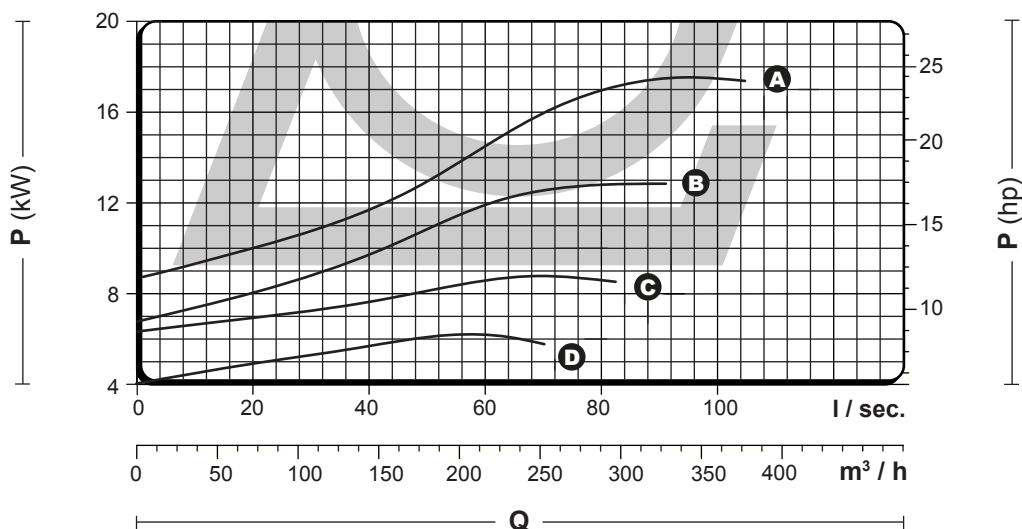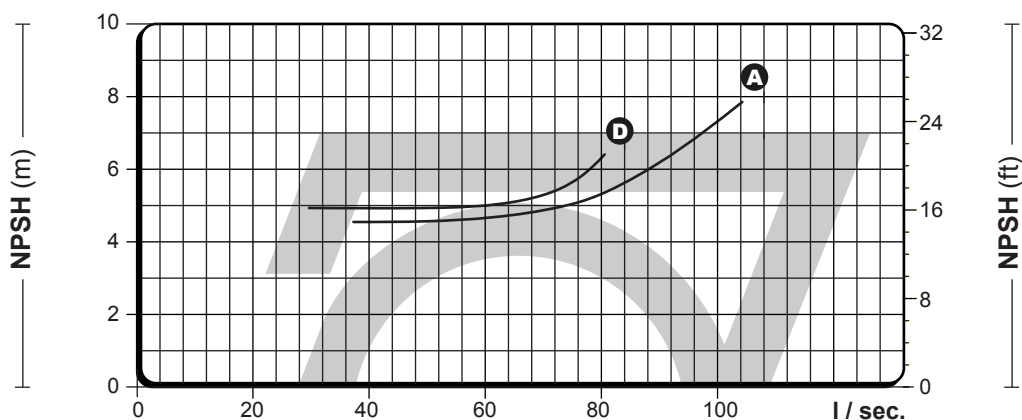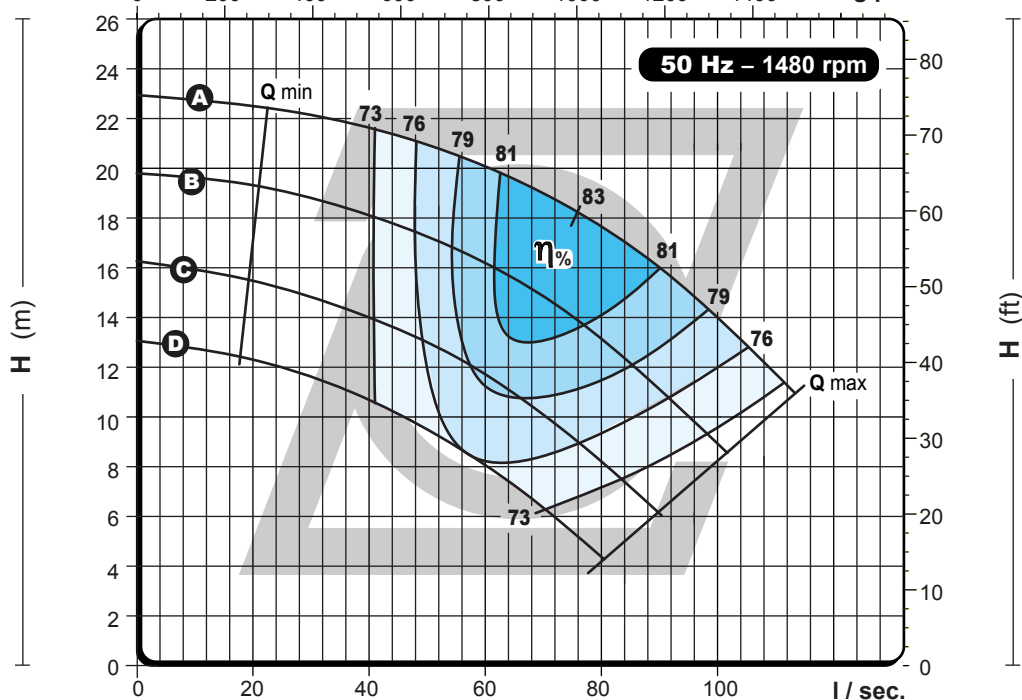

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




200-125-300

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 301 mm
B = Ø 260 mm
C = Ø 232 mm

0 200 400 600 800 1000 1200 1400 1600 U.S. g.p.m.

0 200 400 600 800 1000 1200 1400 IM. g.p.m.

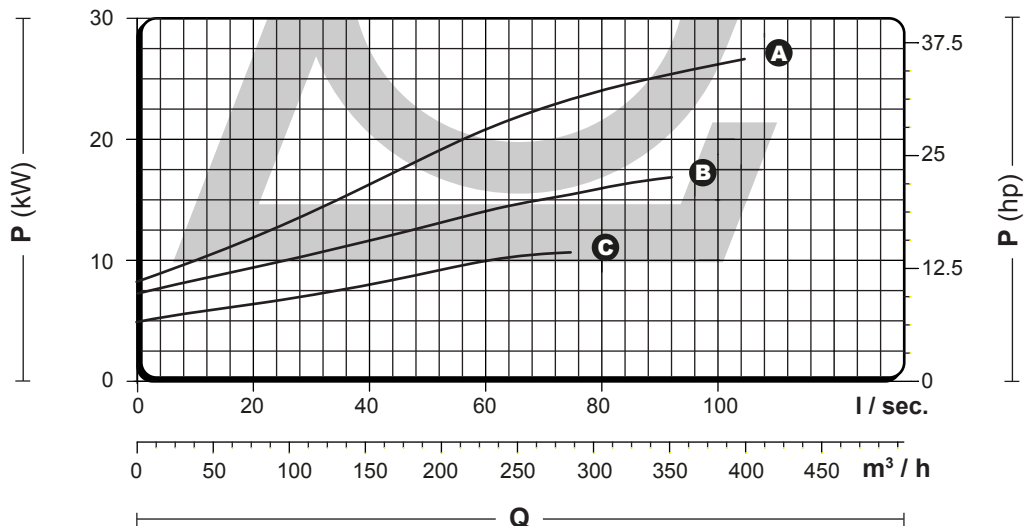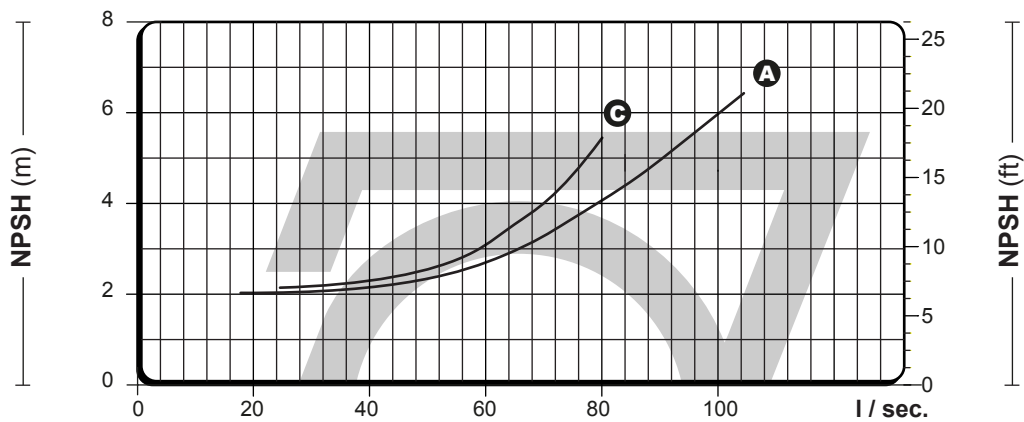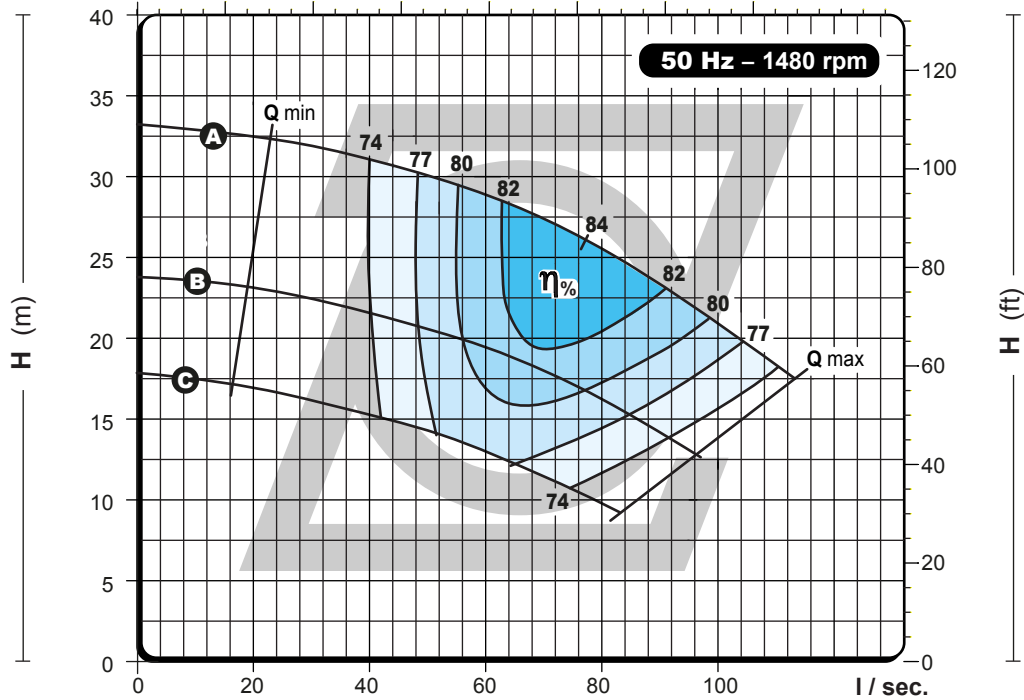

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




200-125-380

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 395 mm
 - B = Ø 365 mm
 - C = Ø 330 mm
 - D = Ø 295 mm

0 500 1000 1500 2000 U.S. g.p.m.

0 500 1000 1500 IM. g.p.m.

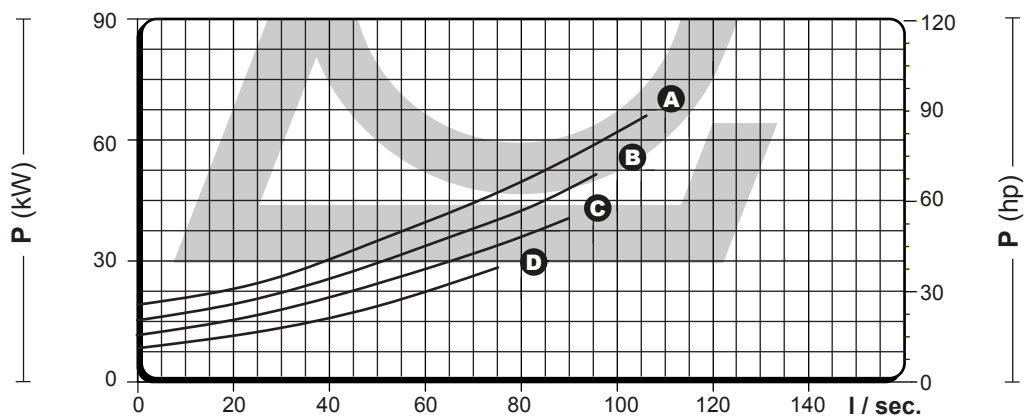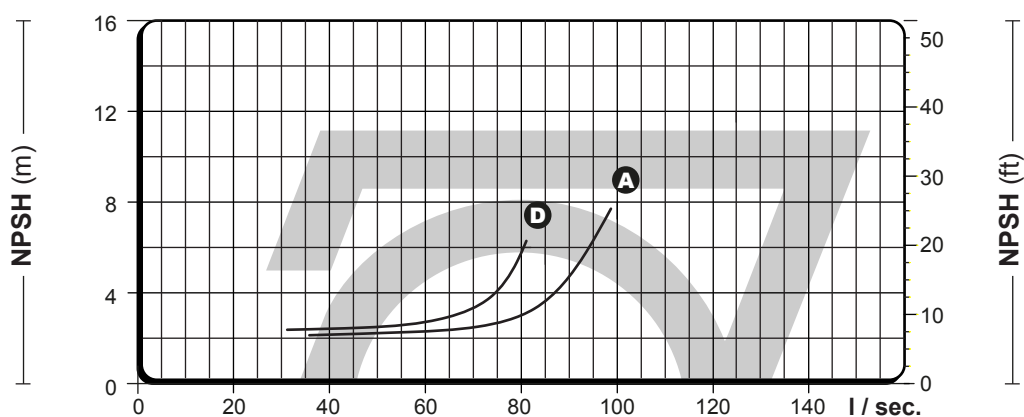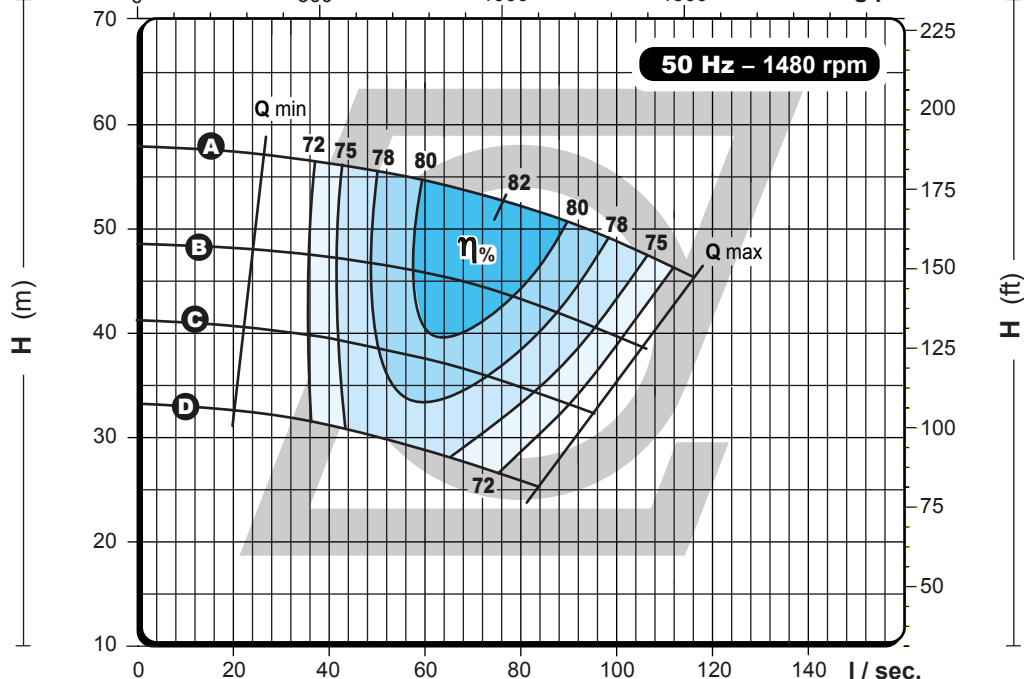

0 50 100 150 200 250 300 350 400 450 500 m³ / h

Q

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

200-125-480

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 491 mm
 - B** = Ø 445 mm
 - C** = Ø 415 mm
 - D** = Ø 380 mm

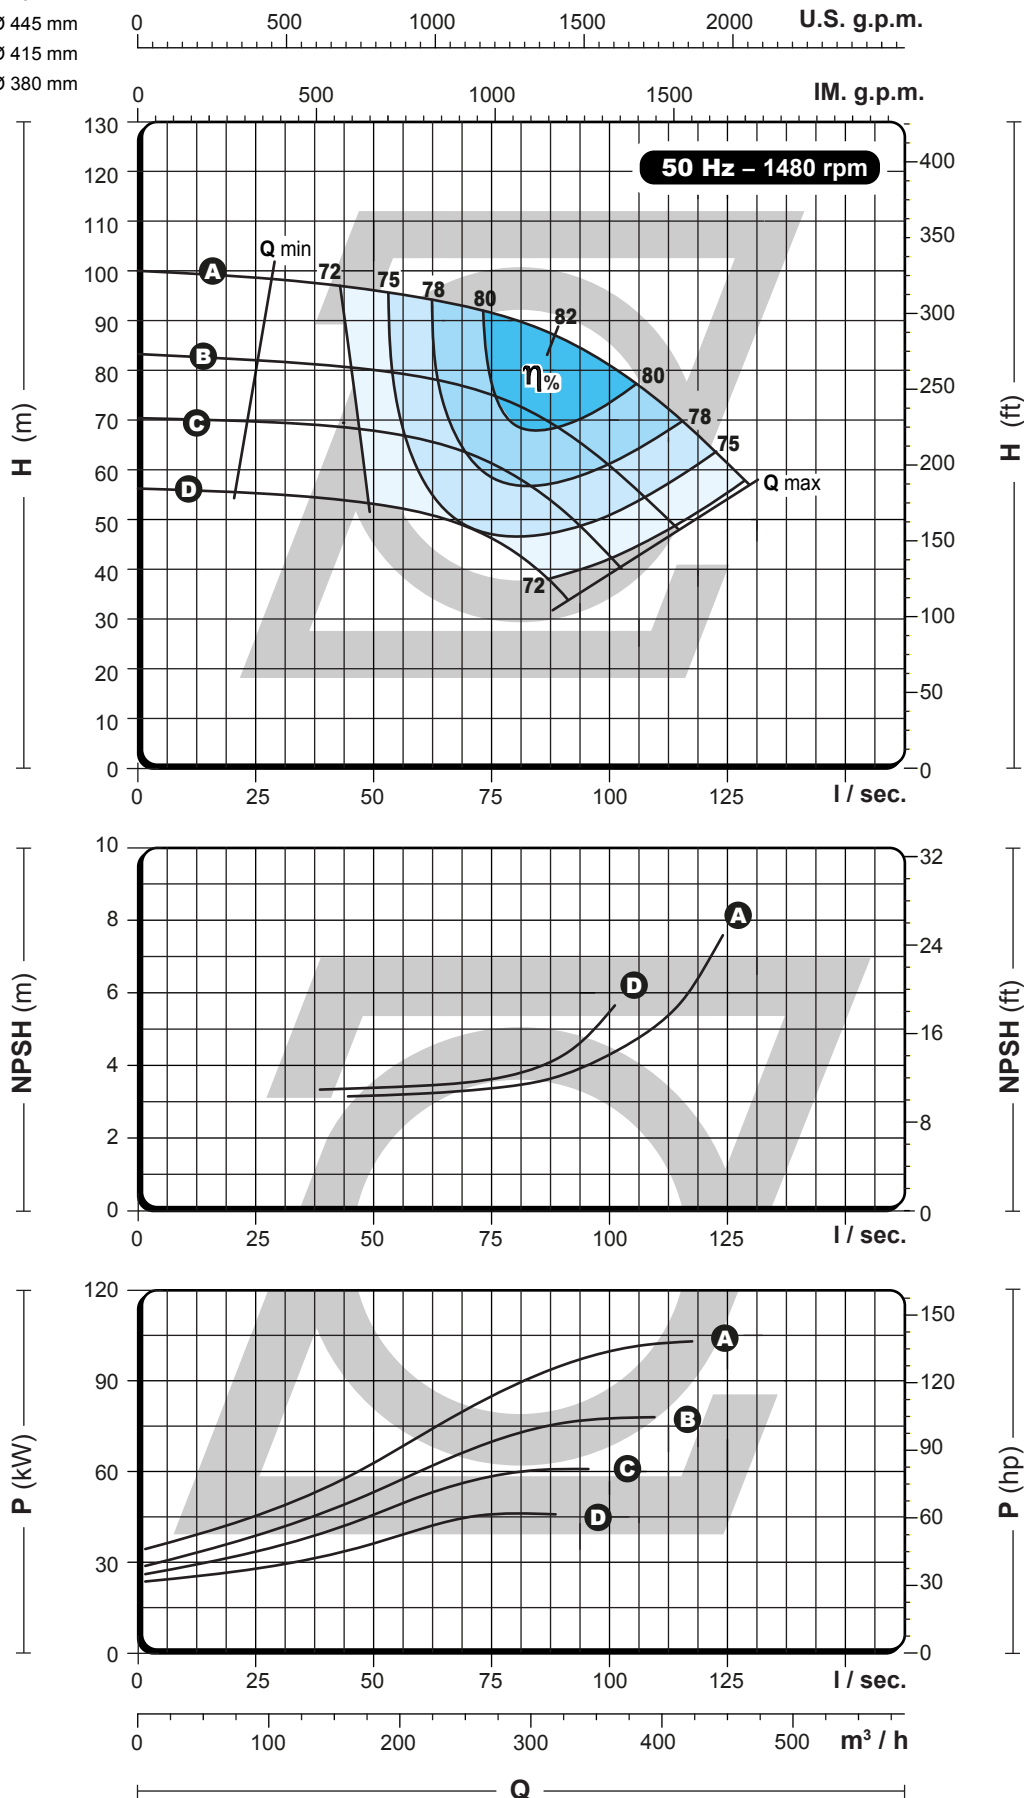

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




200-150-290

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER
A = Ø 290 mm
B = Ø 255 mm
C = Ø 220 mm

0 400 800 1200 1600 2000 2400 U.S. g.p.m.

0 500 1000 1500 2000 IM. g.p.m.

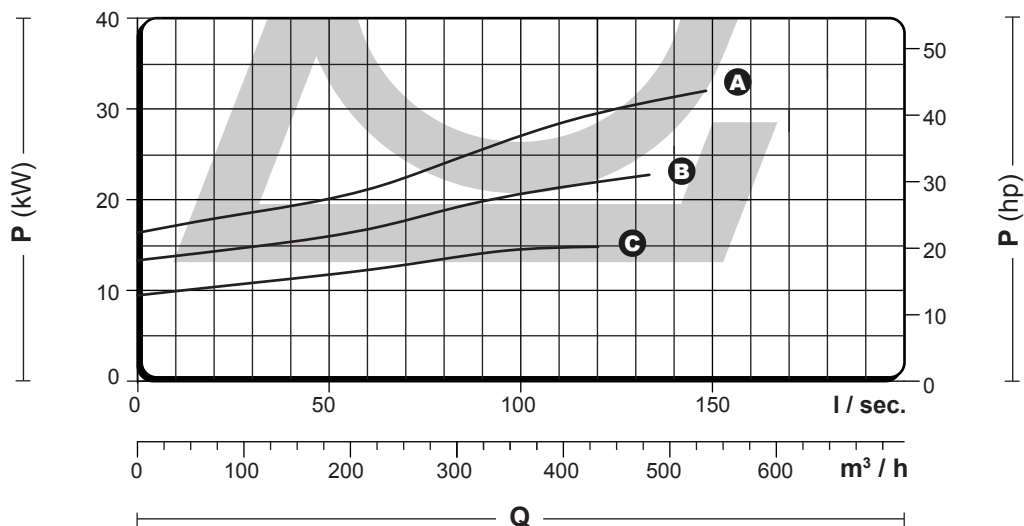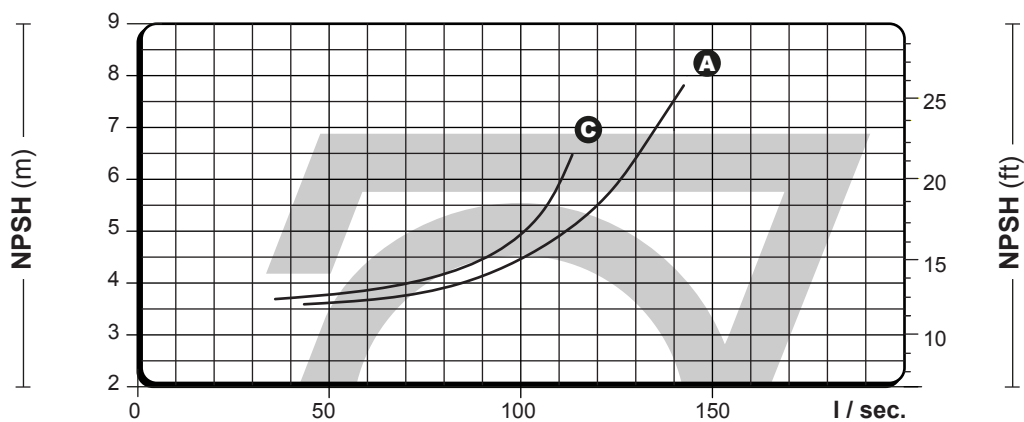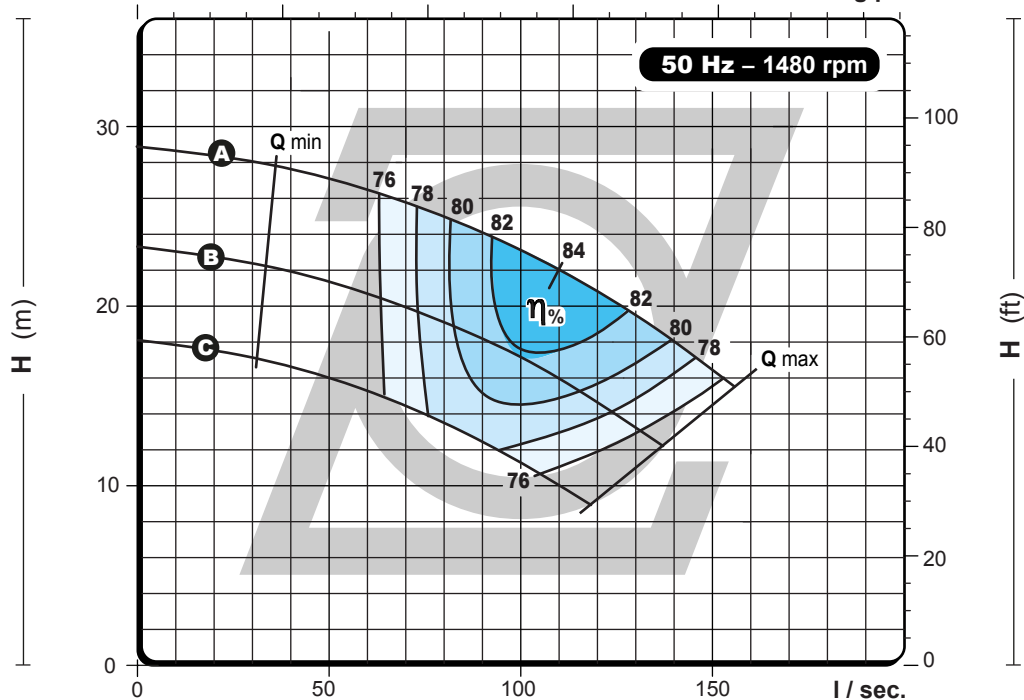

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

200-150-360

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 370 mm
 - B** = Ø 345 mm
 - C** = Ø 320 mm
 - D** = Ø 285 mm

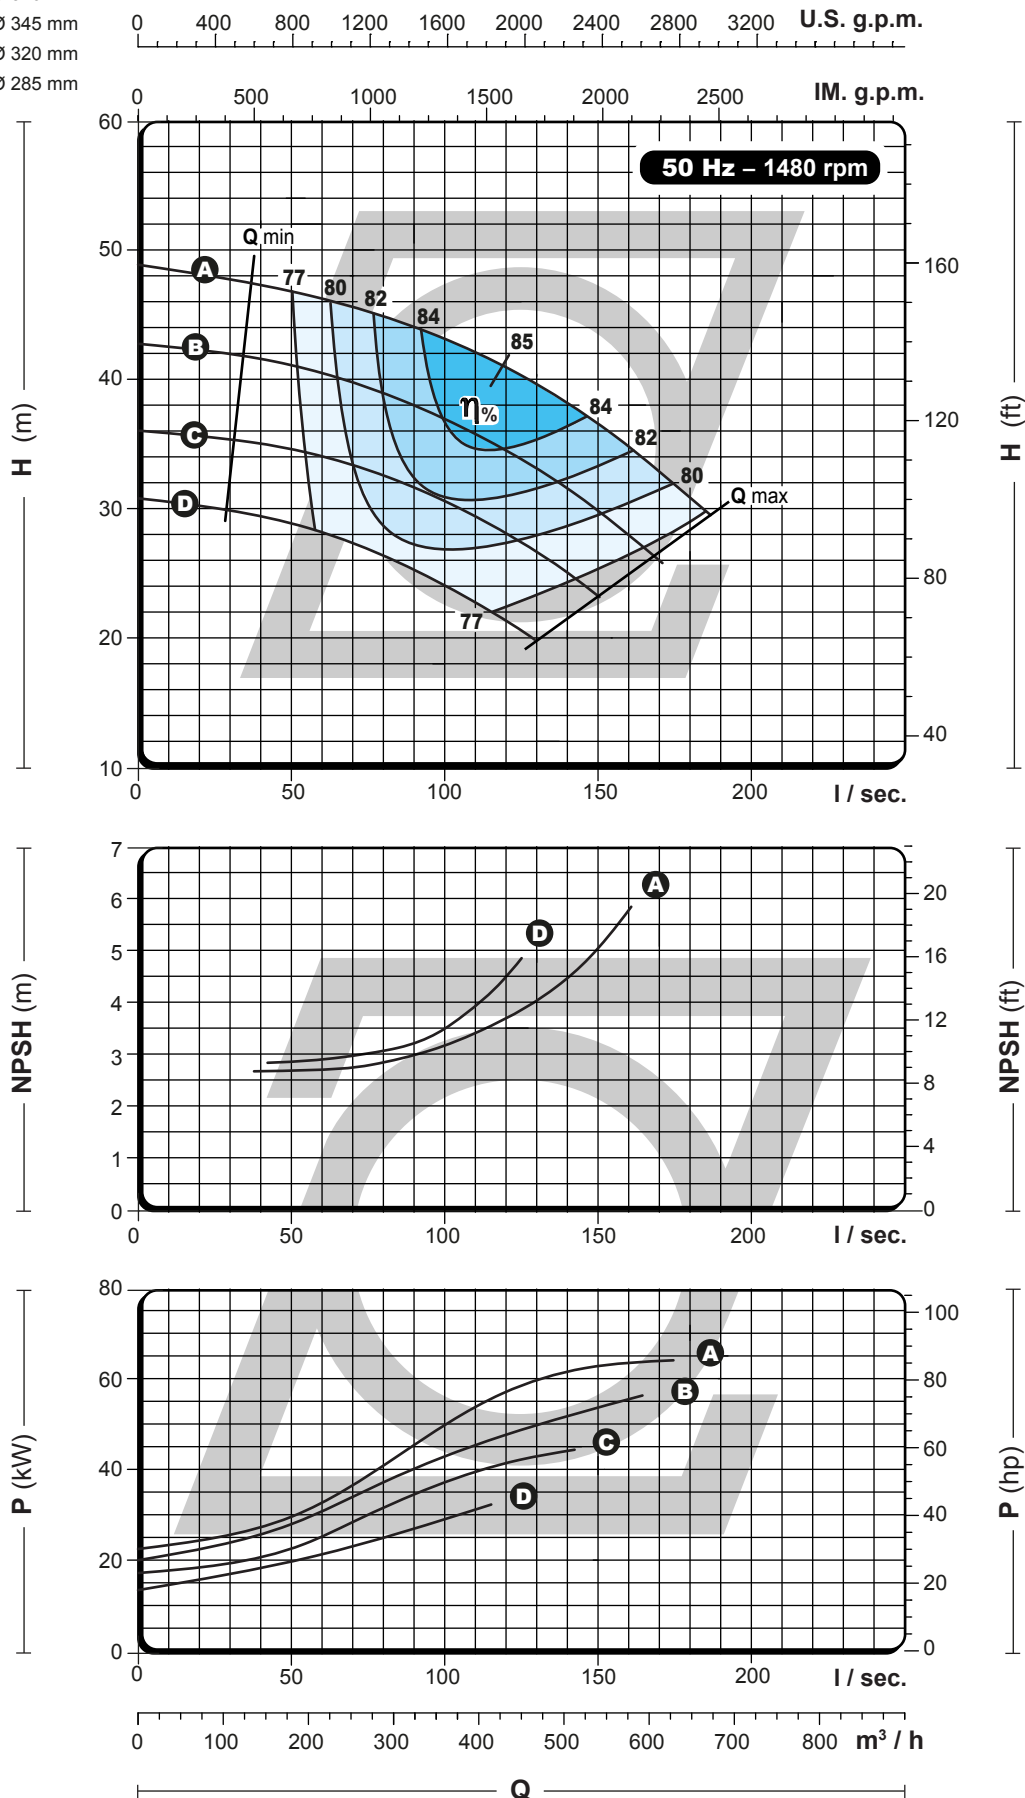

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




200-150-460

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 460 mm
 - B** = Ø 420 mm
 - C** = Ø 375 mm
 - D** = Ø 345 mm

0 400 800 1200 1600 2000 2400 2800 3200 U.S. g.p.m.

0 500 1000 1500 2000 2500 IM. g.p.m.

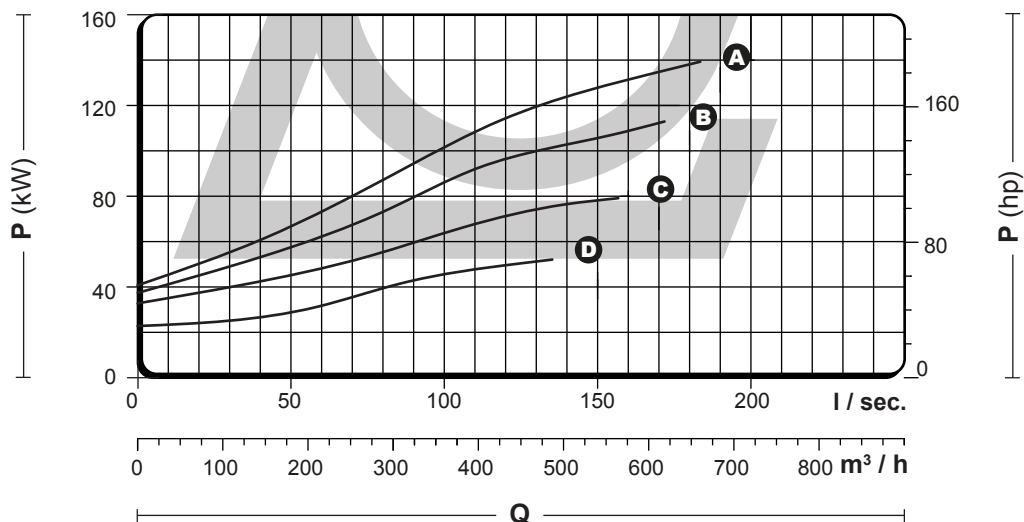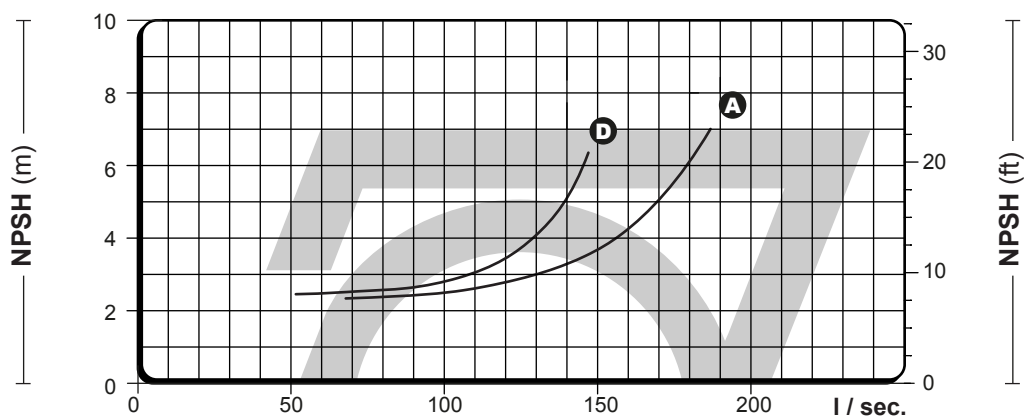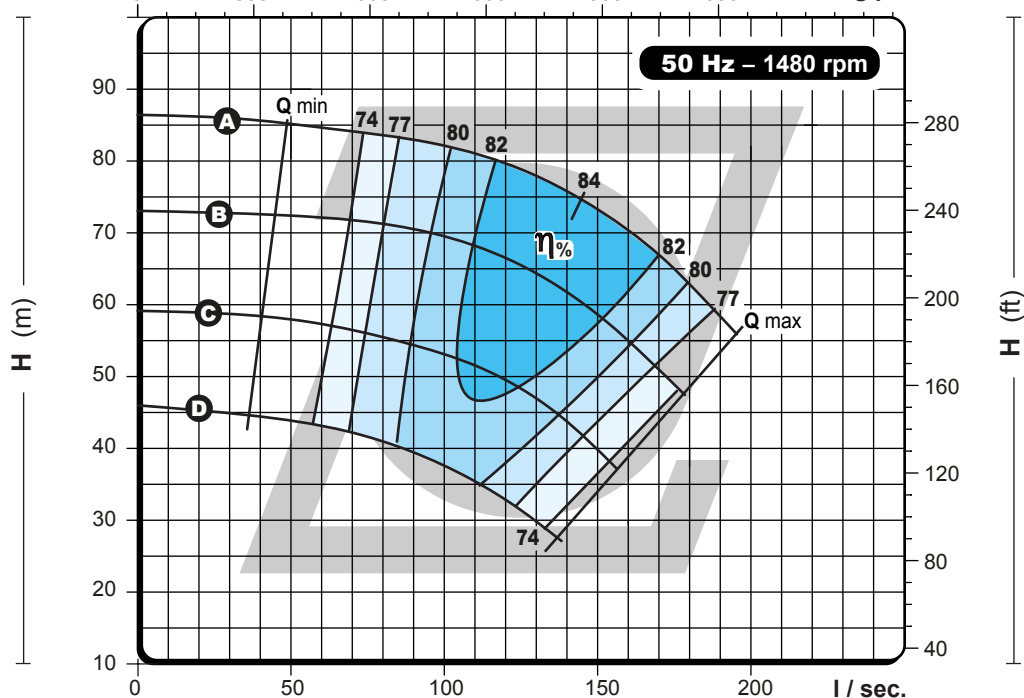

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

200-150-570

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 585 mm
 - B = Ø 525 mm
 - C = Ø 490 mm
 - D = Ø 450 mm

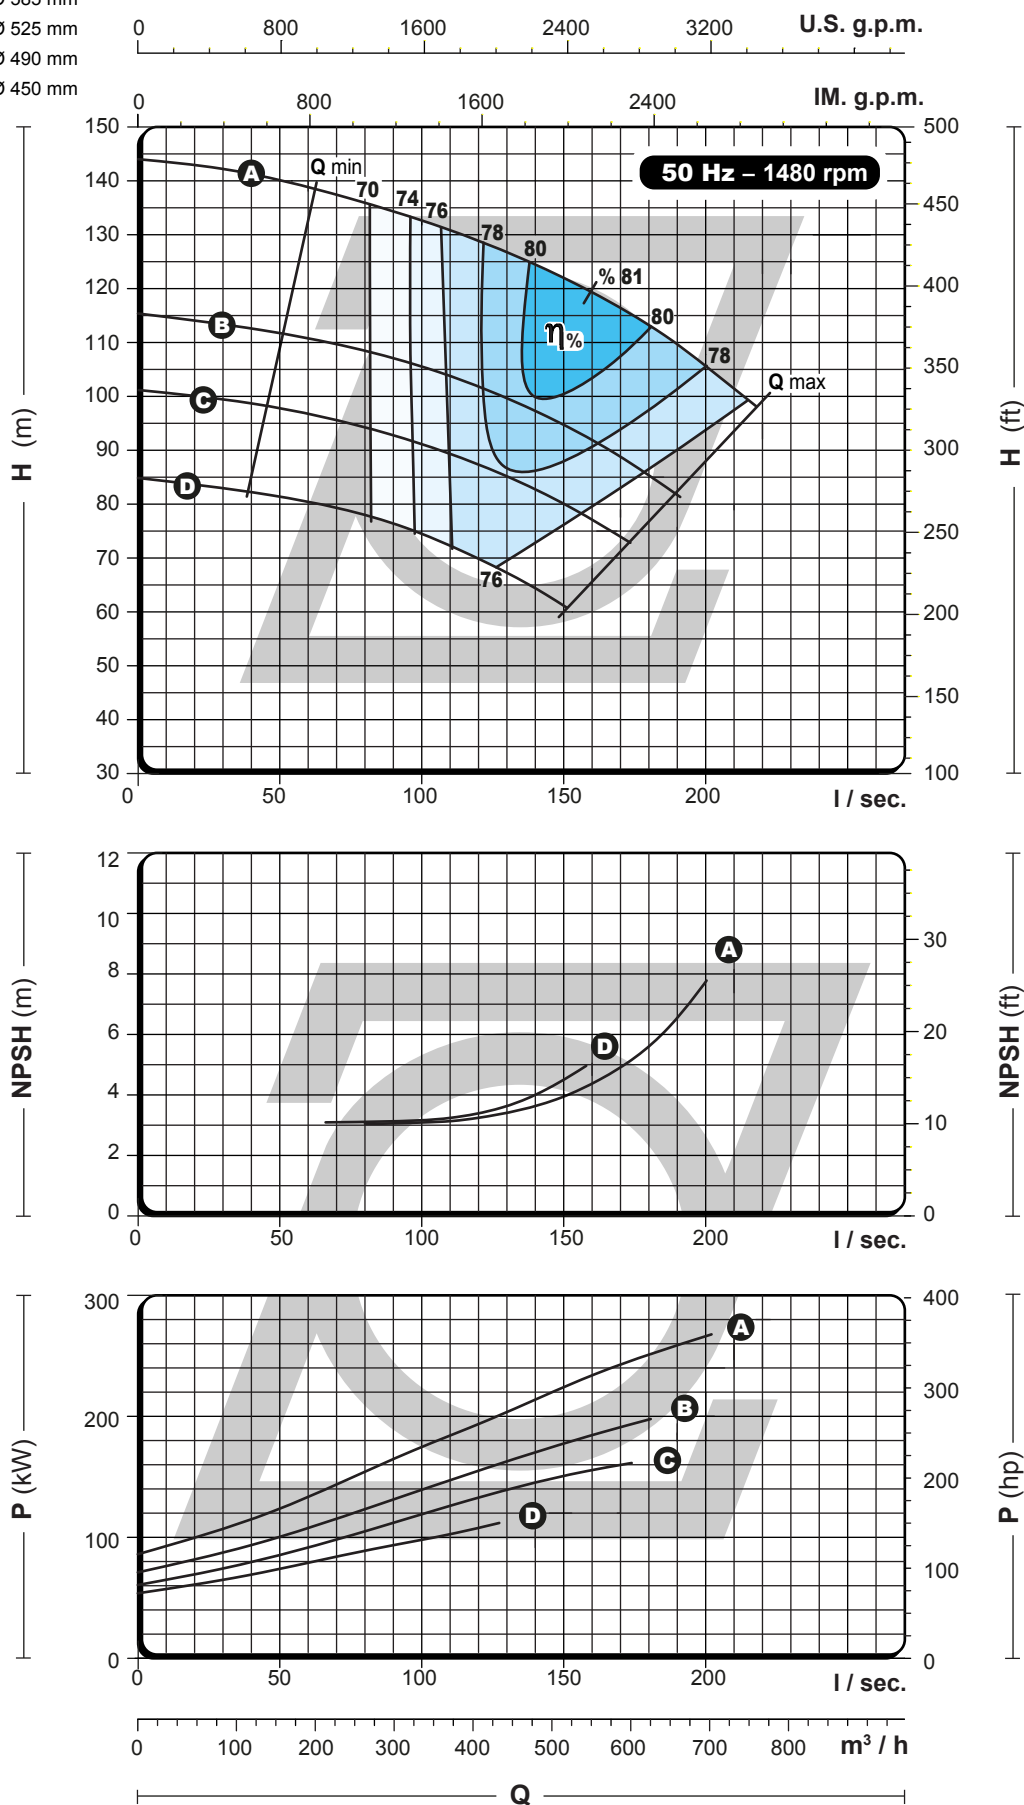

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

250-200-340

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 338 mm
 - B** = Ø 315 mm
 - C** = Ø 290 mm
 - D** = Ø 268 mm

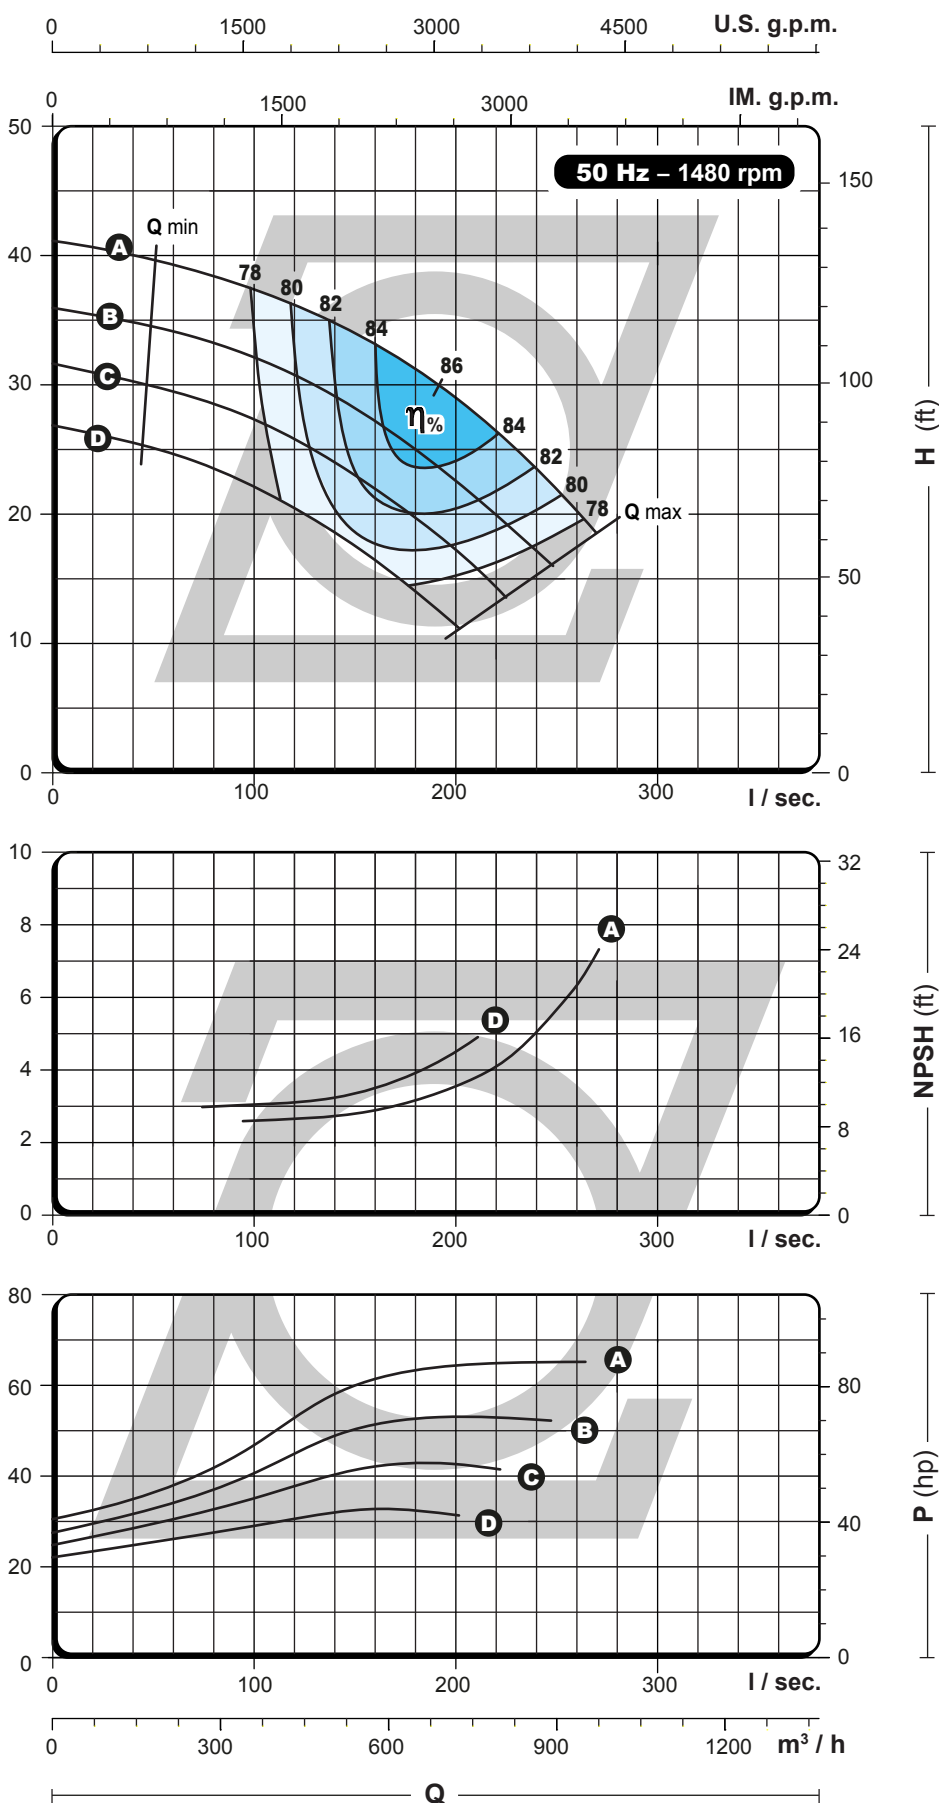

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

250-200-430

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 426 mm
 - B** = Ø 380 mm
 - C** = Ø 350 mm
 - D** = Ø 320 mm

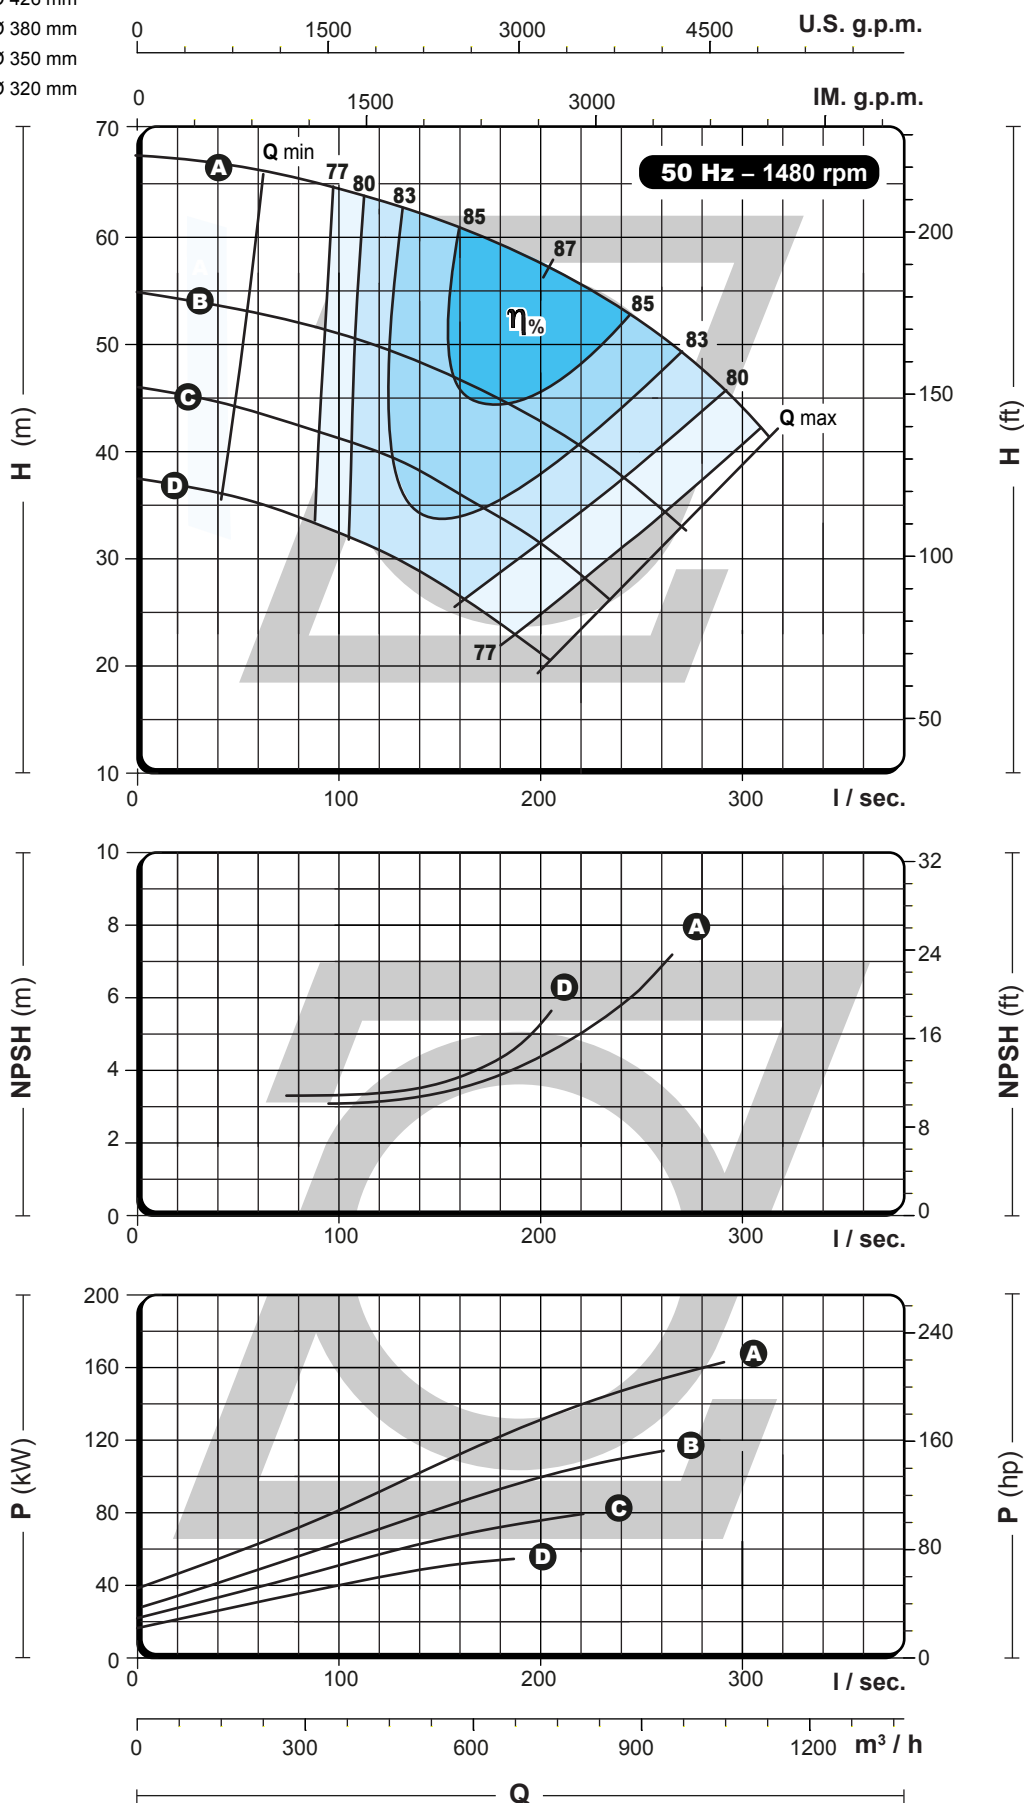

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




250-200-530

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 530 mm
 - B** = Ø 490 mm
 - C** = Ø 440 mm
 - D** = Ø 400 mm

0 1200 2400 3600 4800 U.S. g.p.m.

0 1200 2400 3600 IM. g.p.m.

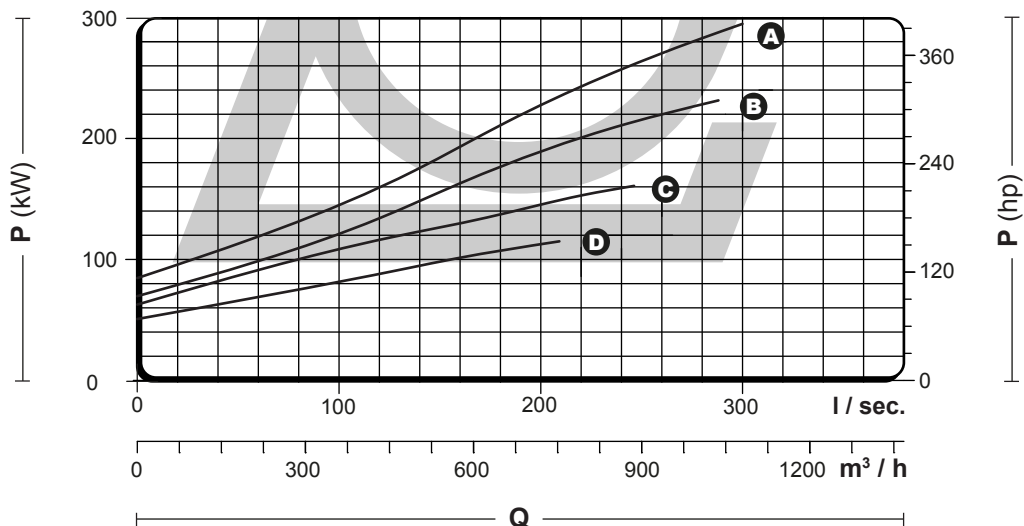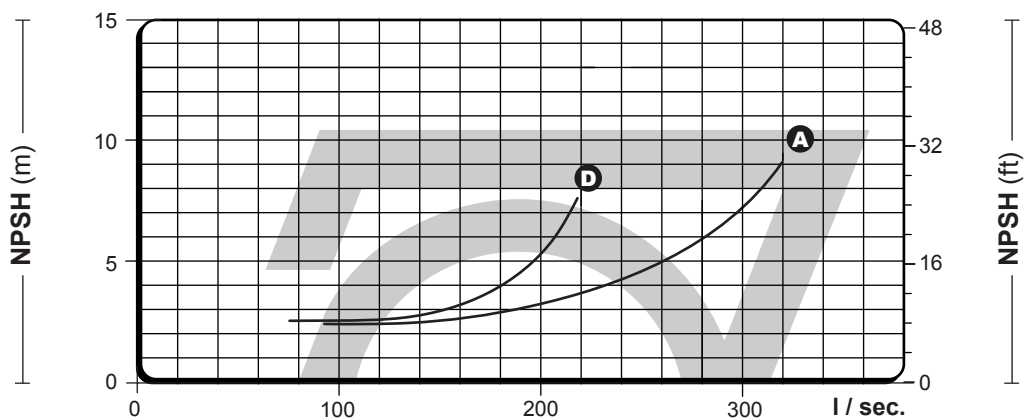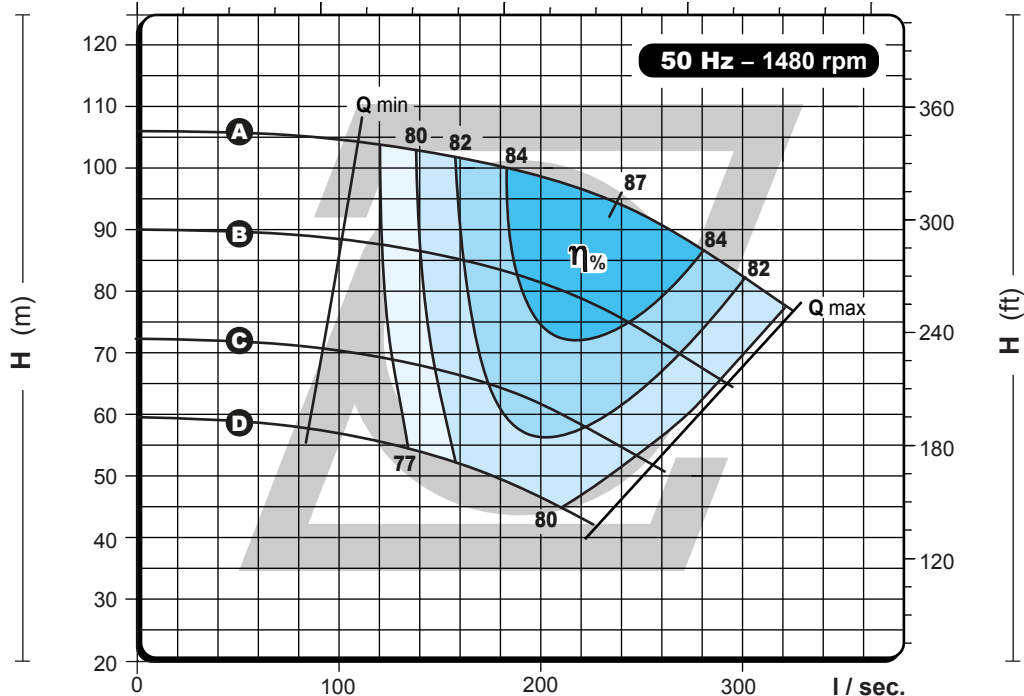

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

250-200-660

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER —
A = Ø 655 mm
B = Ø 610 mm
C = Ø 540 mm

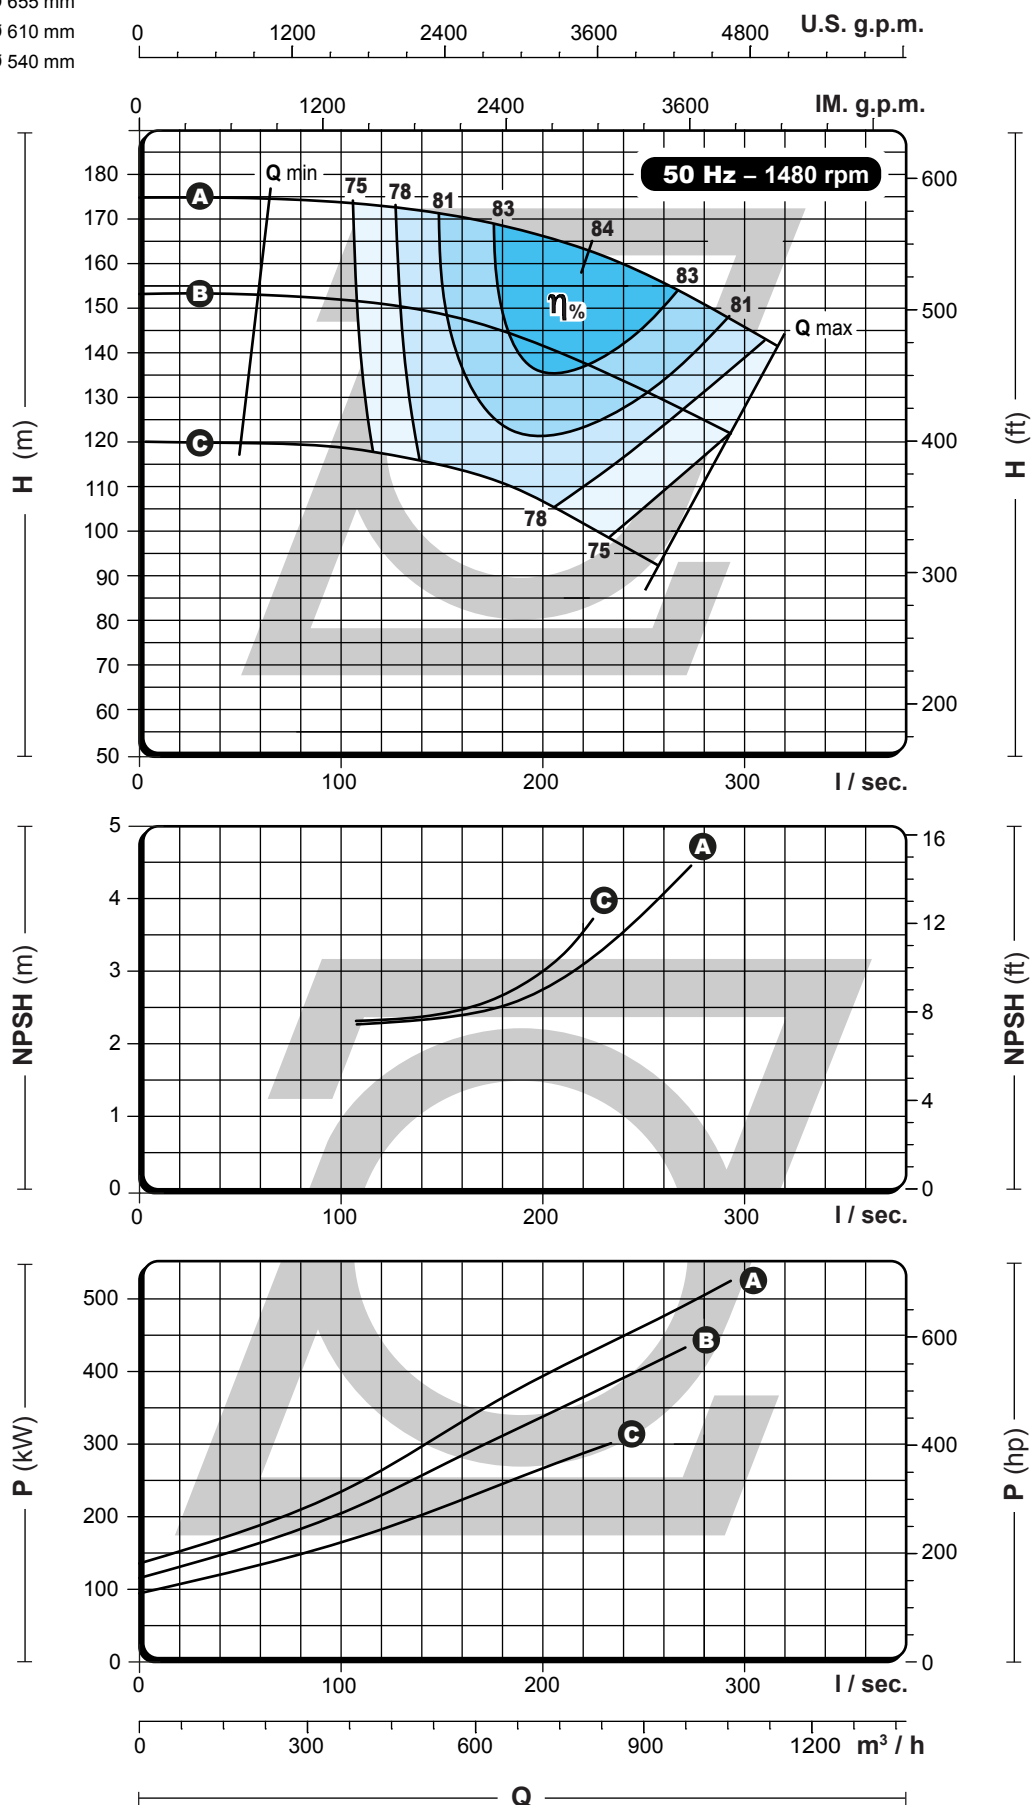

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

300-250-270

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 290 mm
B = Ø 255 mm
C = Ø 220 mm

0 1500 3000 4500 U.S. g.p.m.

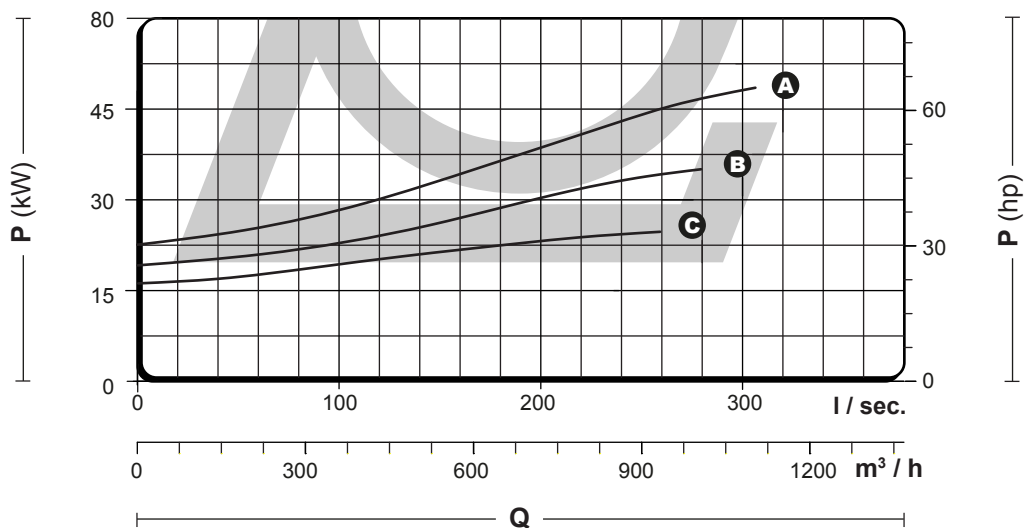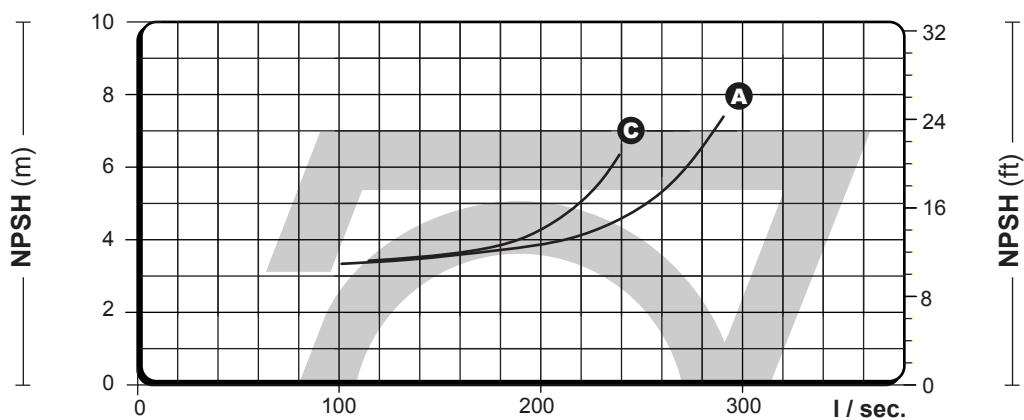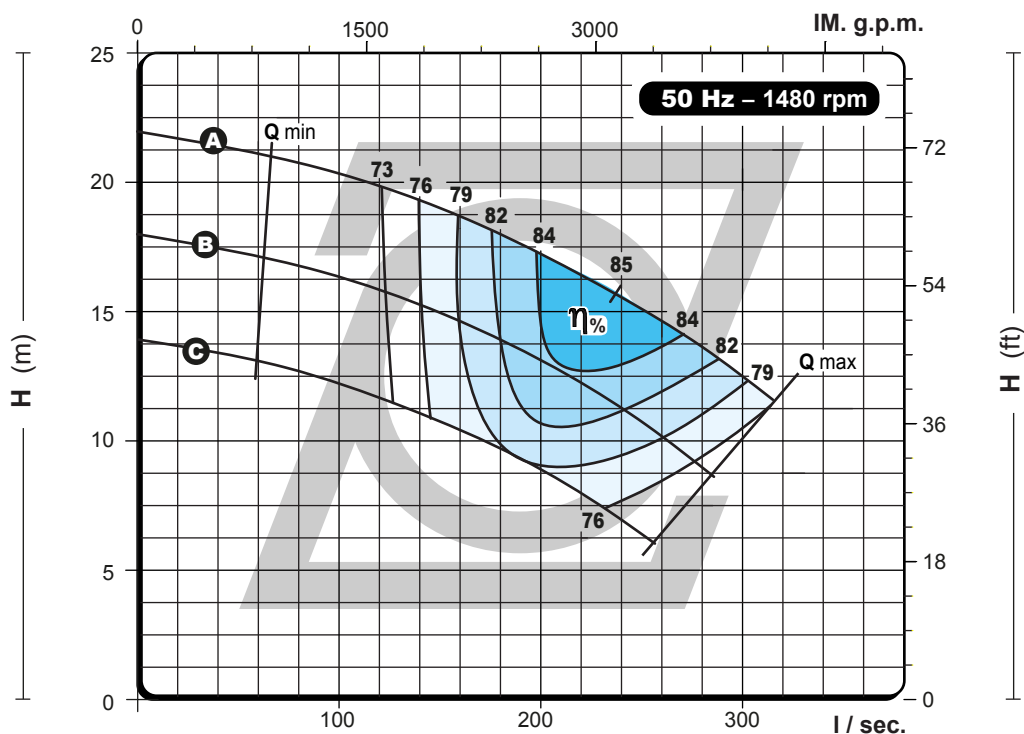

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it

single stage double suction




POMPE ZANNI®

PERFORMANCE
CURVES

300-250-280

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 321 mm
B = Ø 290 mm
C = Ø 255 mm

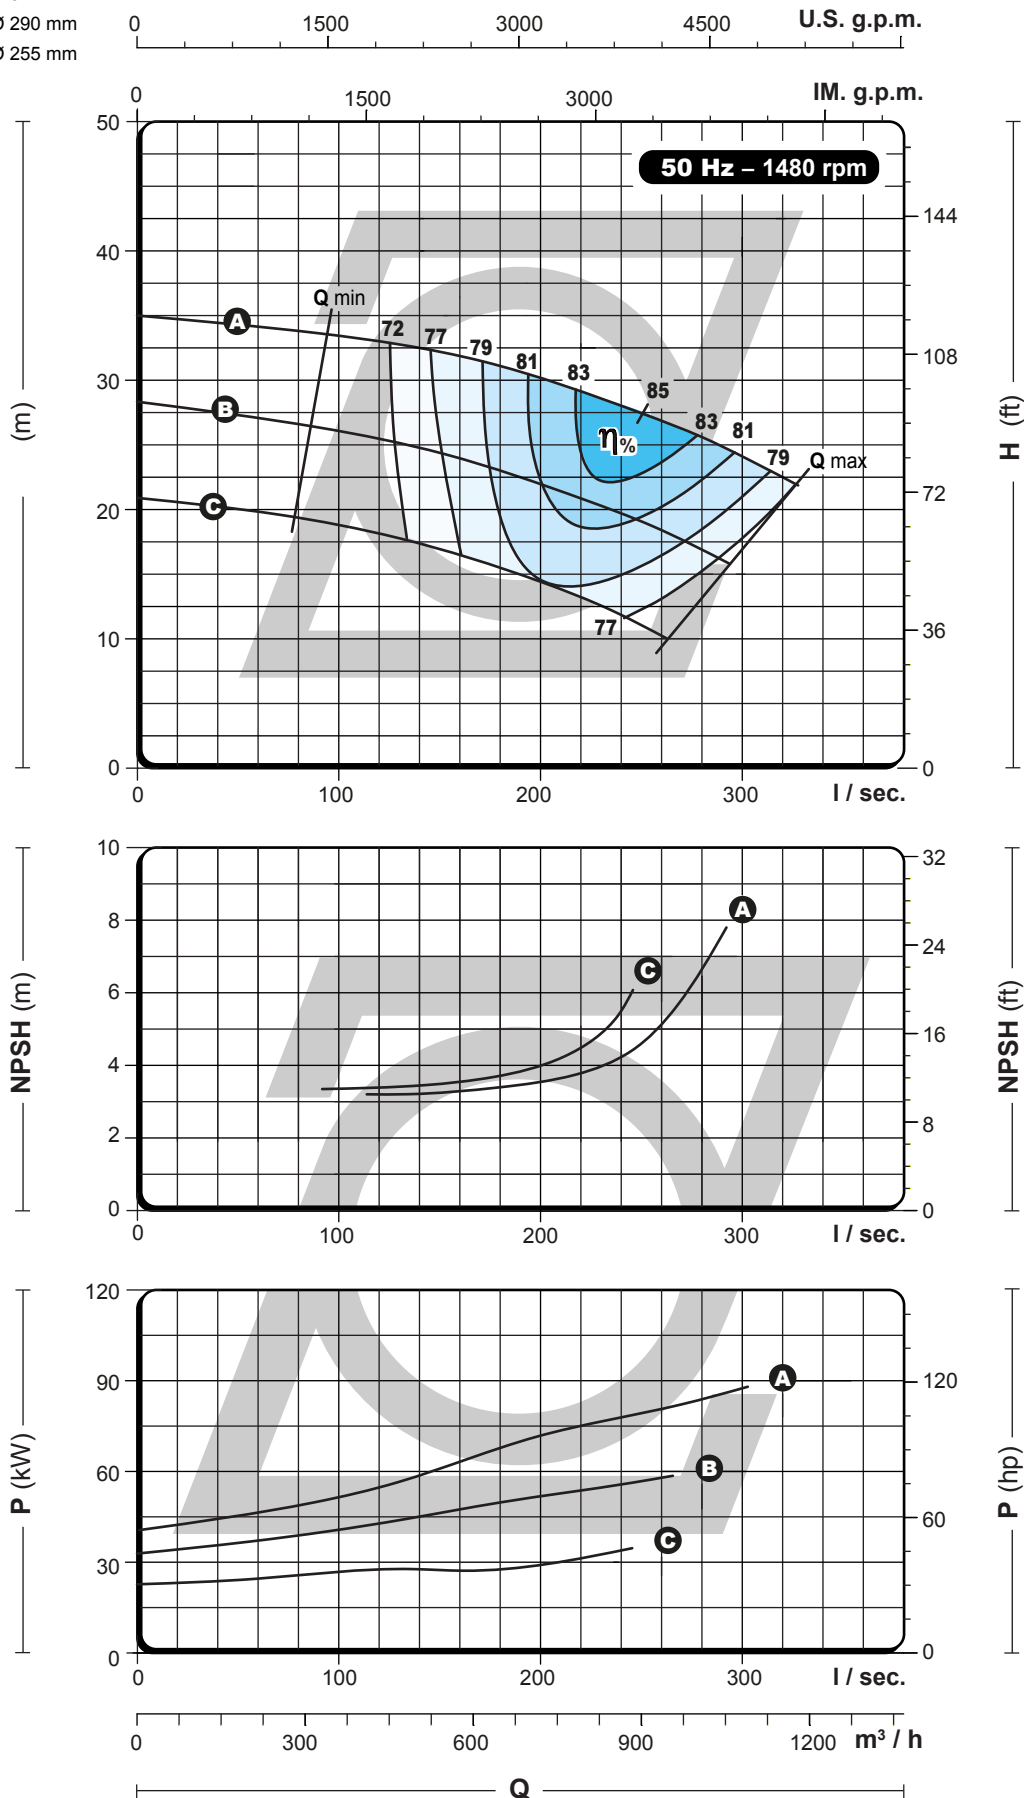

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




300-250-390

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 395 mm
 - B** = Ø 355 mm
 - C** = Ø 320 mm
 - D** = Ø 300 mm

0 2000 4000 6000 U.S. g.p.m.

0 2000 4000 IM. g.p.m.

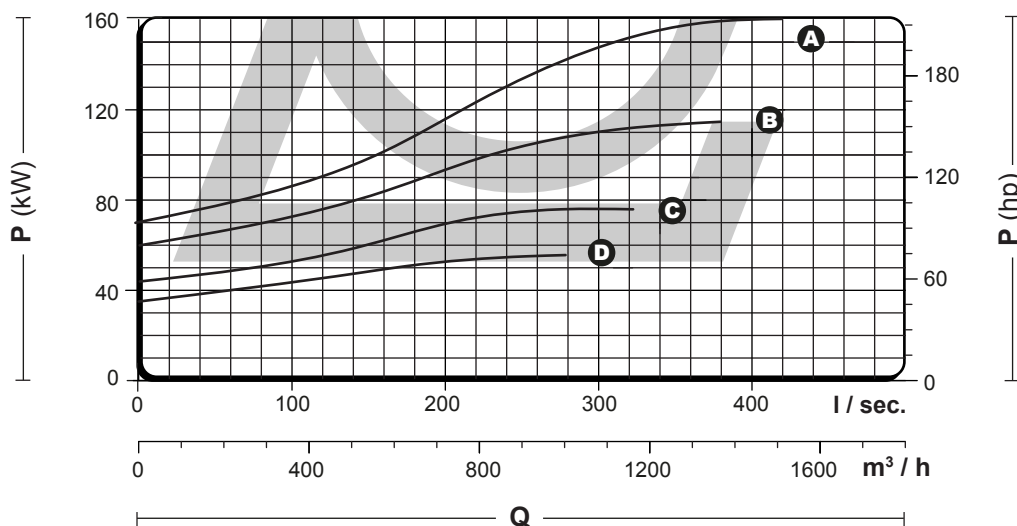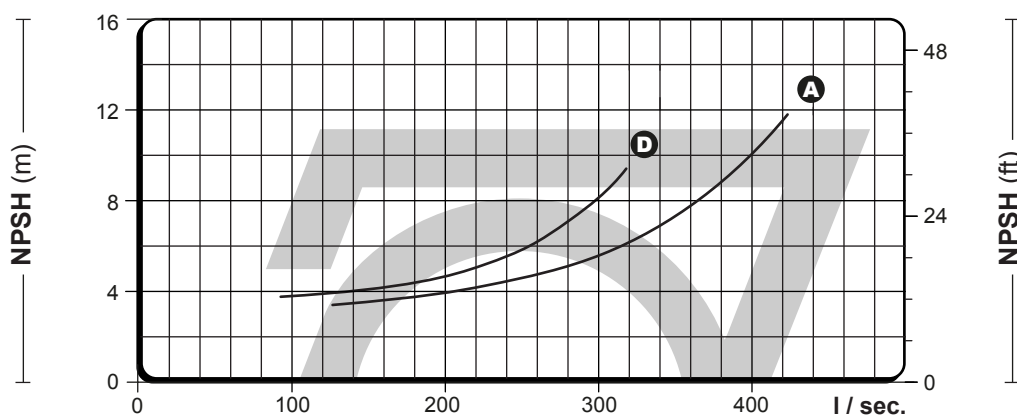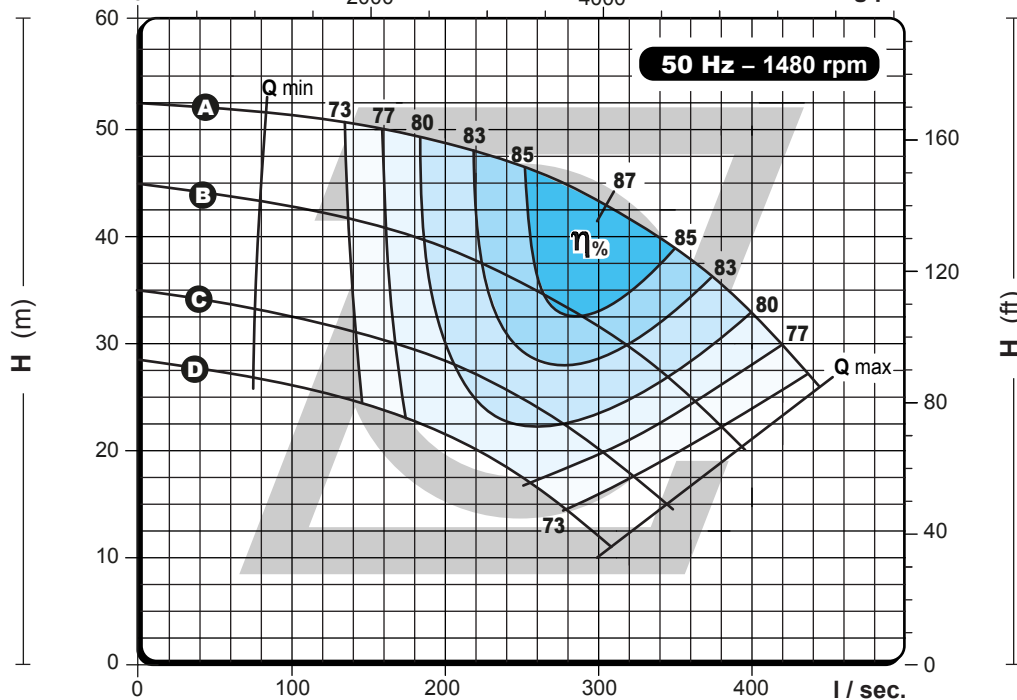

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

300-250-490

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 490 mm
 - B** = Ø 455 mm
 - C** = Ø 420 mm
 - D** = Ø 382 mm

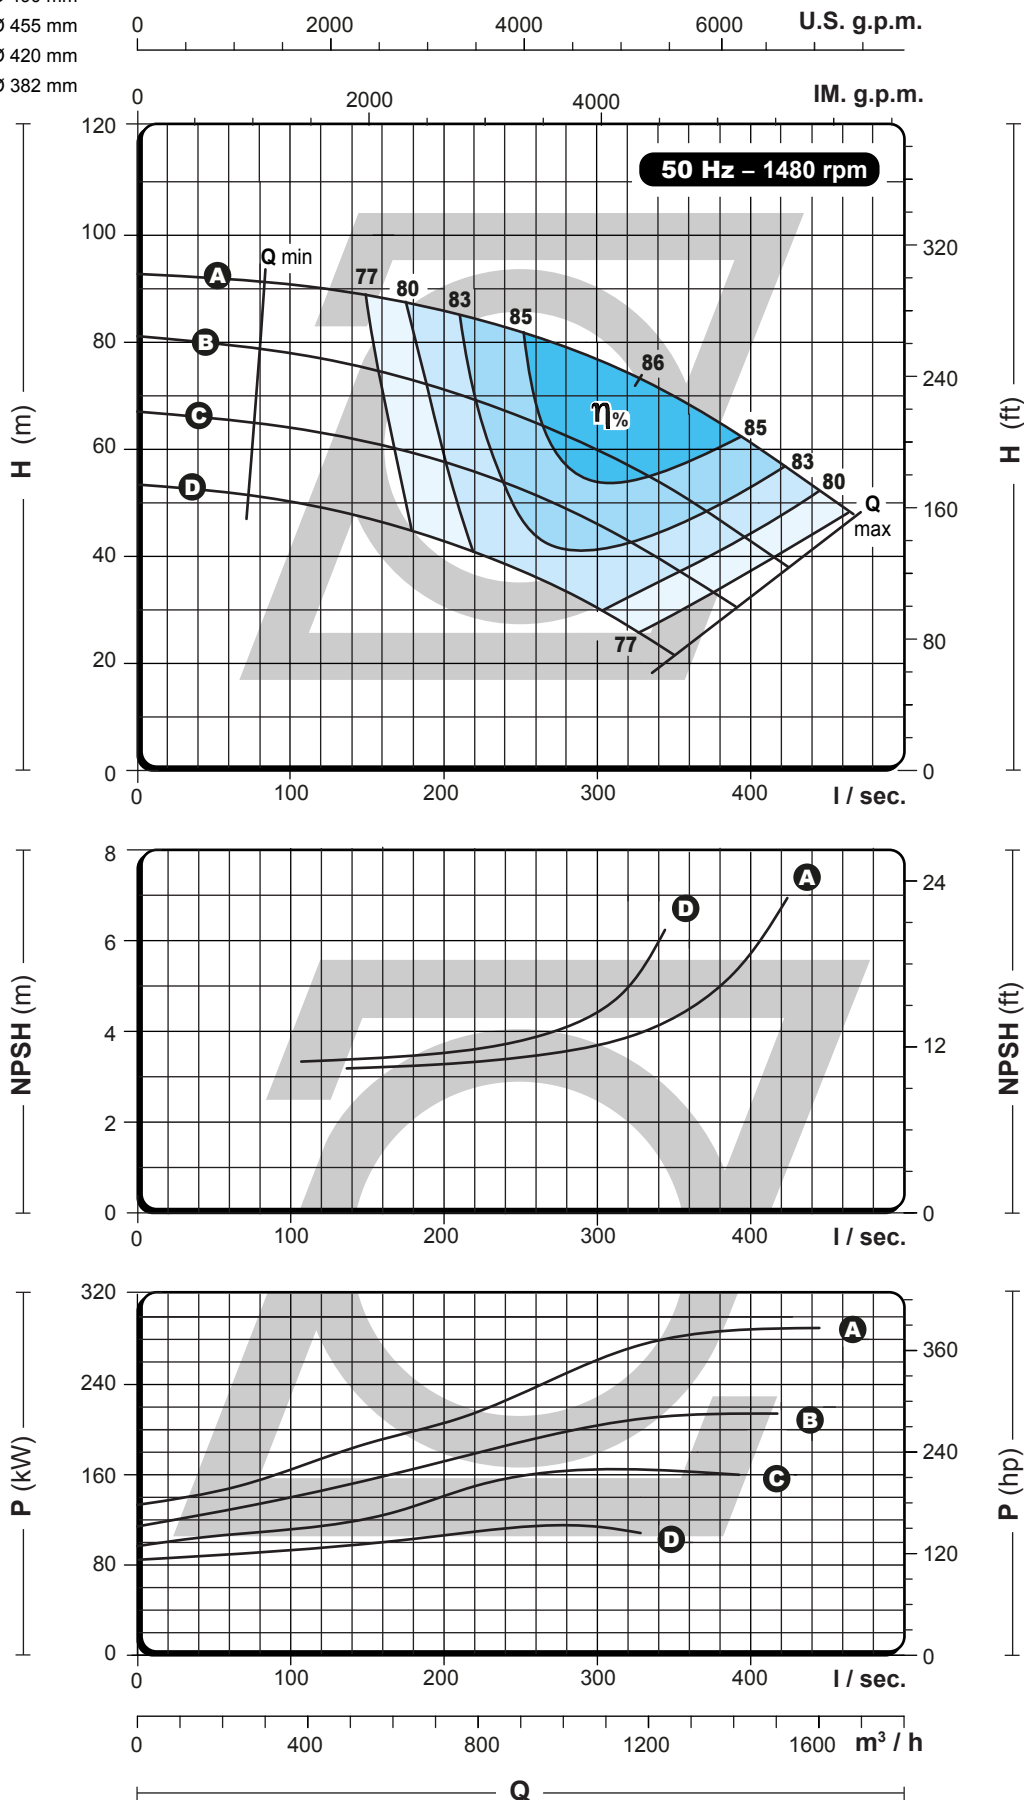

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

300-250-610

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 610 mm
 - B** = Ø 570 mm
 - C** = Ø 520 mm
 - D** = Ø 480 mm

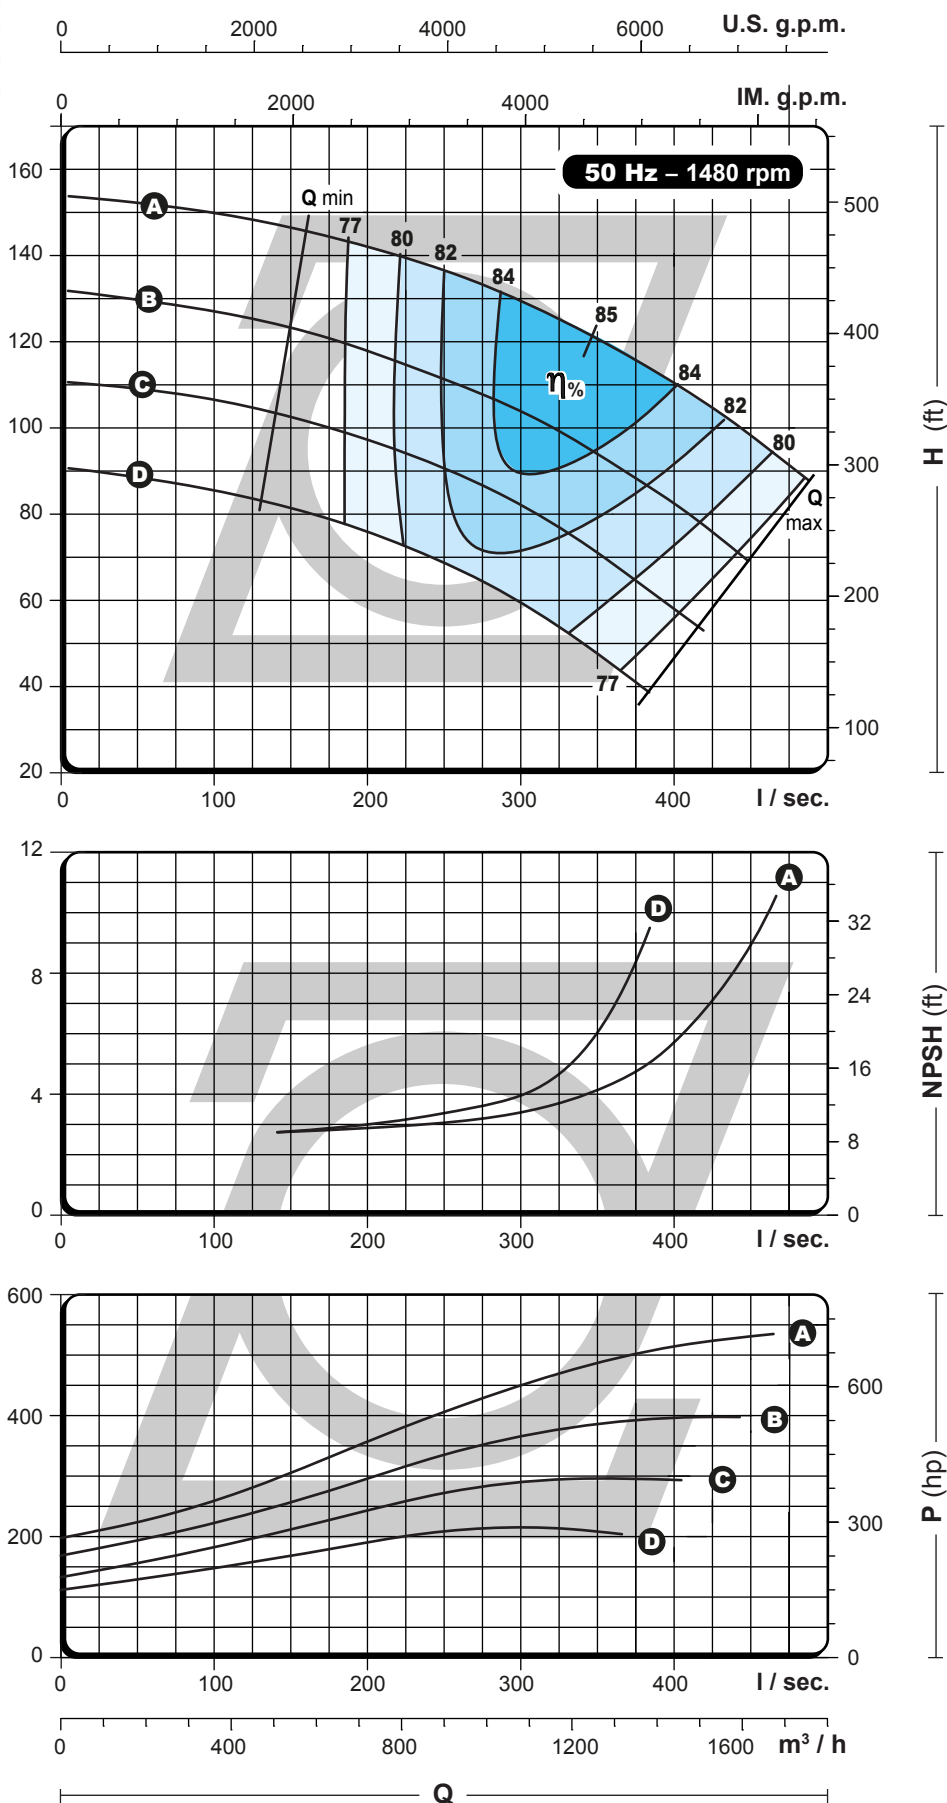

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

300-250-780

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 765 mm
 - B** = Ø 730 mm
 - C** = Ø 695 mm
 - D** = Ø 650 mm

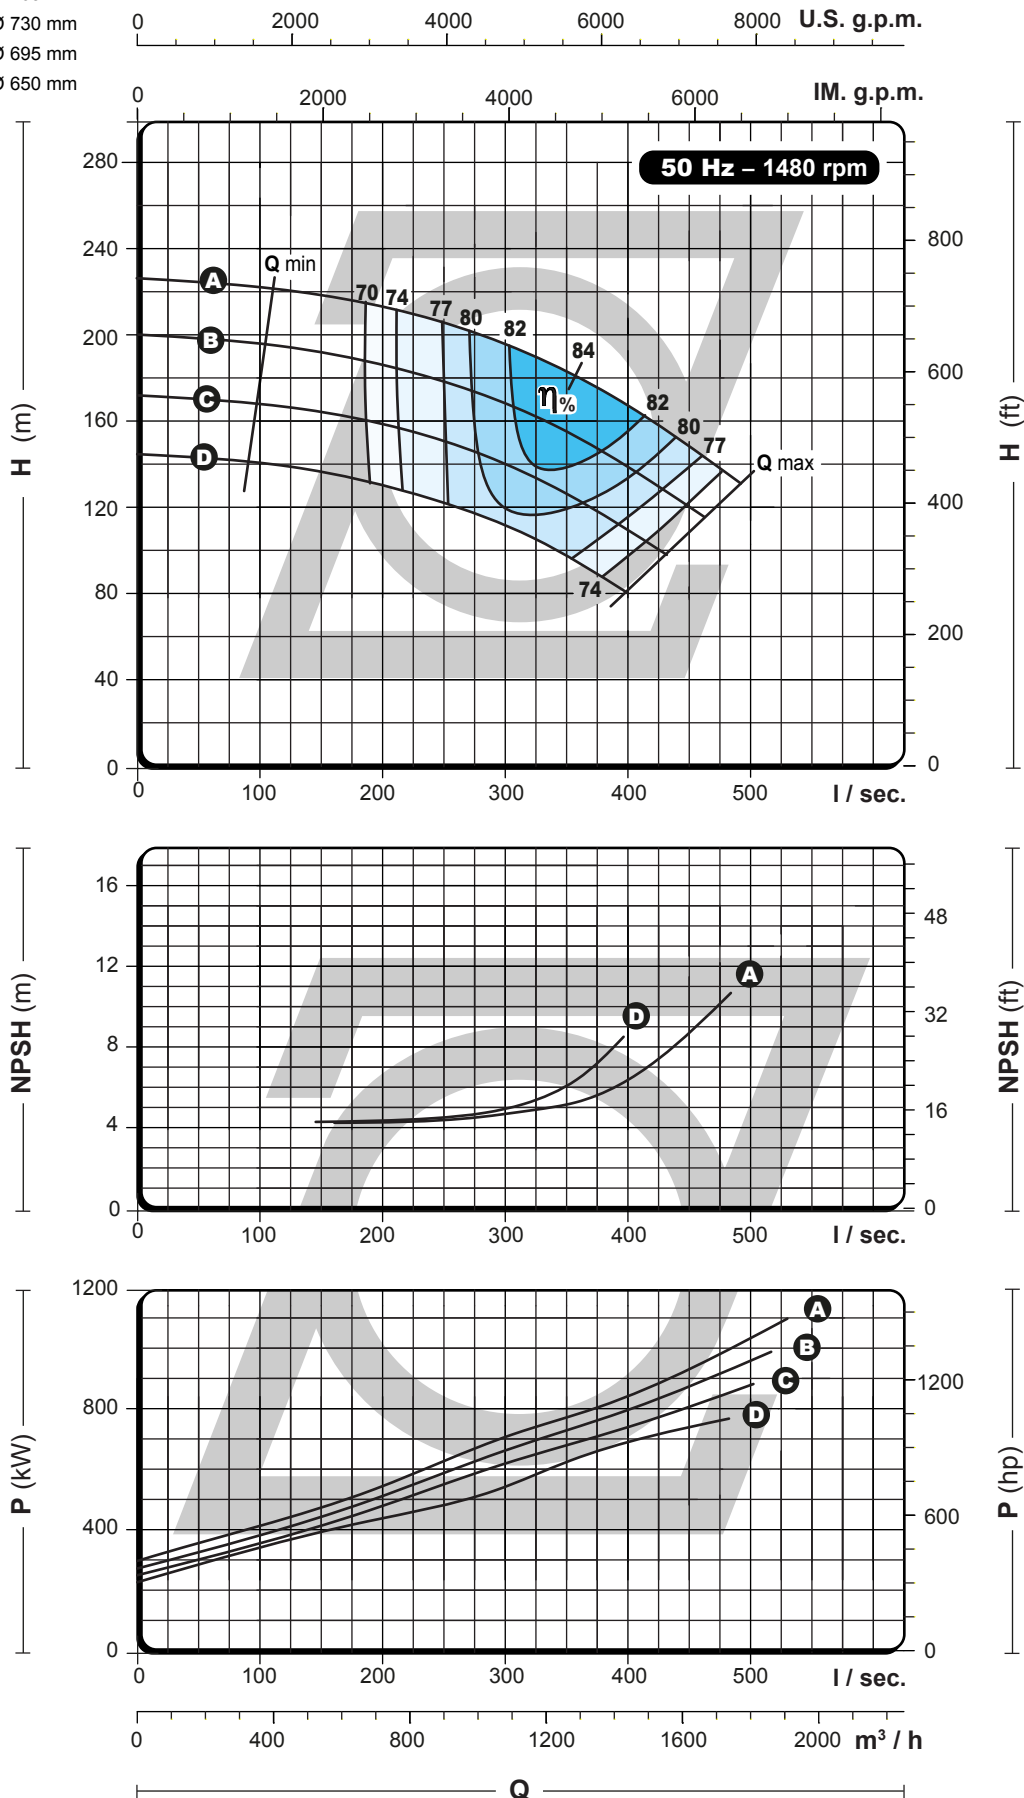

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




350-300-310

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 310 mm
B = Ø 285 mm
C = Ø 270 mm

0 1600 3200 4800 6400 U.S. g.p.m.

0 1600 3200 4800 IM. g.p.m.

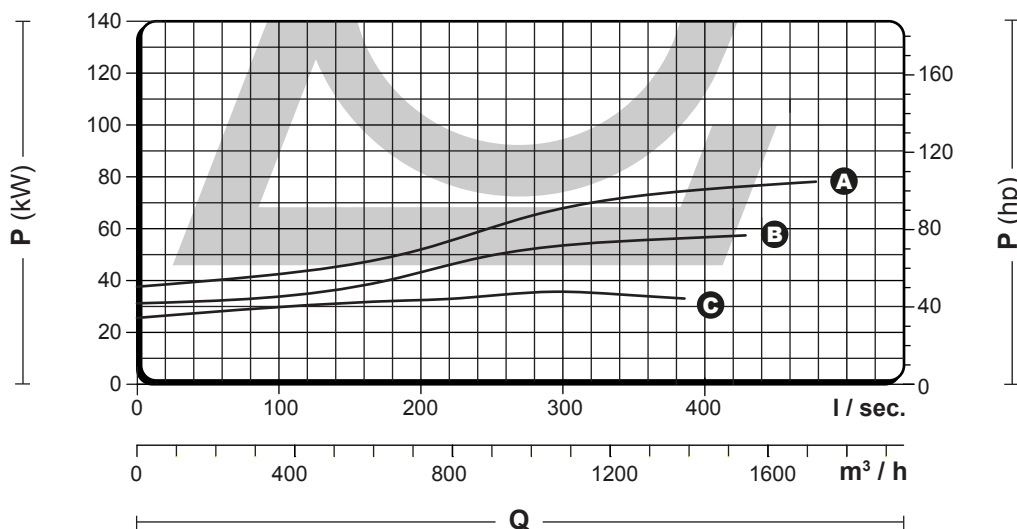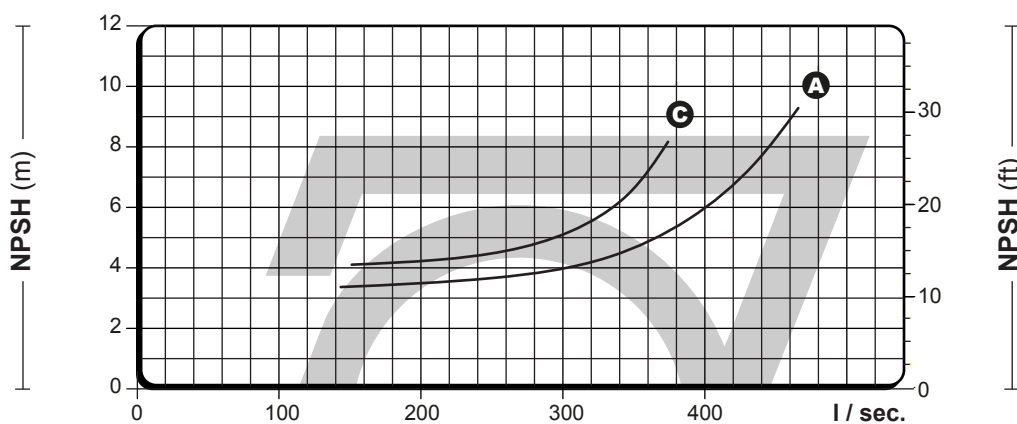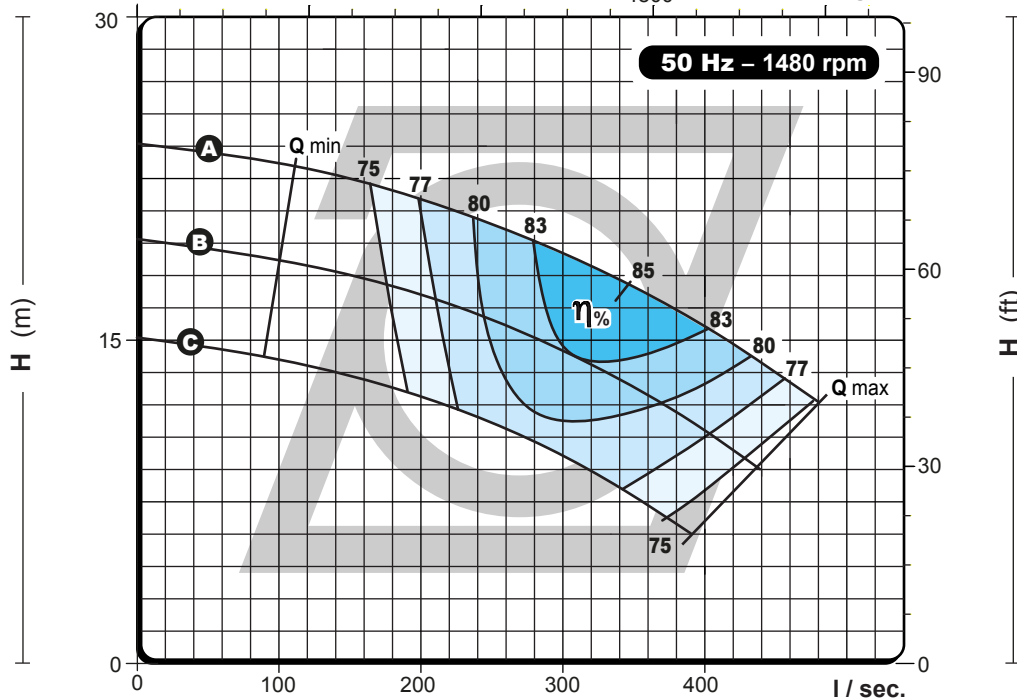

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

350-300-330

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 350 mm
 - B** = Ø 325 mm
 - C** = Ø 300 mm
 - D** = Ø 275 mm

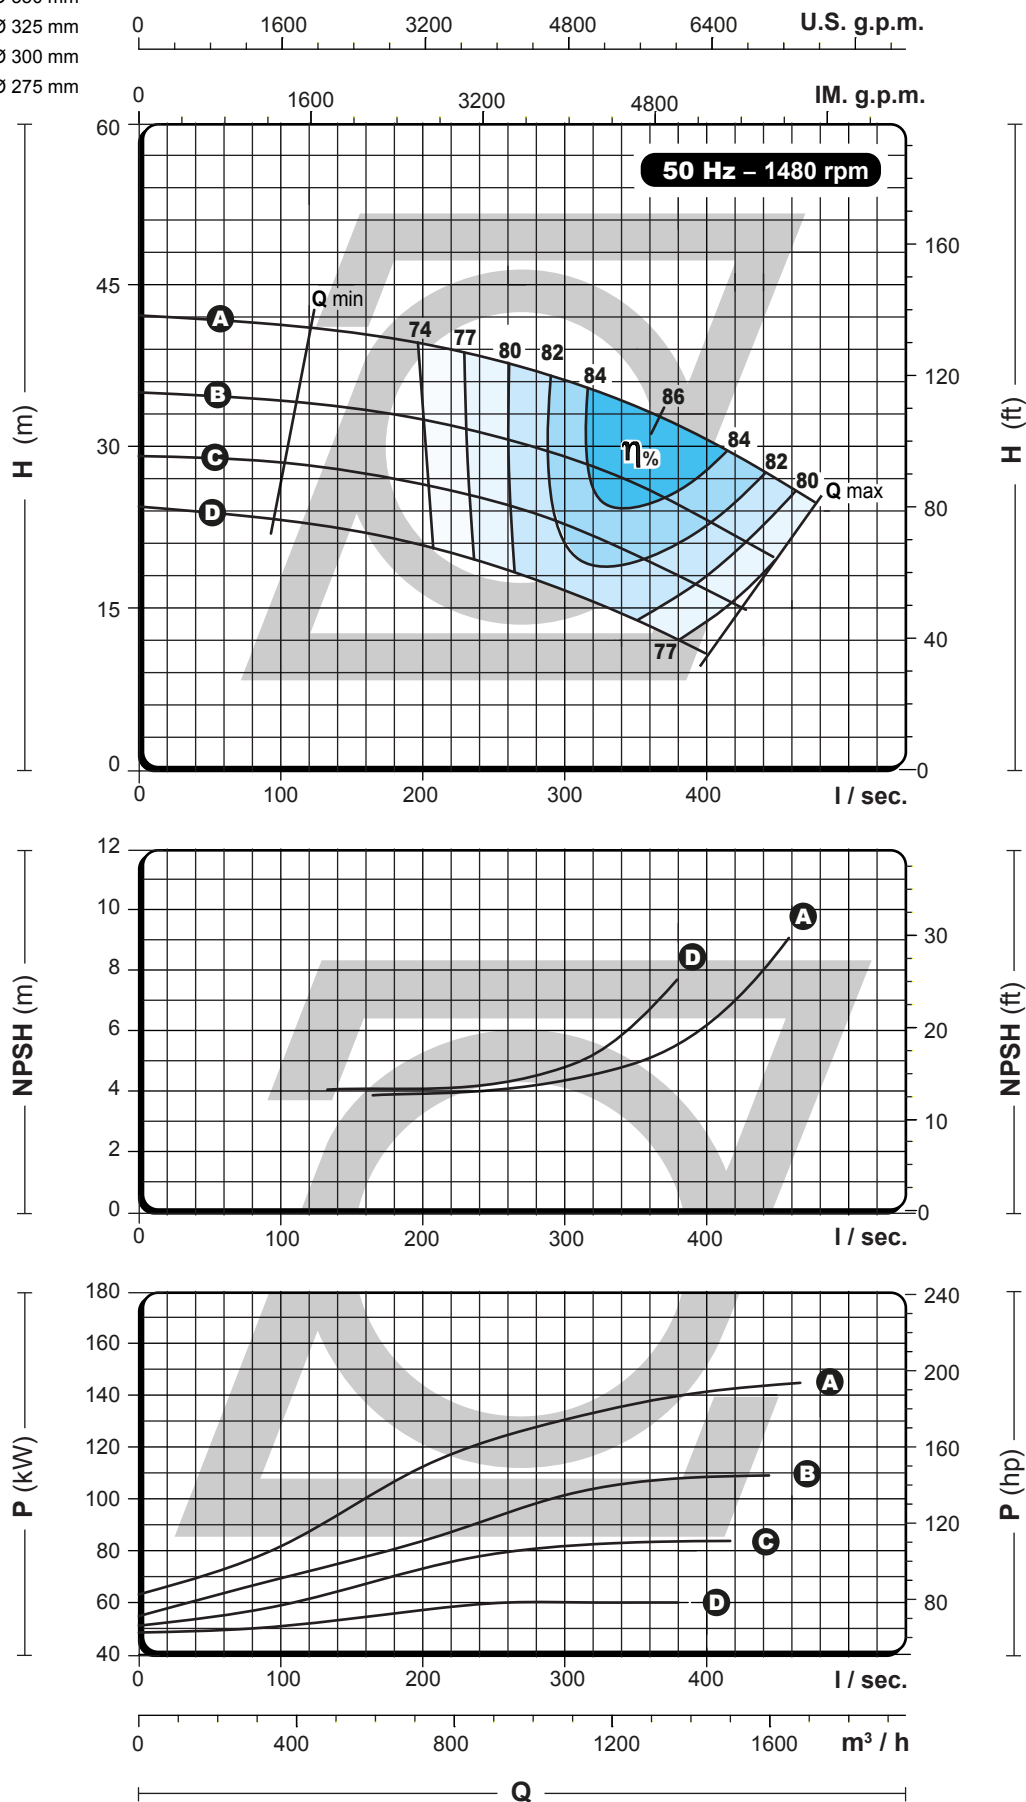

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®


PERFORMANCE
CURVES

400-300-450L

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 450 mm
 - B = Ø 425 mm
 - C = Ø 400 mm
 - D = Ø 375 mm

LOW
CAVITATION
IMPELLER

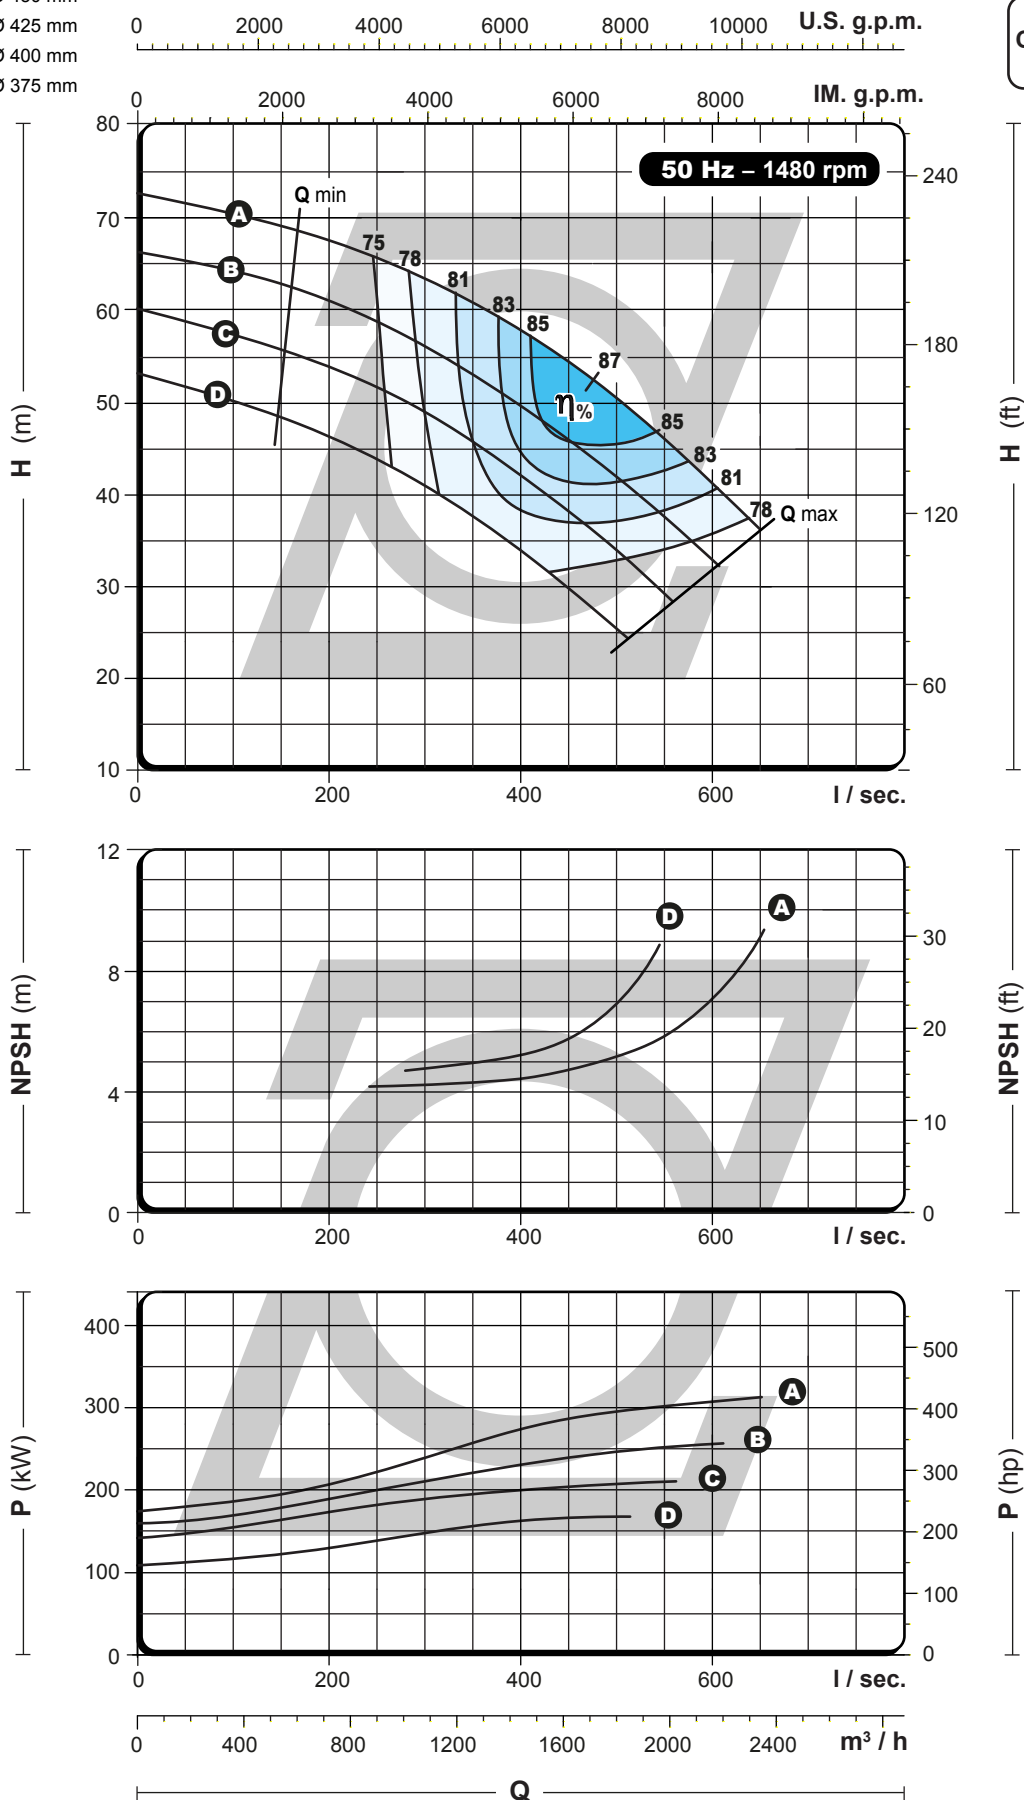

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




400-300-450H

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 450 mm
B = Ø 425 mm
C = Ø 400 mm

0 1000 2000 3000 4000 5000 6000 7000 8000 U.S. g.p.m.

HIGH
EFFICIENCY
IMPELLER

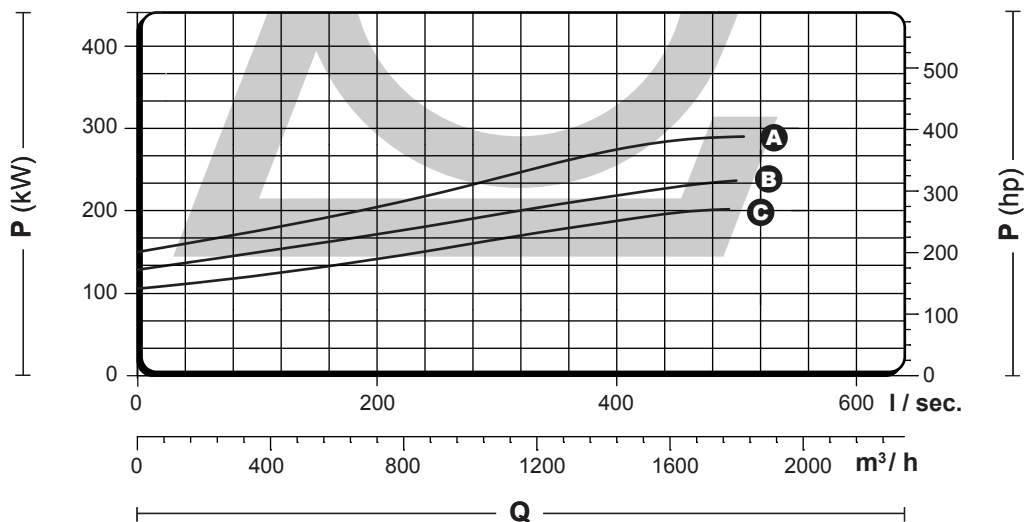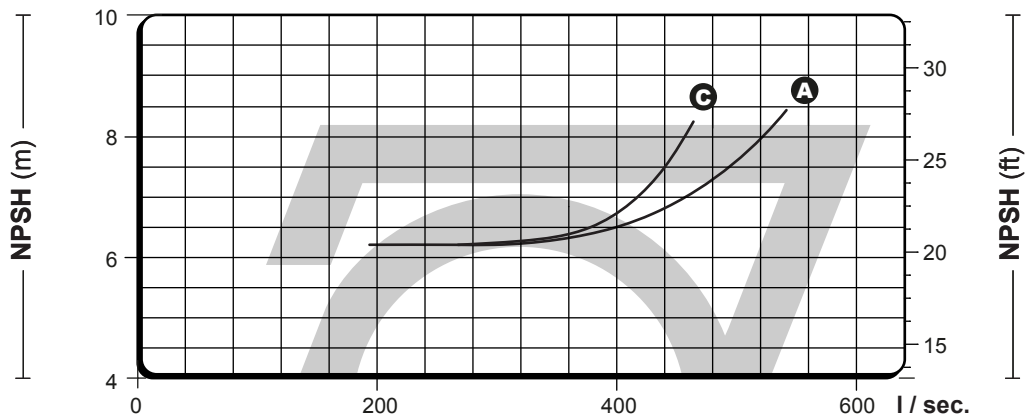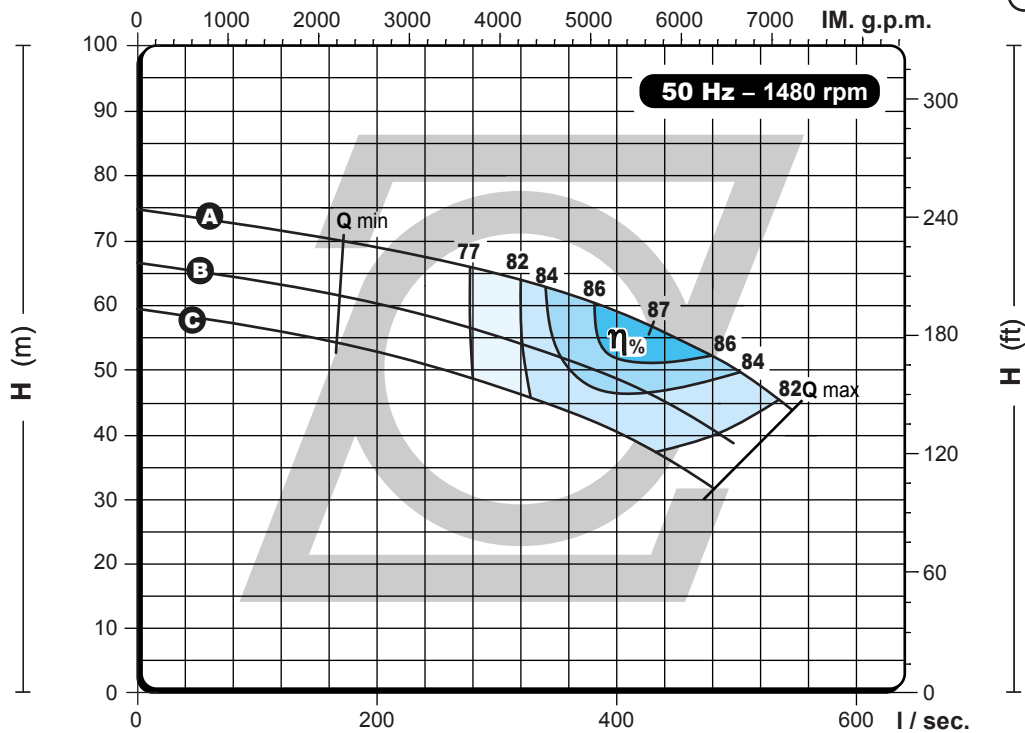

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




400-300-570

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 580 mm
 - B** = Ø 540 mm
 - C** = Ø 500 mm
 - D** = Ø 460 mm

0 2000 4000 6000 8000 10000 U.S. g.p.m.

0 2000 4000 6000 8000 IM. g.p.m.

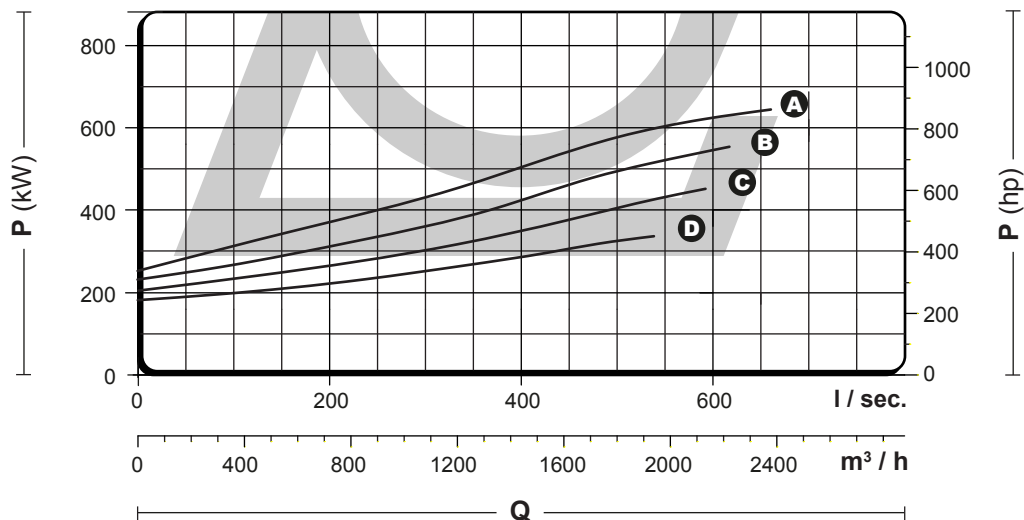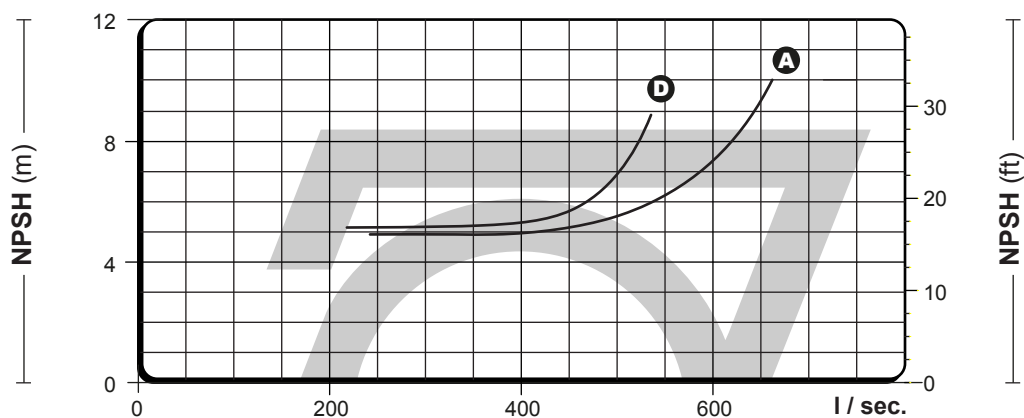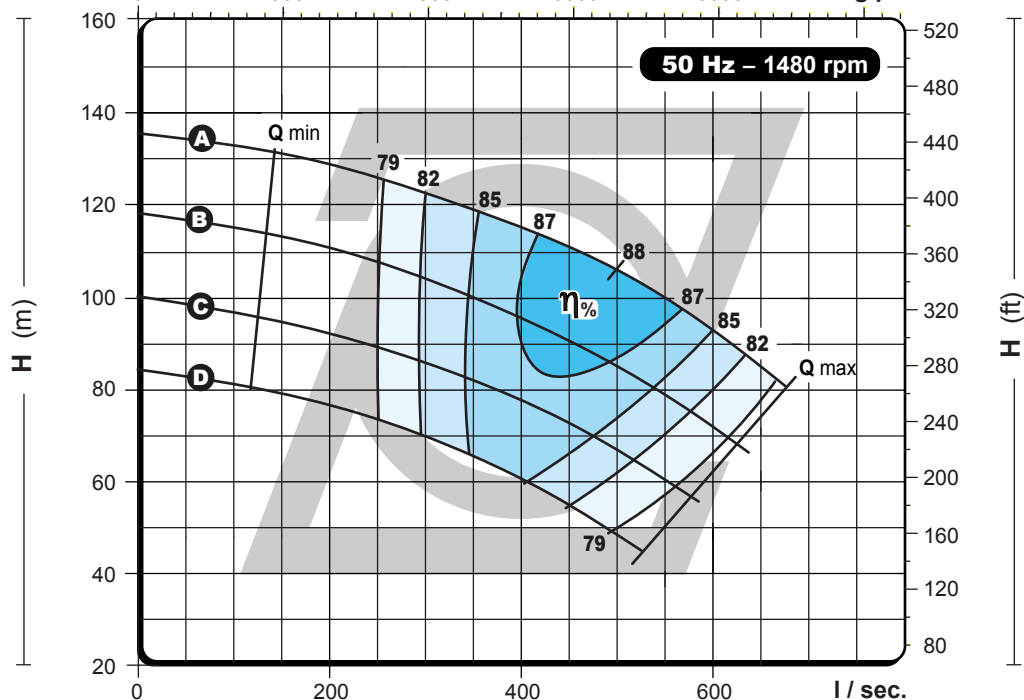

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

400-300-700

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 700 mm
 - B = Ø 654 mm
 - C = Ø 600 mm
 - D = Ø 550 mm

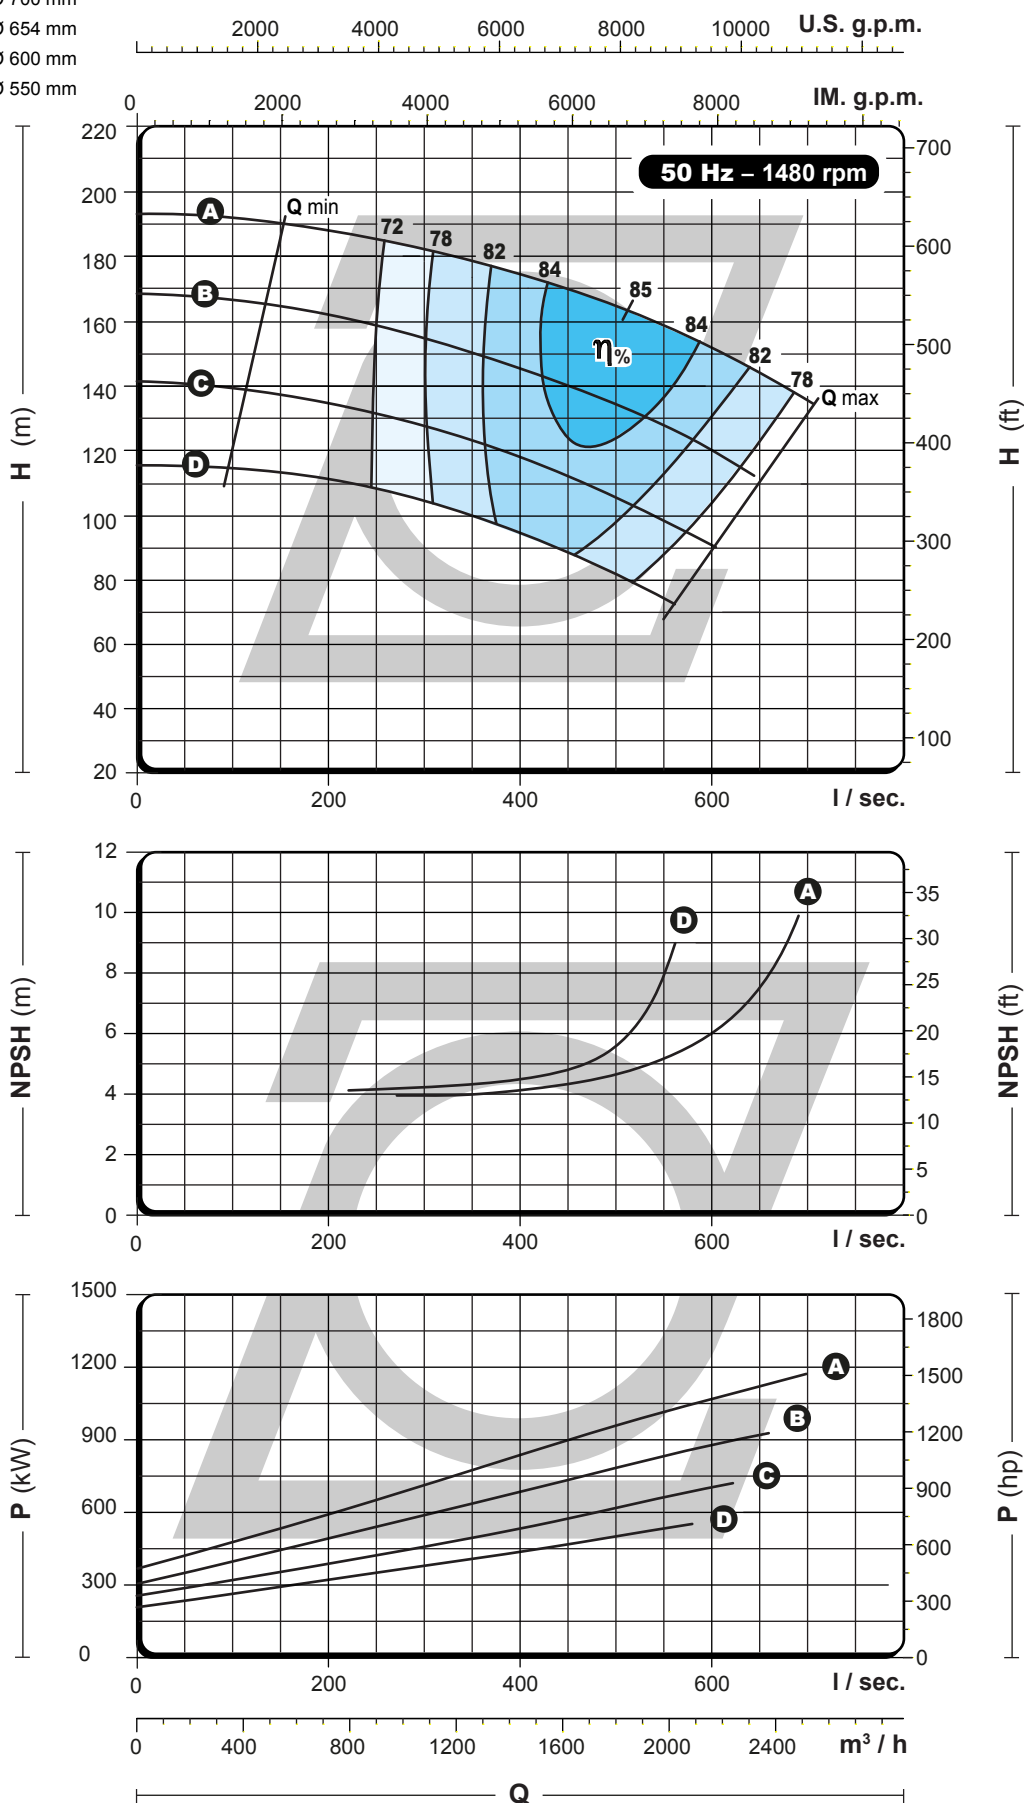

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

400-350-360

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 360 mm
B = Ø 315 mm
C = Ø 270 mm

0 2000 4000 6000 8000 10000 U.S. g.p.m.

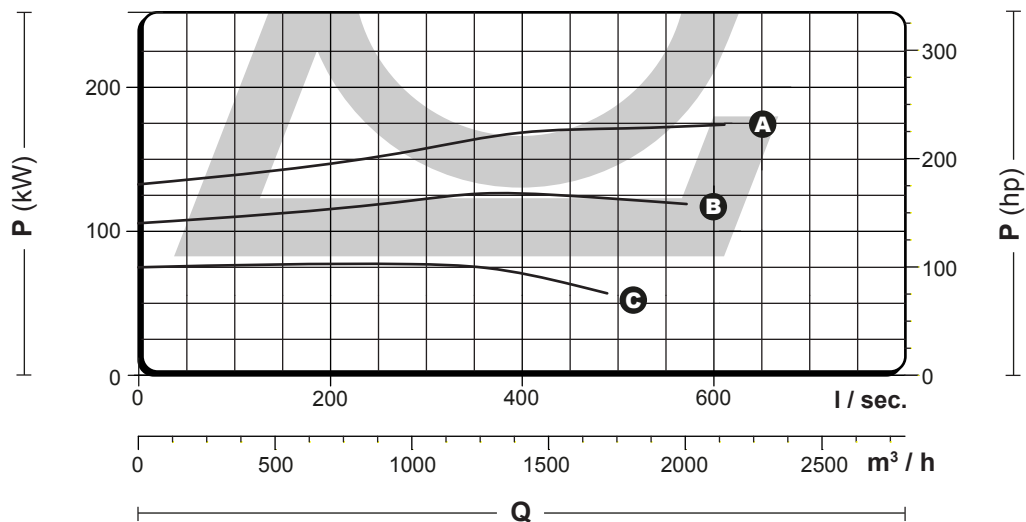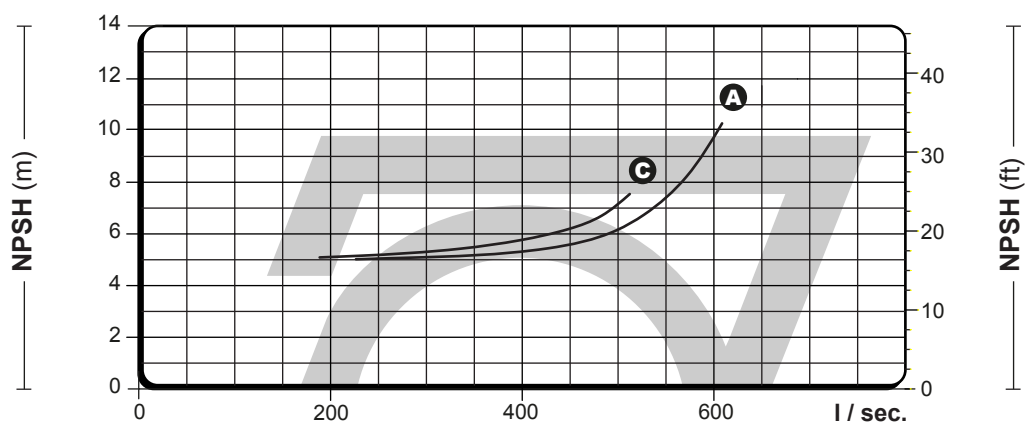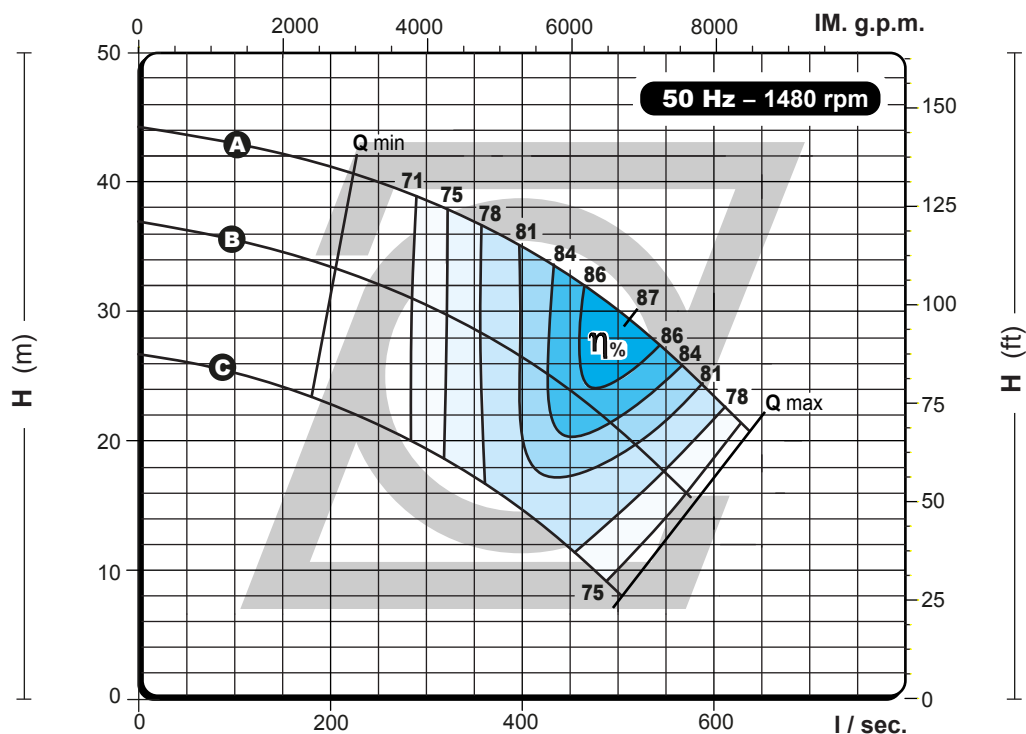

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

400-350-380

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 415 mm
B = Ø 380 mm
C = Ø 350 mm

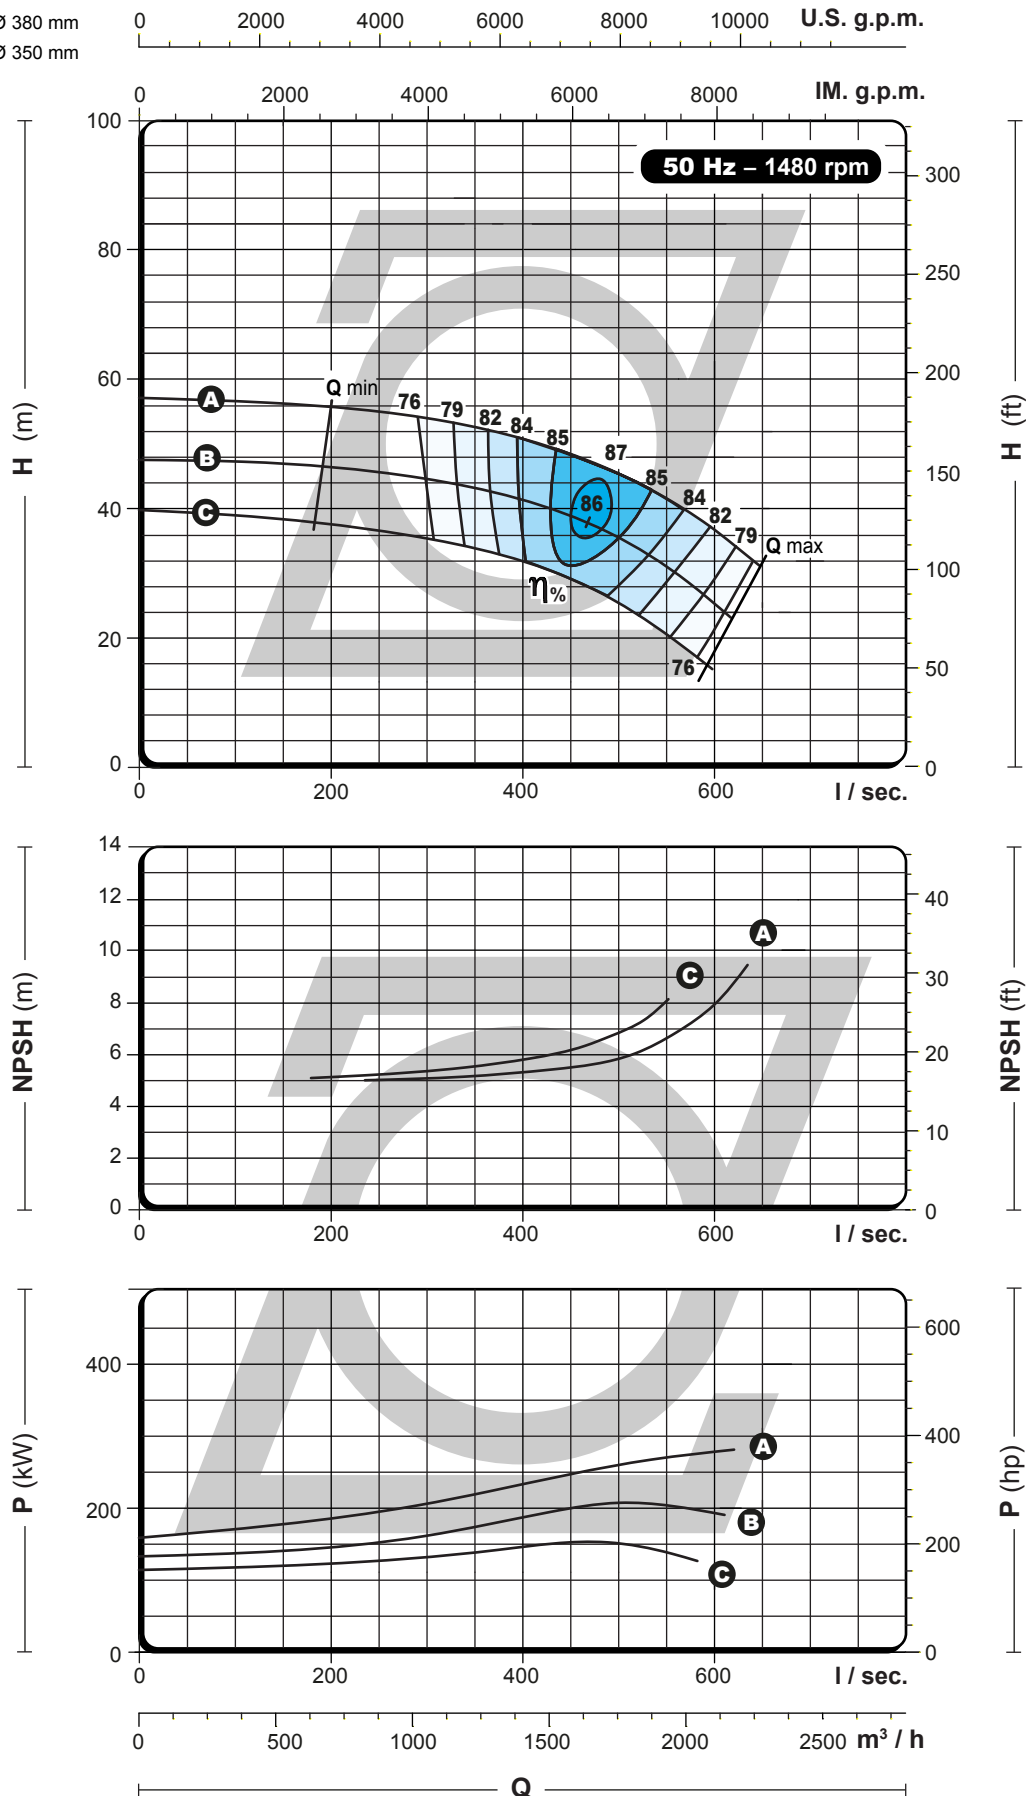

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




400-350-520

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 558 mm
 - B** = Ø 520 mm
 - C** = Ø 480 mm
 - D** = Ø 440 mm

0 4000 8000 12000 16000 U.S. g.p.m.

0 4000 8000 12000 IM. g.p.m.

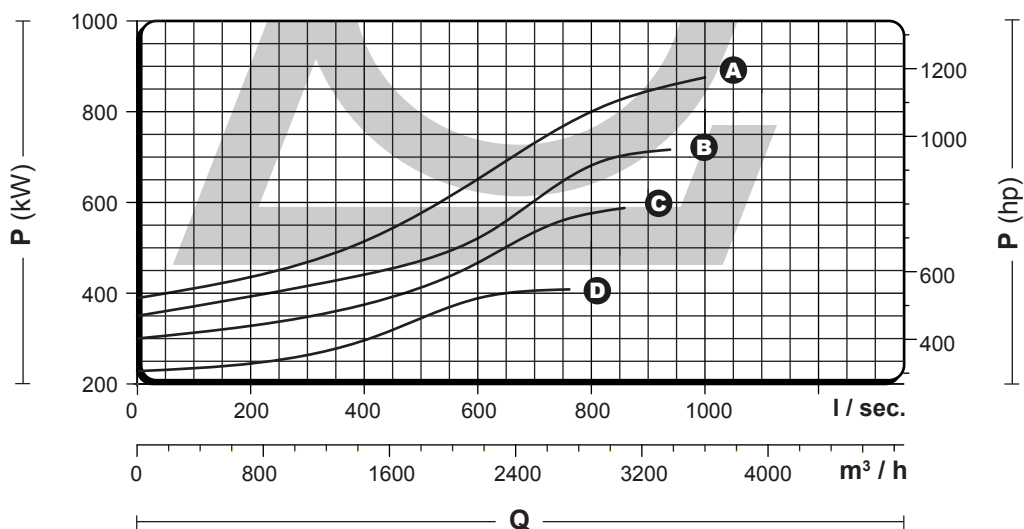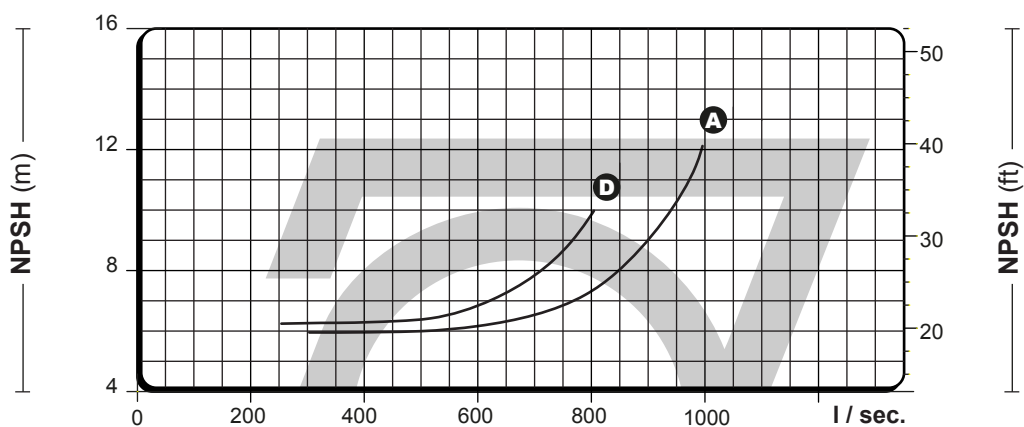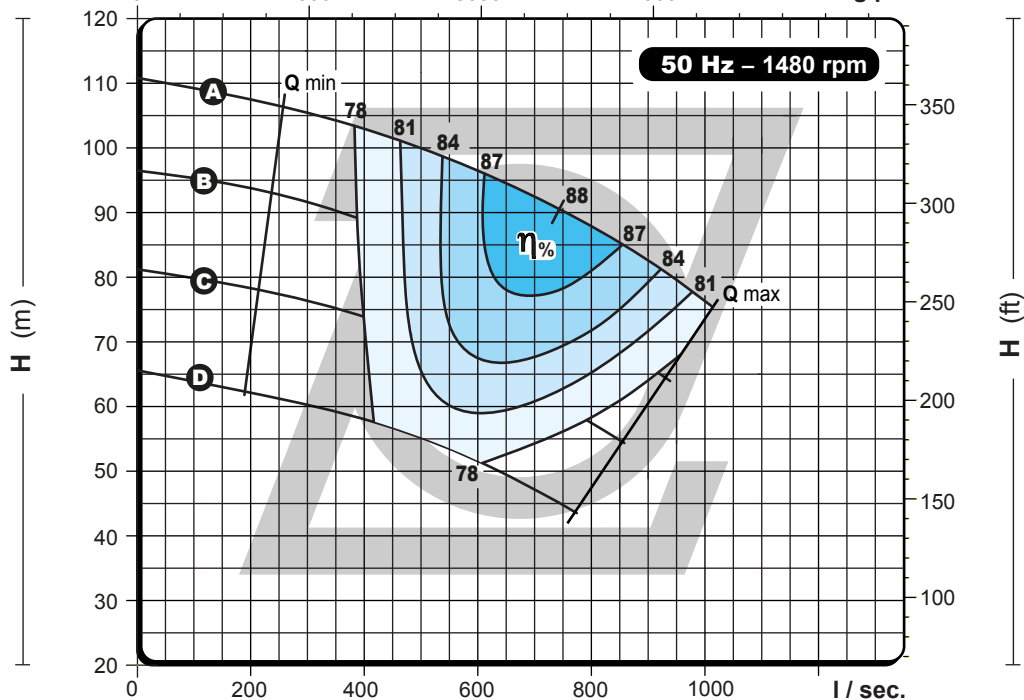

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

450-450-350

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 350 mm
B = Ø 335 mm
C = Ø 315 mm

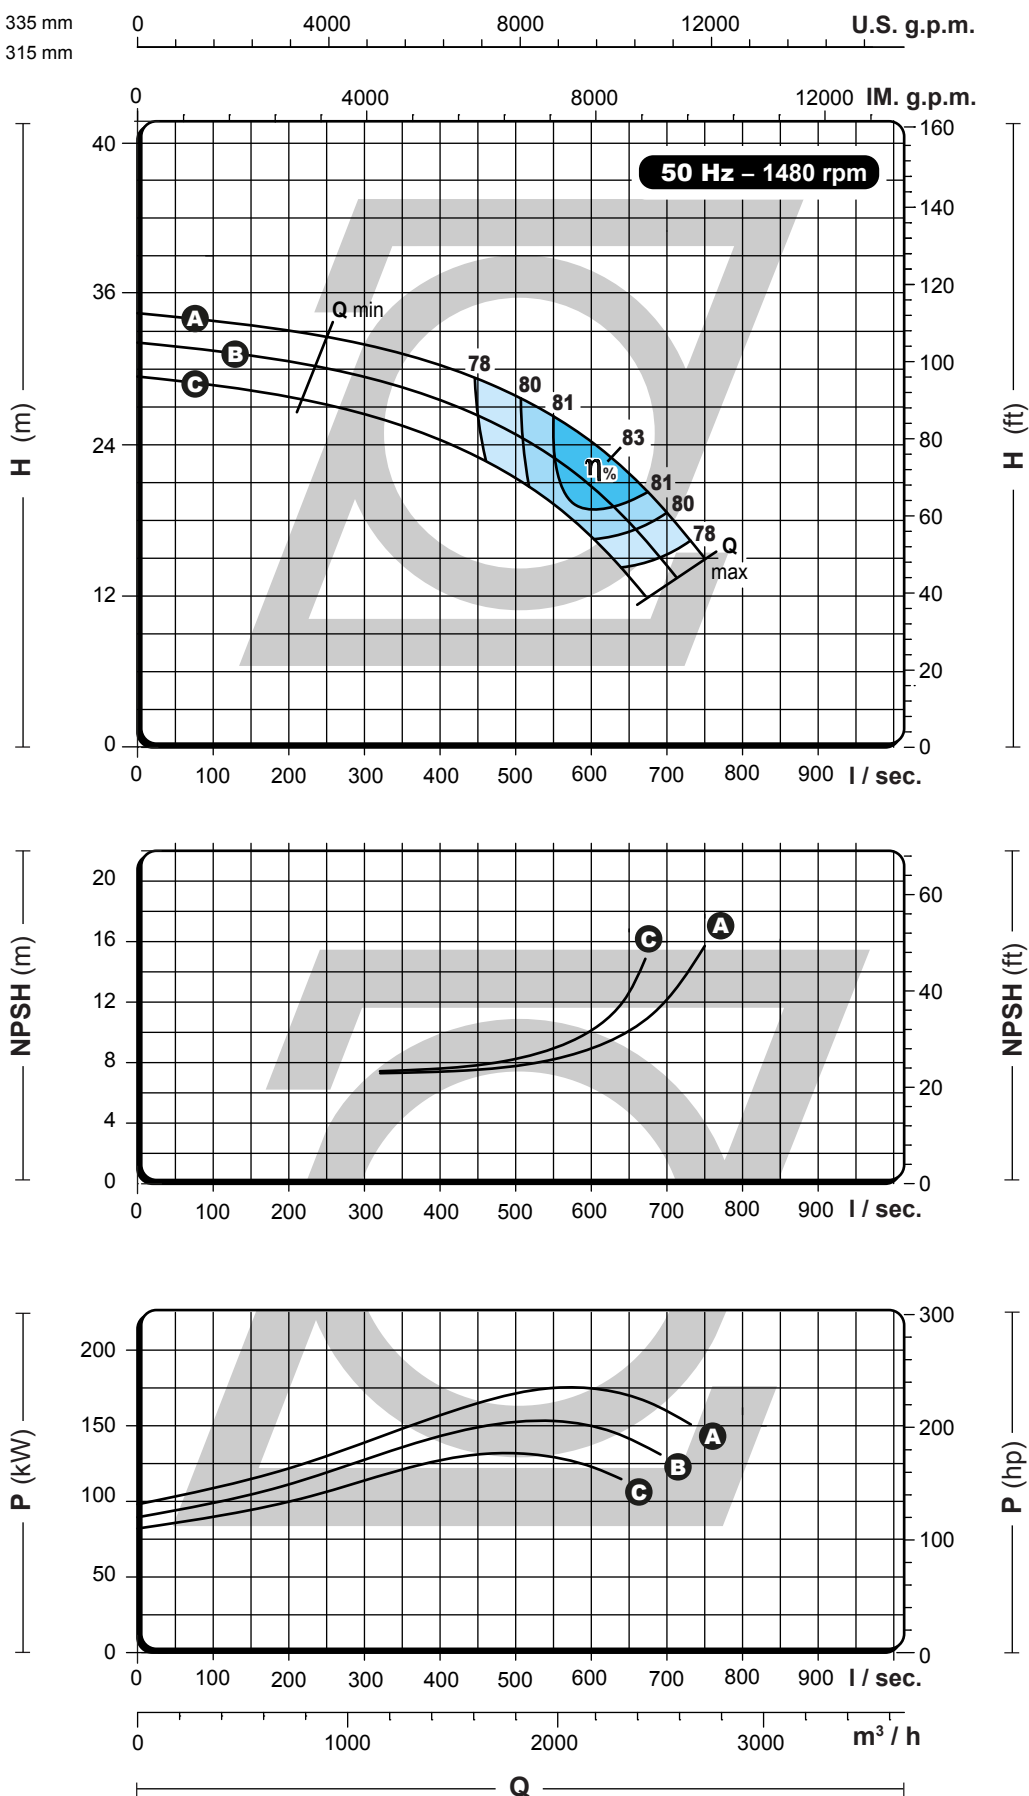

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

500-300-780

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 790 mm
B = Ø 710 mm
C = Ø 620 mm

0 3200 6400 9600 12800 U.S. g.p.m.

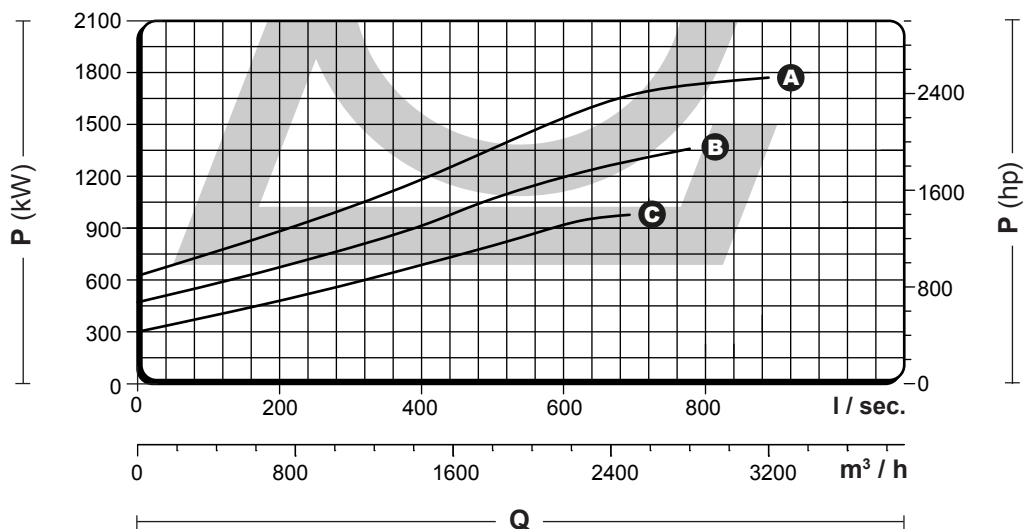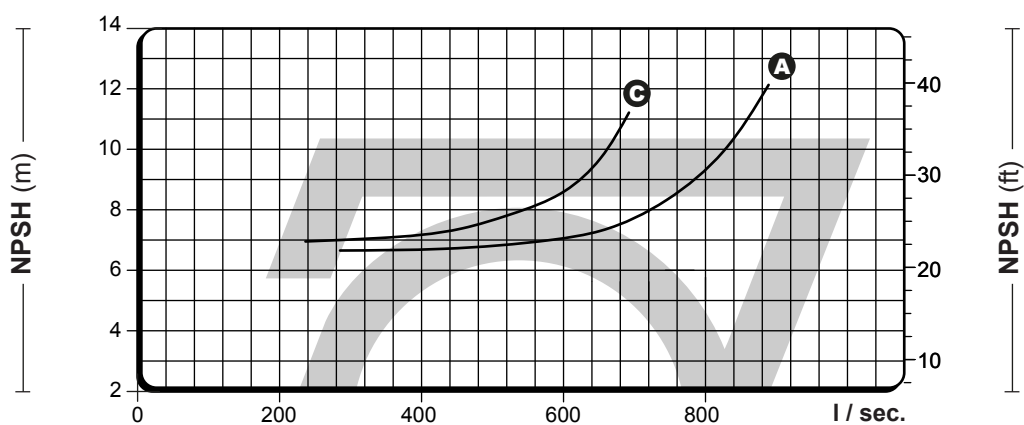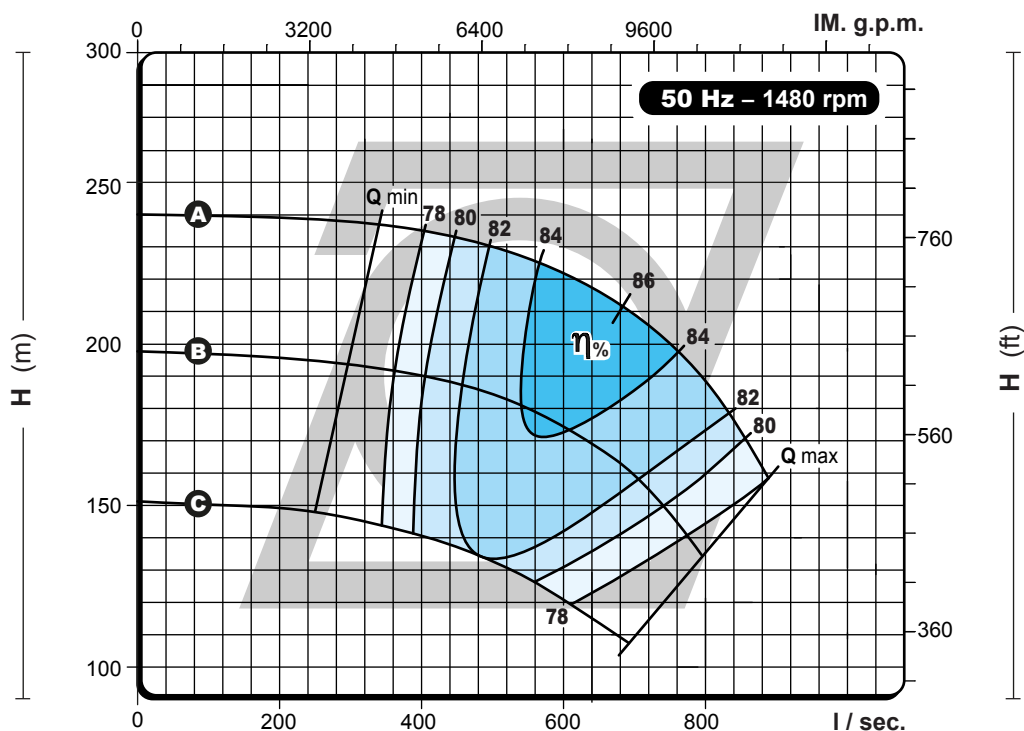

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

500-400-420

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 425 mm
 - B** = Ø 400 mm
 - C** = Ø 375 mm
 - D** = Ø 350 mm

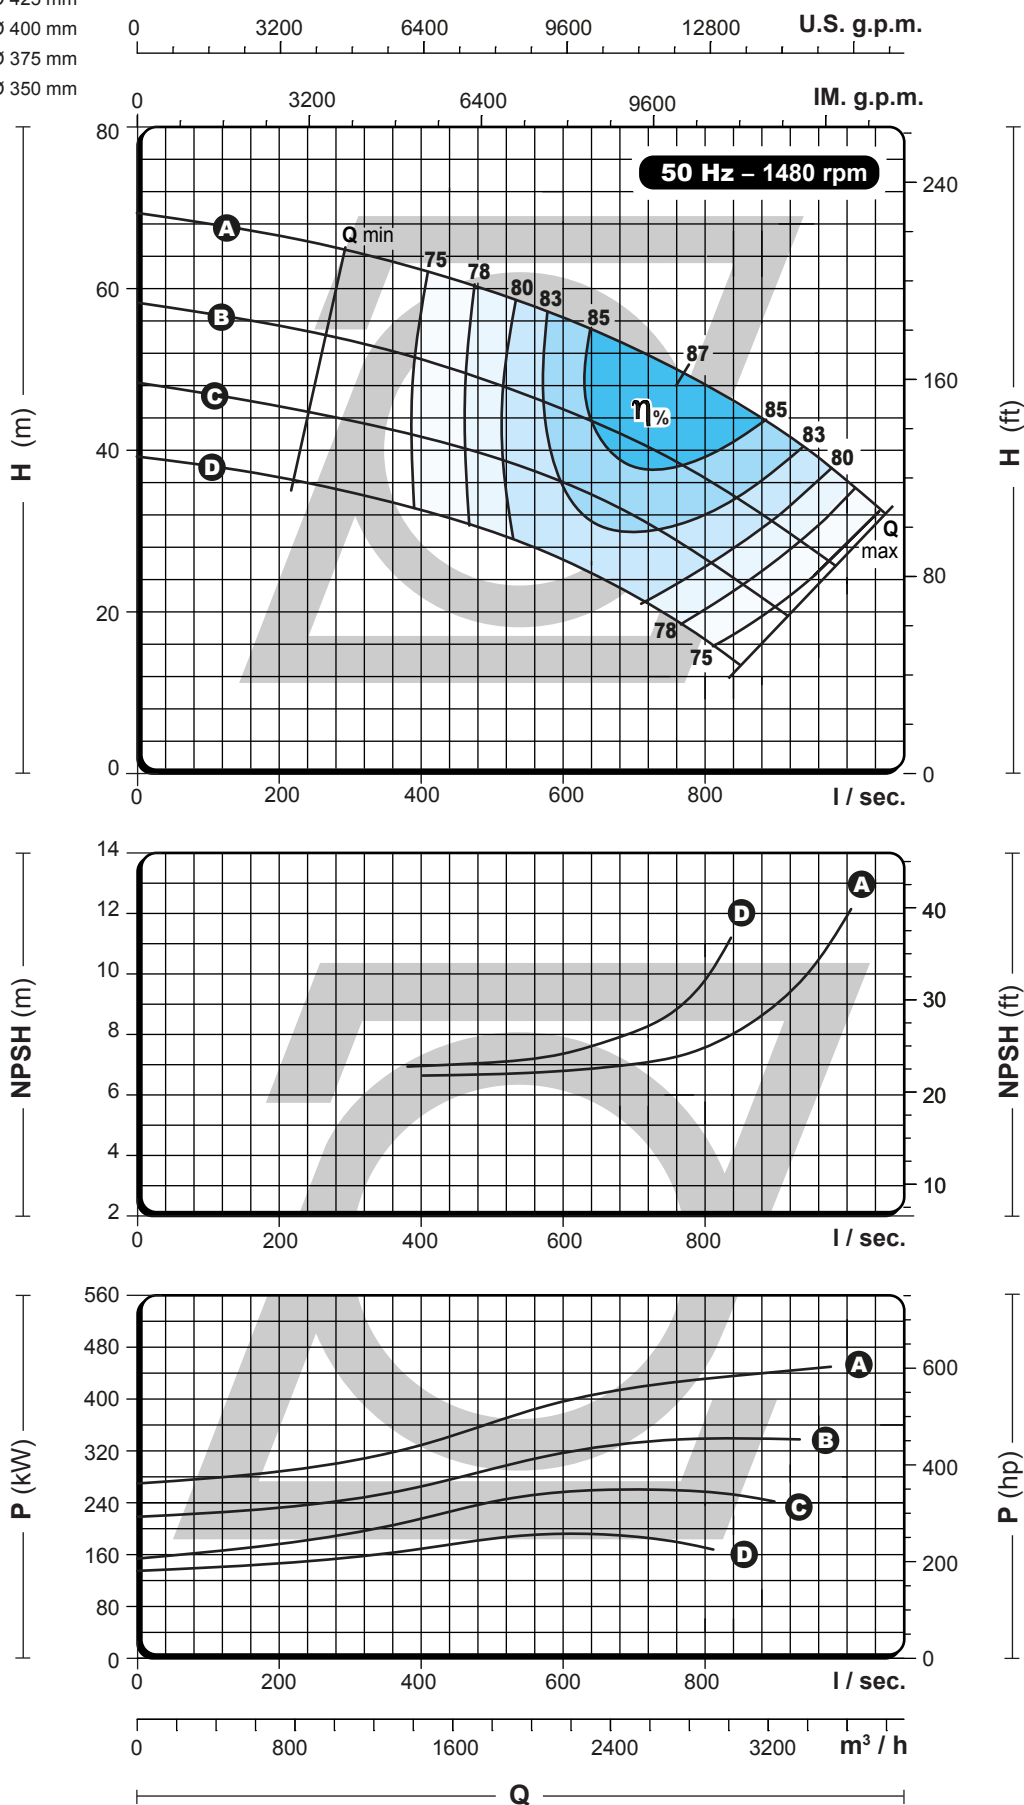

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it






POMPE ZANNI®

PERFORMANCE
CURVES

500-400-540

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 570 mm
 - B** = Ø 545 mm
 - C** = Ø 520 mm
 - D** = Ø 500 mm

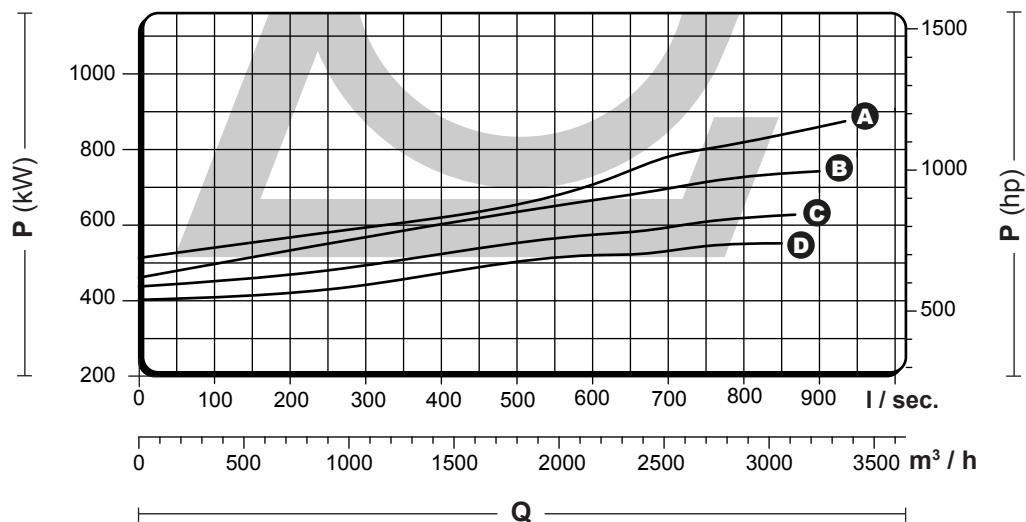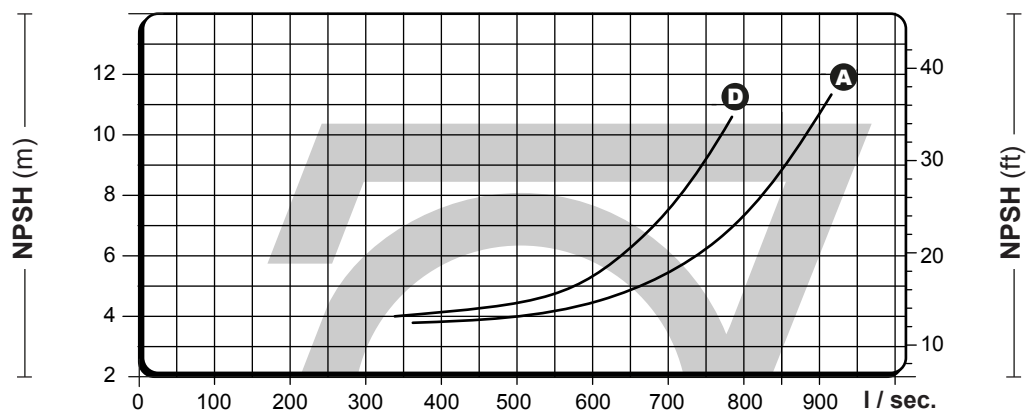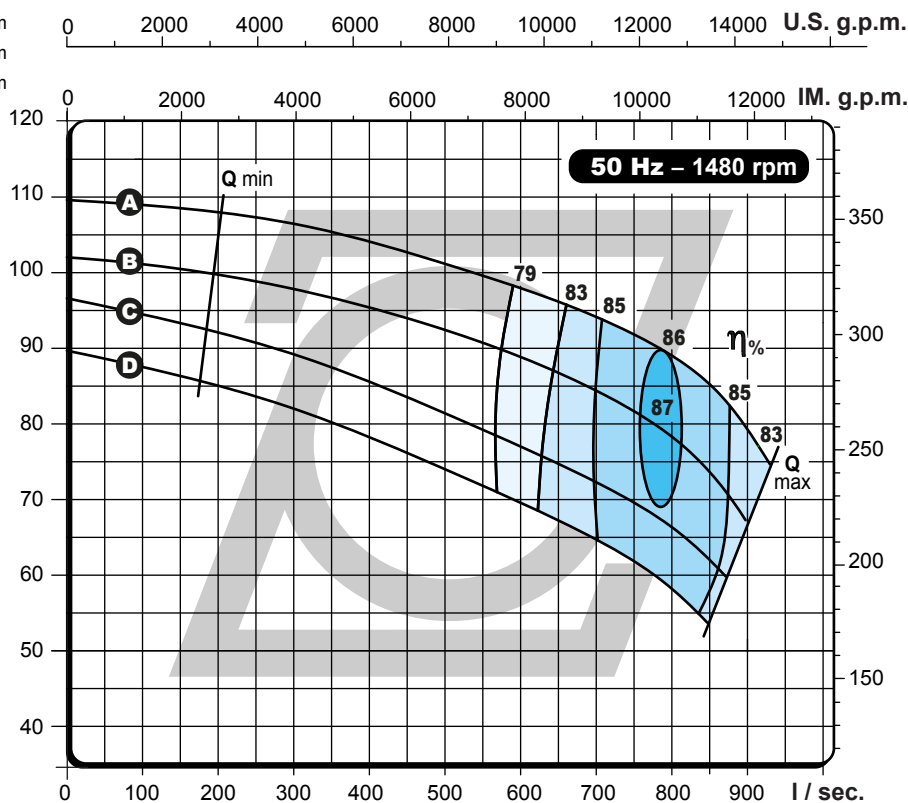

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

500-400-660

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER
A = Ø 666 mm
B = Ø 615 mm
C = Ø 540 mm

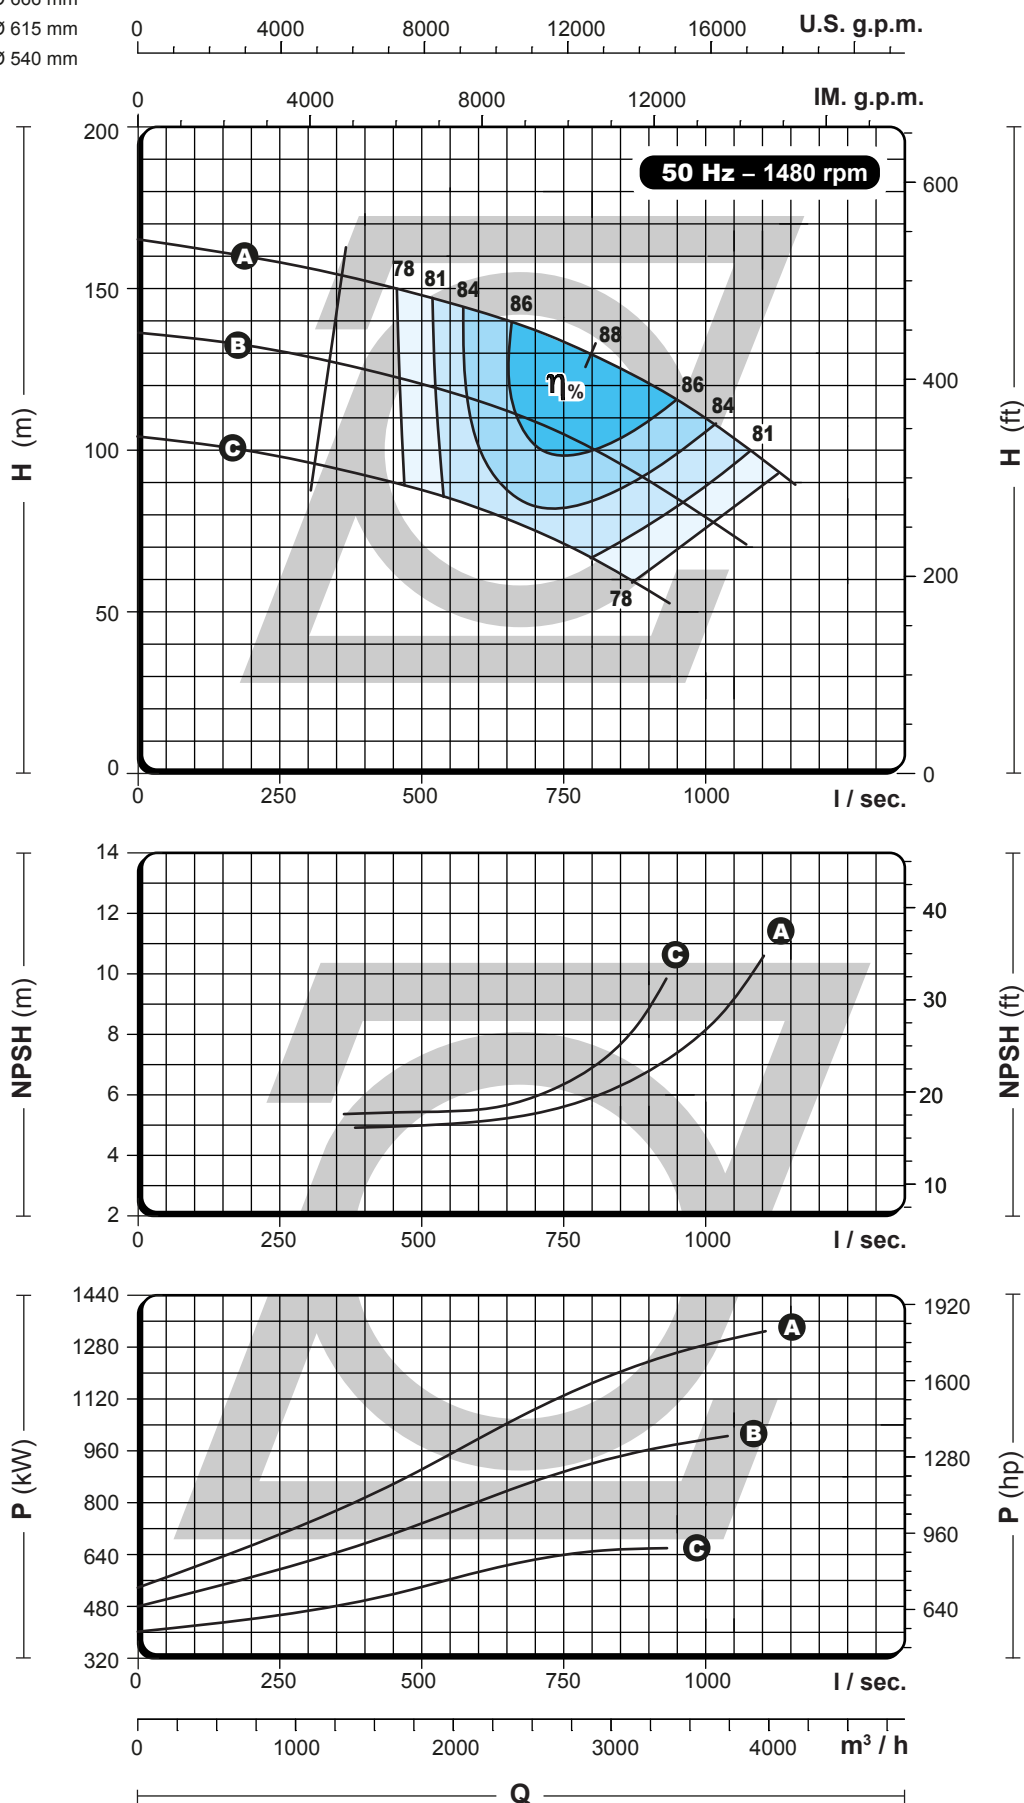

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —




POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



400-350-520

SPLIT CASING CENTRIFUGAL PUMP

A = Ø 558 mm
B = Ø 520 mm
C = Ø 480 mm
D = Ø 440 mm

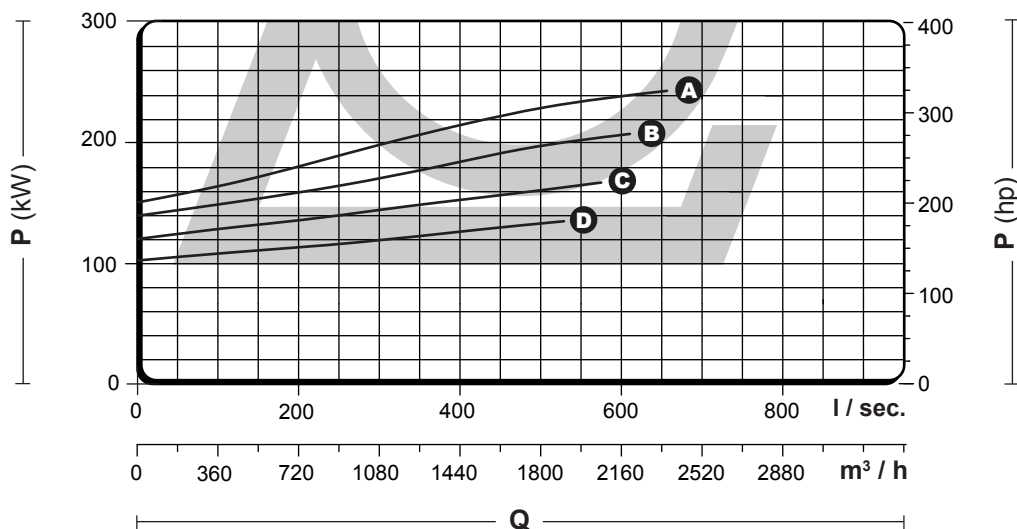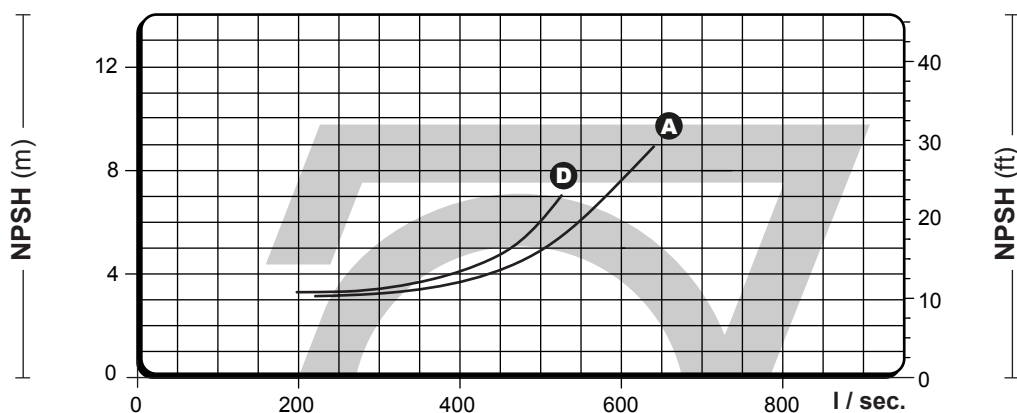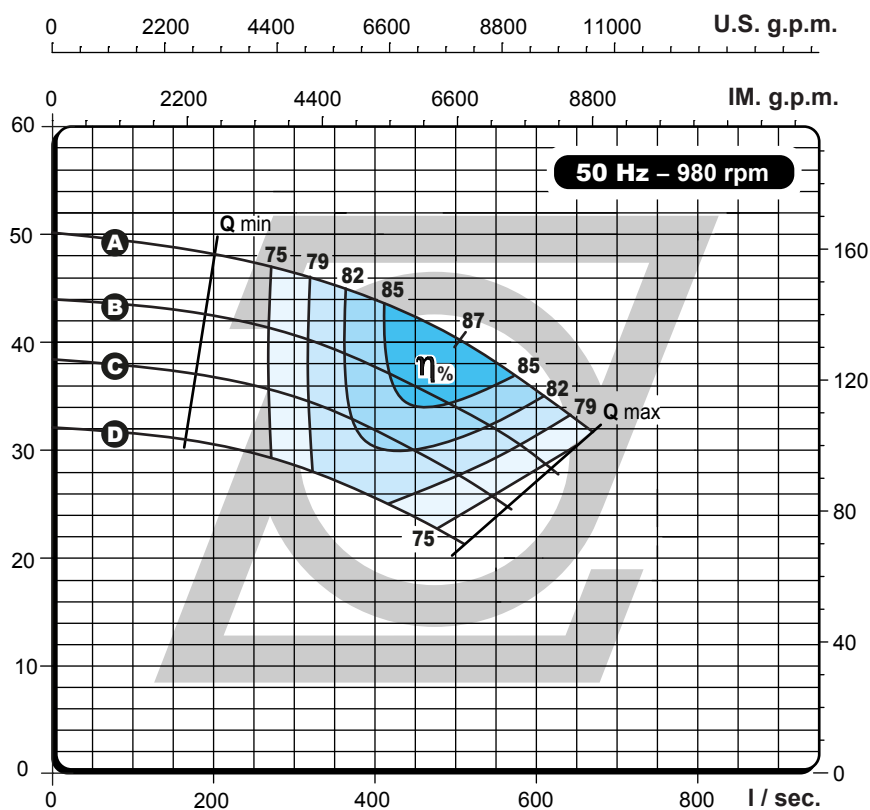

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

single stage double suction




POMPE ZANNI®

PERFORMANCE
CURVES

500-300-920

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 920 mm
B = Ø 830 mm
C = Ø 740 mm

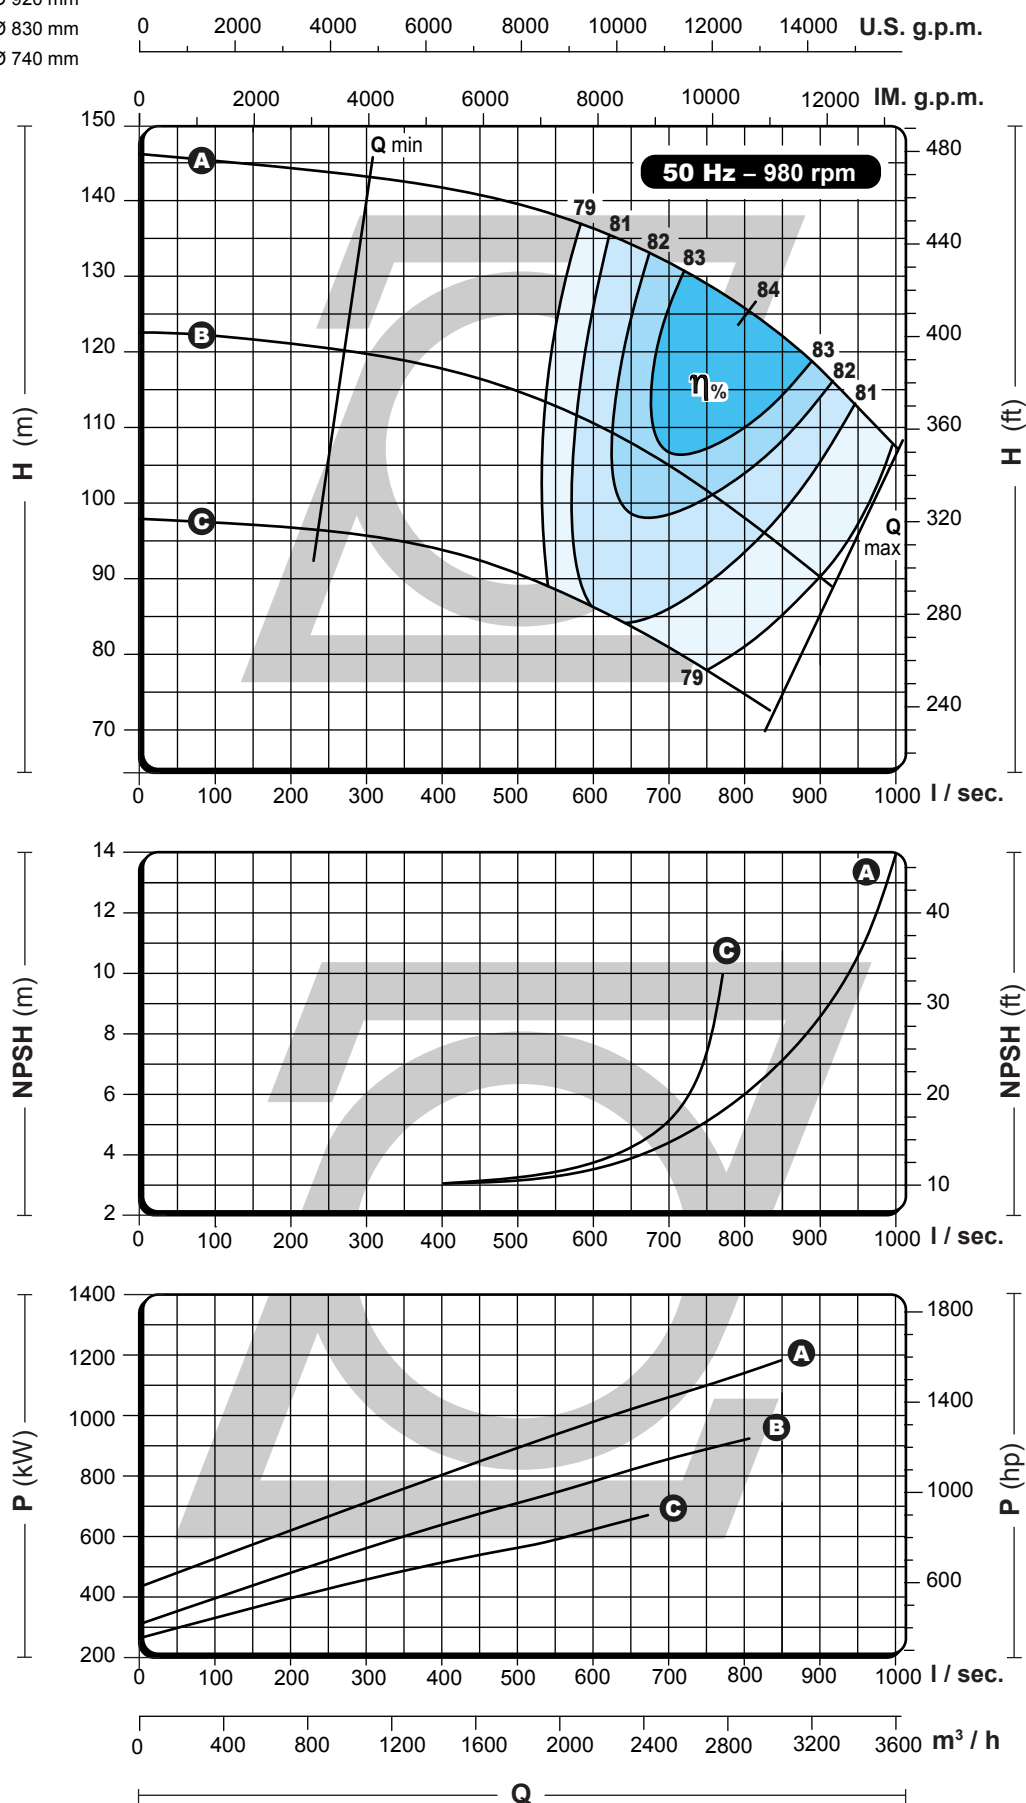

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

500-400-400

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 412 mm
 - B** = Ø 390 mm
 - C** = Ø 372 mm
 - D** = Ø 350 mm

0 2200 4400 6600 8800 11000 U.S. g.p.m.
0 2200 4400 6600 8800 IM. g.p.m.

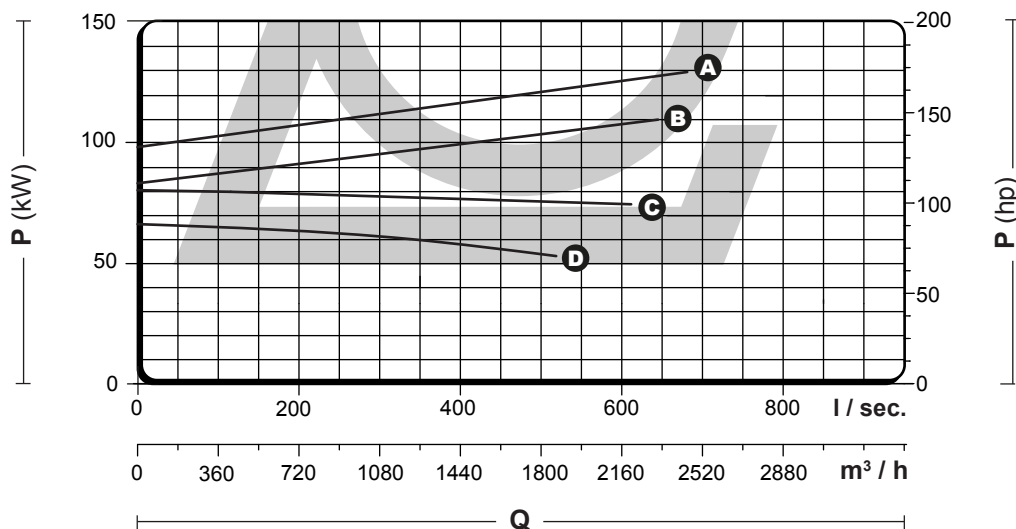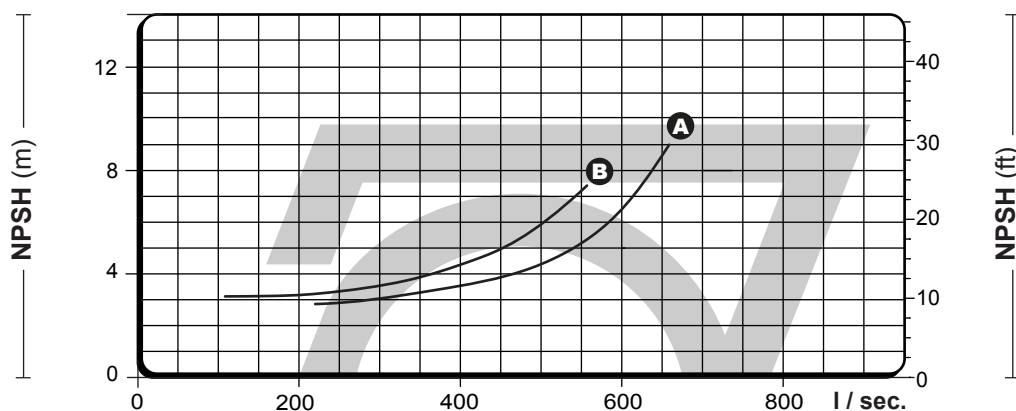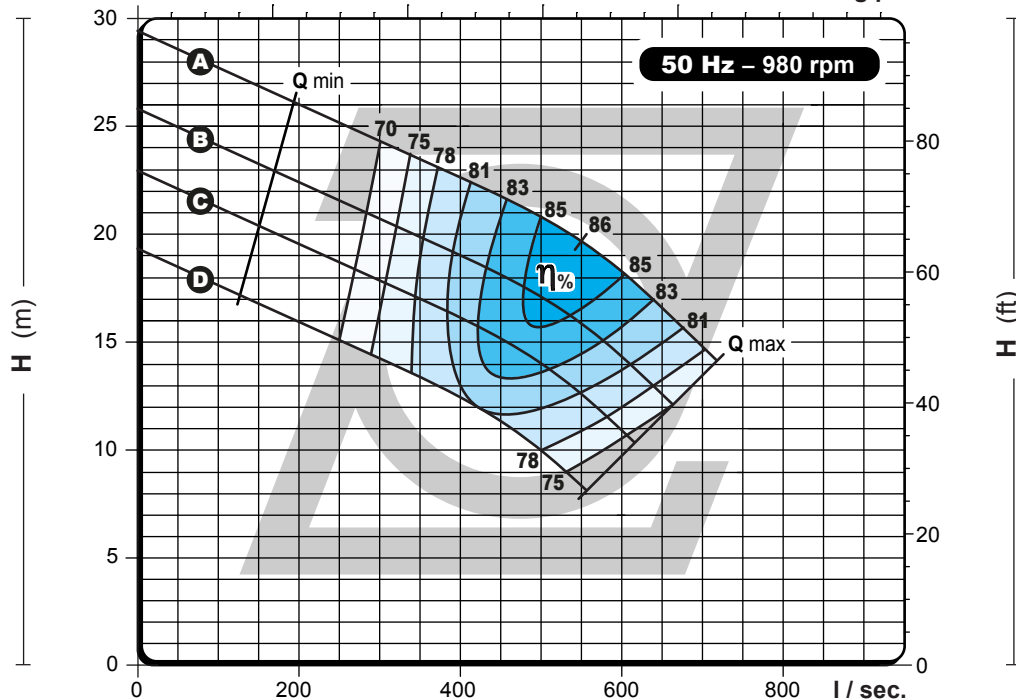

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

500-400-420

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 425 mm
 - B** = Ø 400 mm
 - C** = Ø 375 mm
 - D** = Ø 350 mm

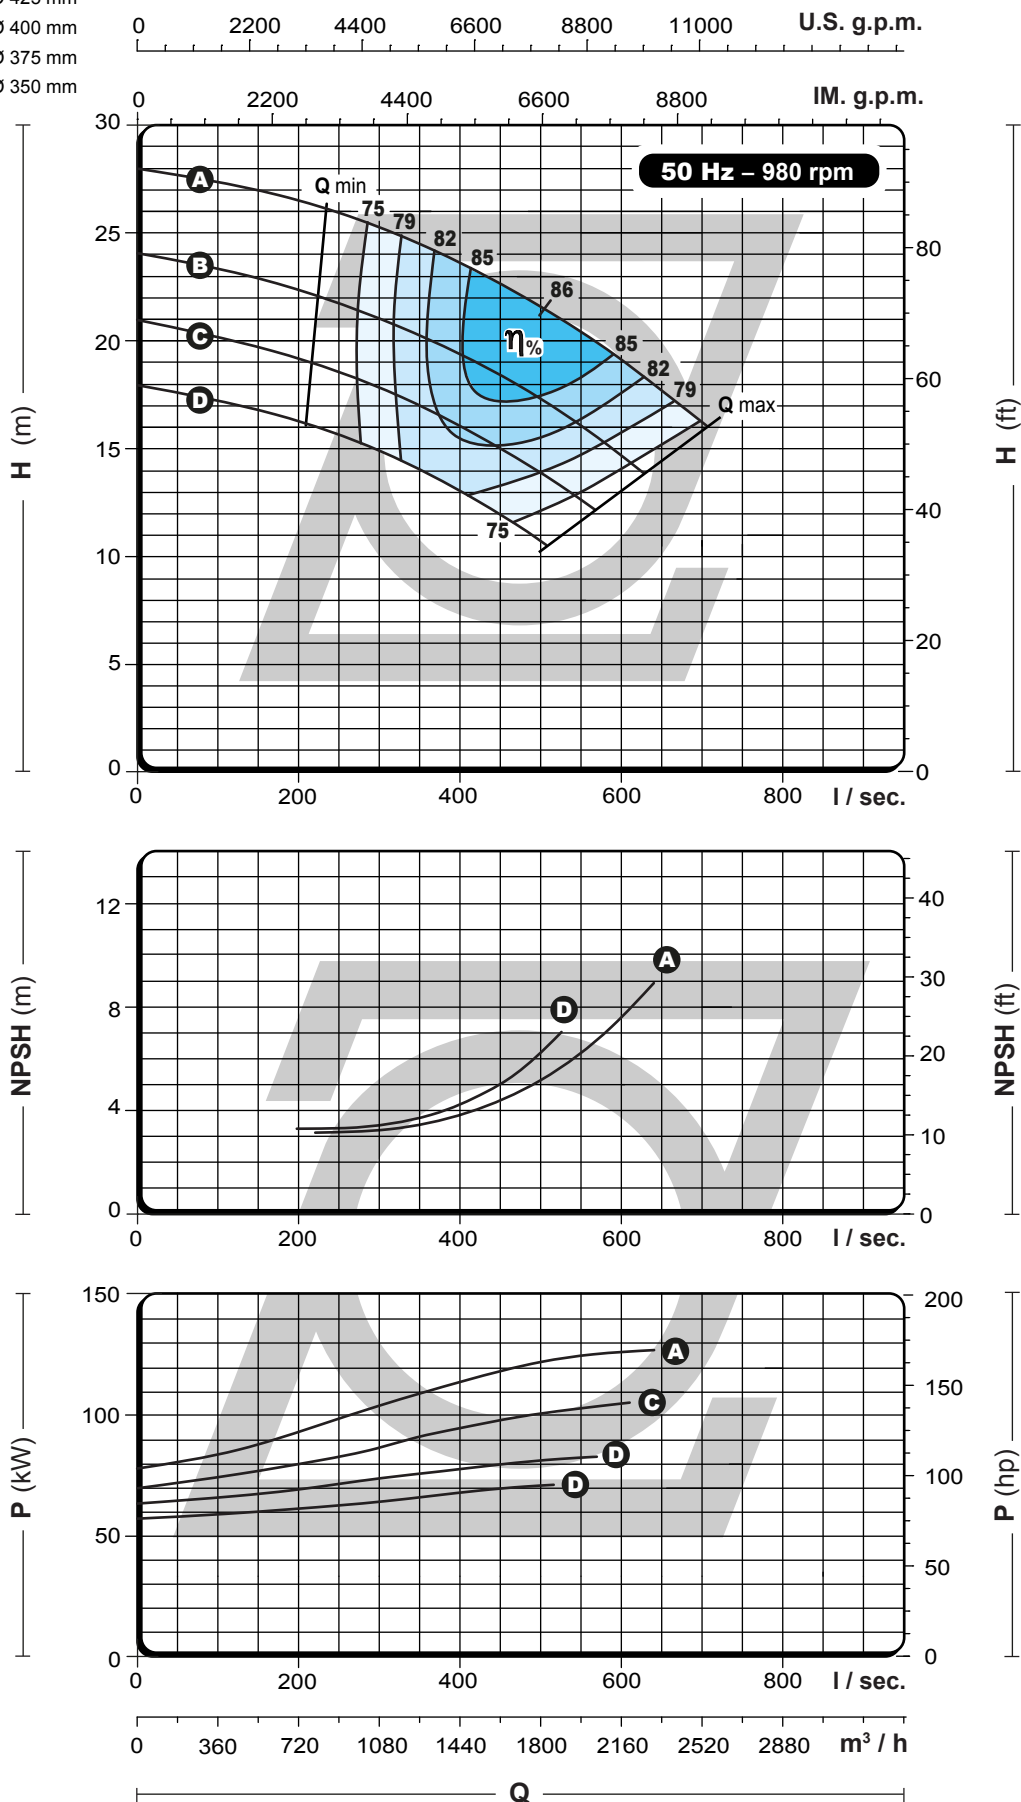

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




500-400-570

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 570 mm
B = Ø 530 mm
C = Ø 490 mm

0 2200 4400 6600 8800 11000 U.S. g.p.m.

0 2200 4400 6600 8800 IM. g.p.m.

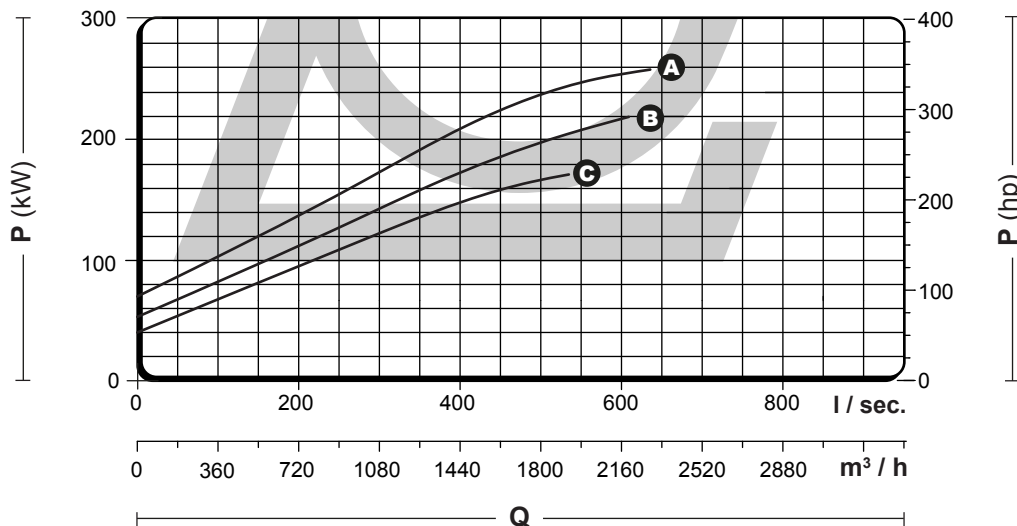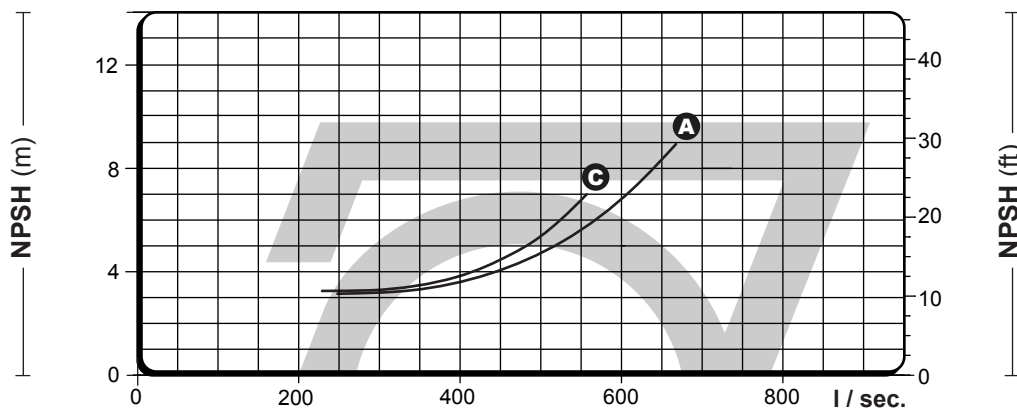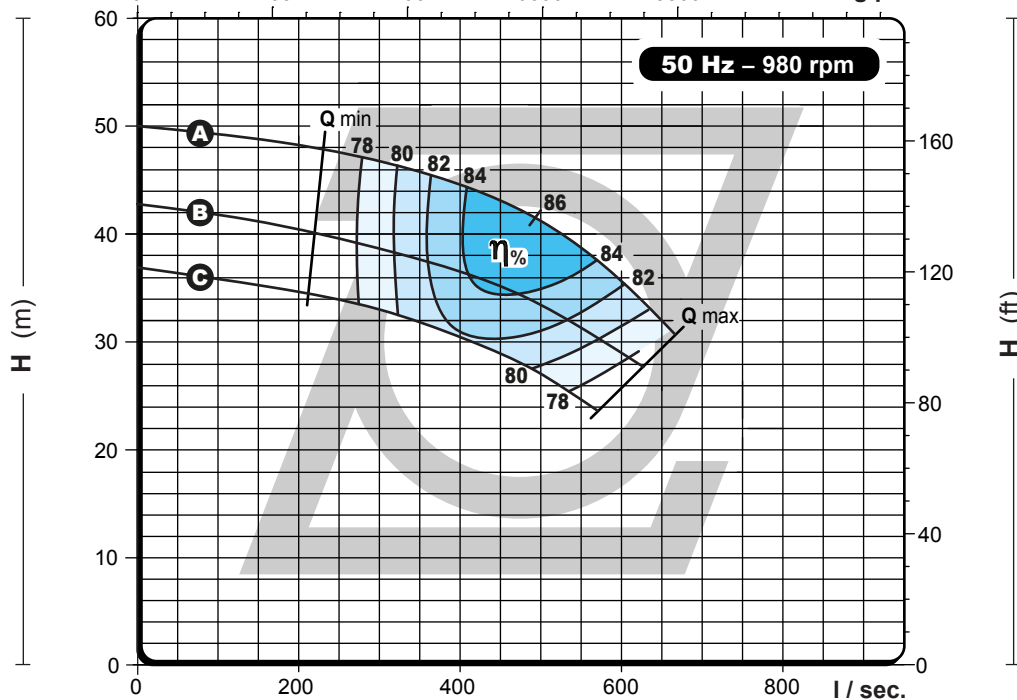

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

500-400-675

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 666 mm
B = Ø 615 mm
C = Ø 540 mm

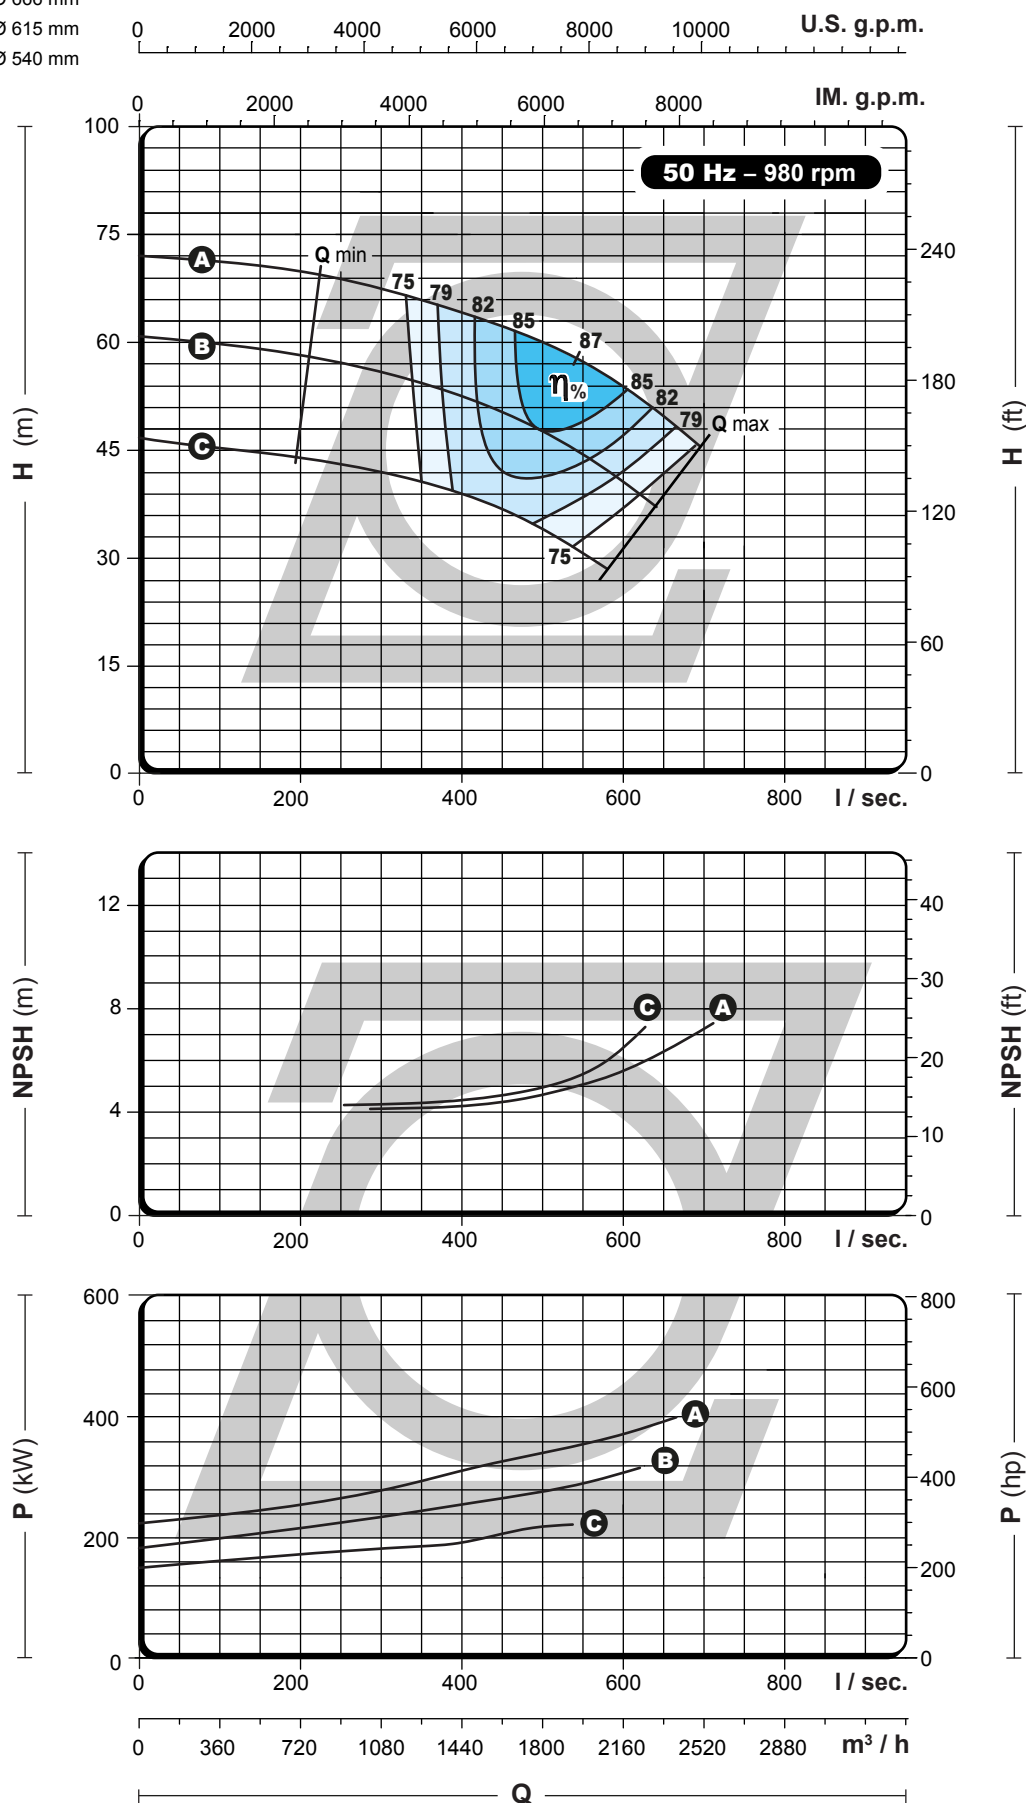

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

600-400-740

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER
A = Ø 740 mm
B = Ø 690 mm
C = Ø 630 mm

0 3000 6000 9000 12000 15000 18000 U.S. g.p.m.

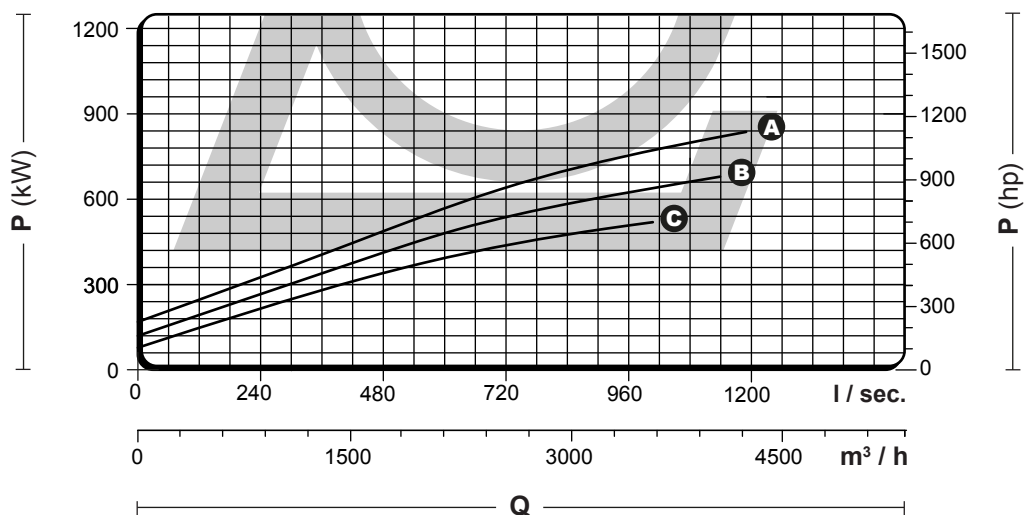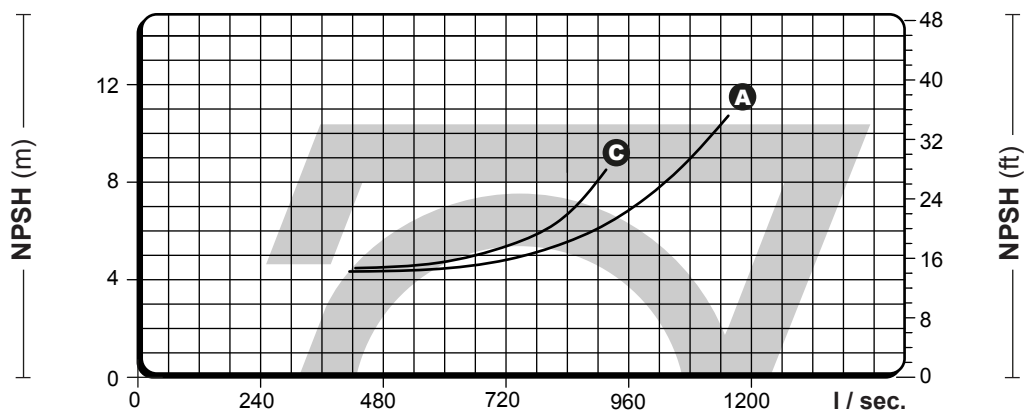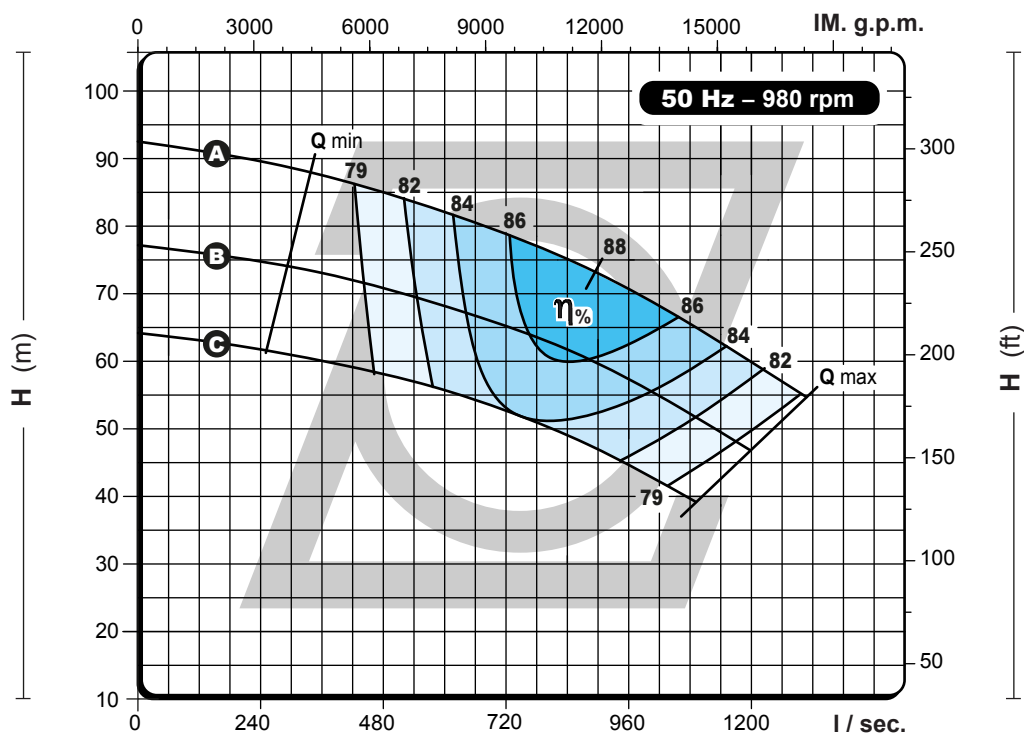

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

600-400-850

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 860 mm
B = Ø 770 mm
C = Ø 700 mm

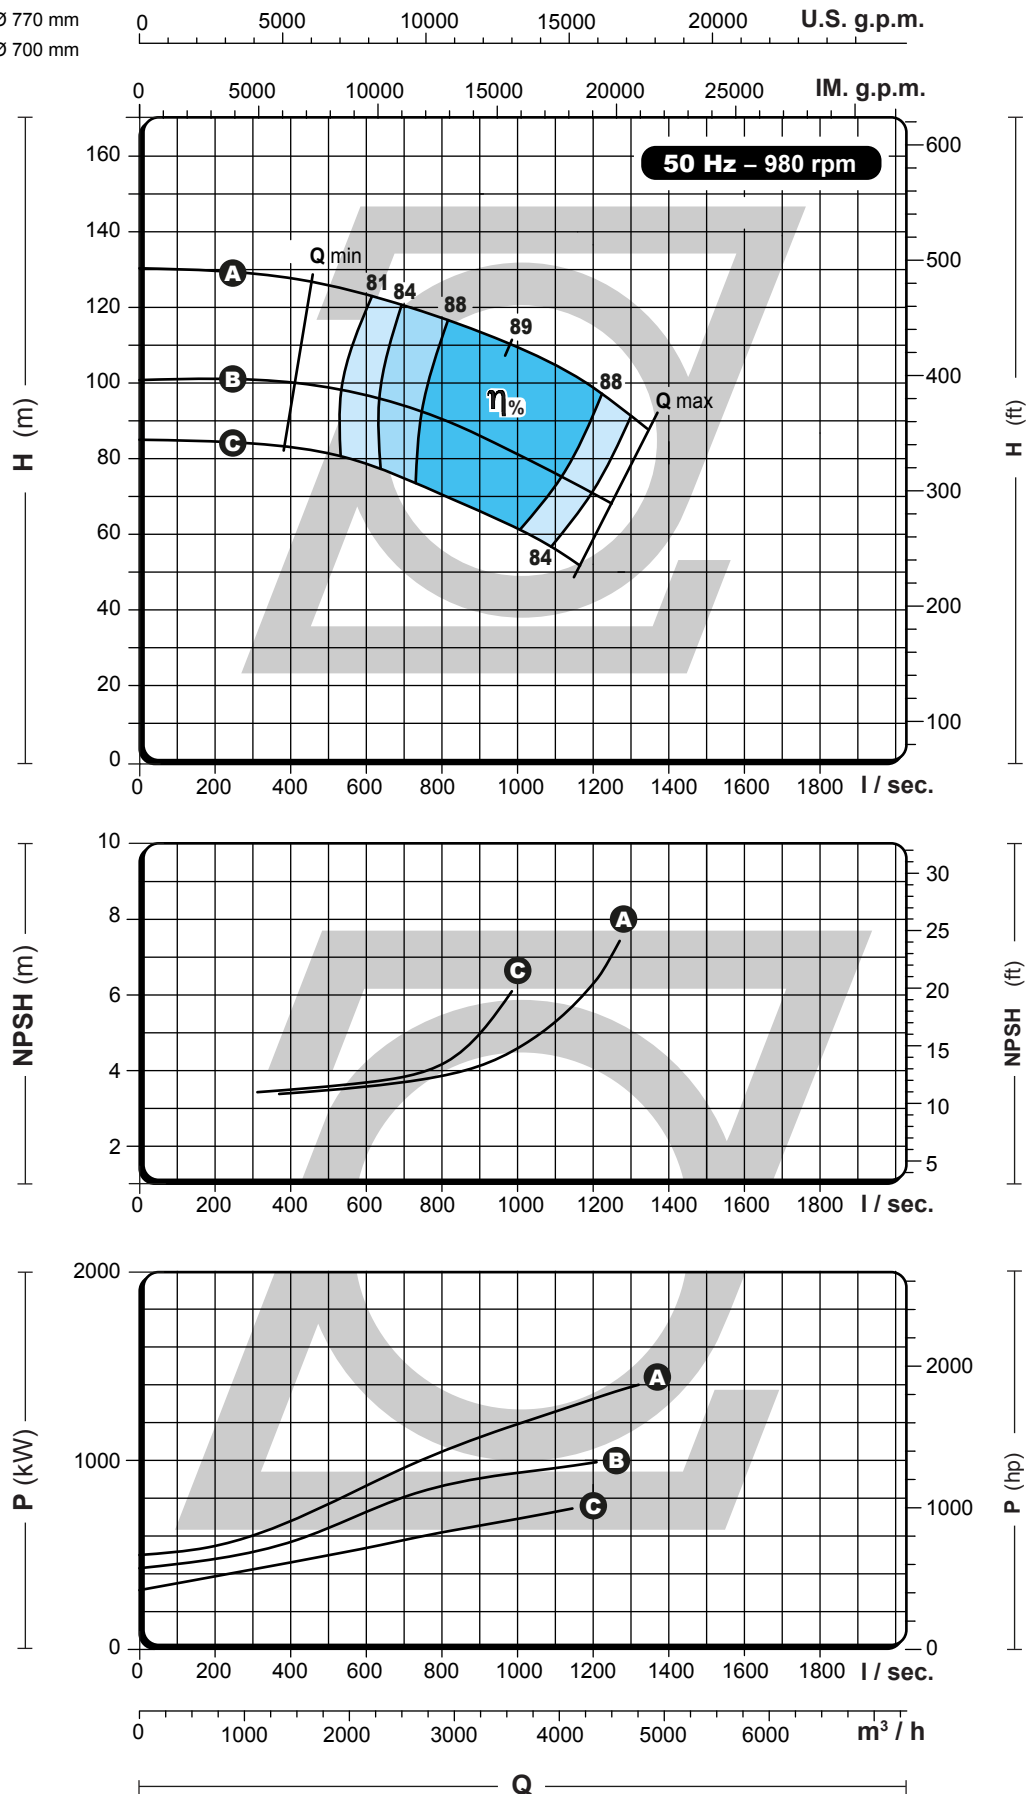

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

600-500-520

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 520 mm
B = Ø 490 mm
C = Ø 460 mm

0 5000 10000 15000 20000 U.S. g.p.m.

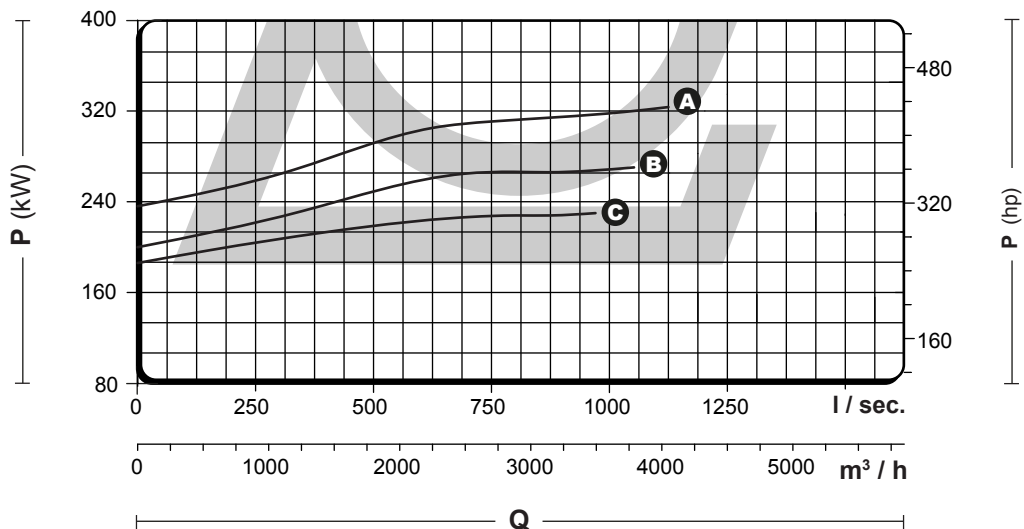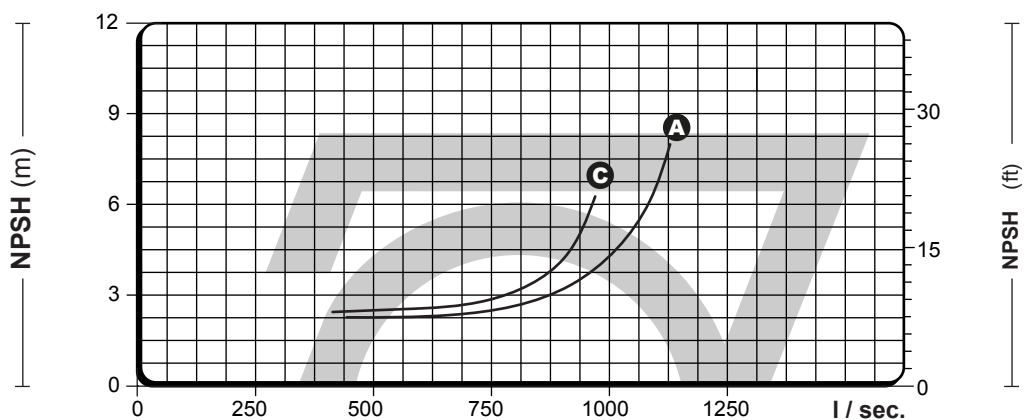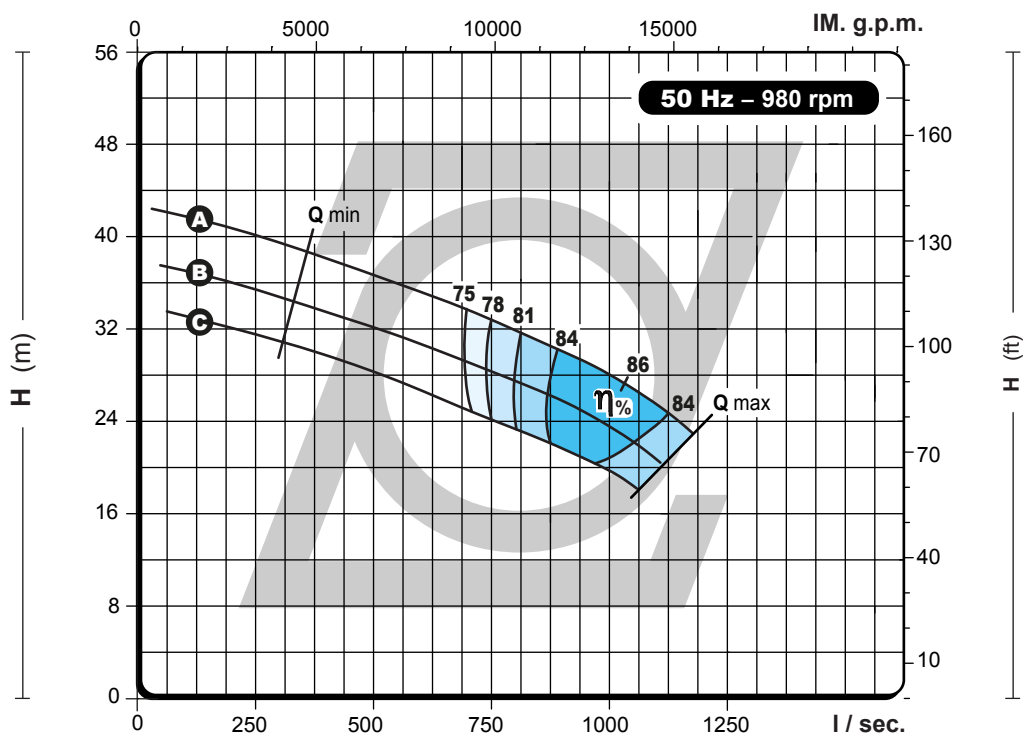

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

600-500-550

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER
A = Ø 570 mm
B = Ø 540 mm
C = Ø 505 mm

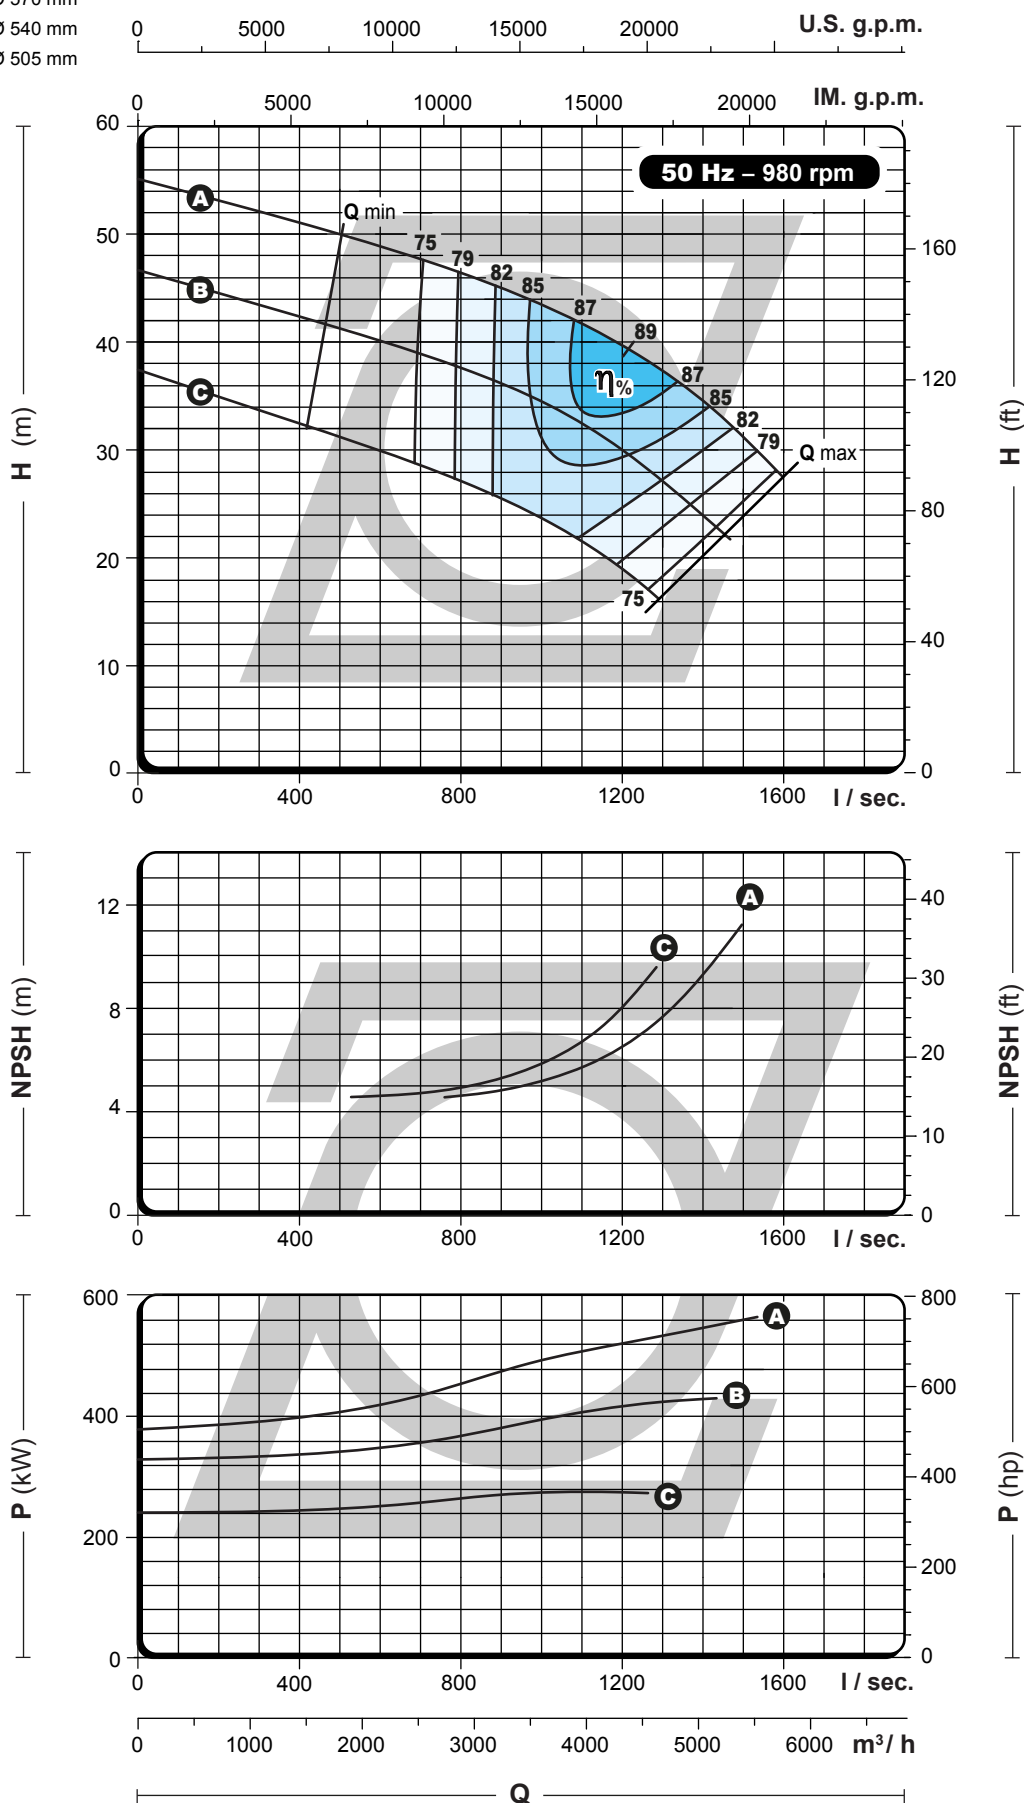

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®




PERFORMANCE
CURVES

600-450-640

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 640 mm
B = Ø 600 mm
C = Ø 560 mm

0 3000 6000 9000 12000 15000 18000 21000 U.S. g.p.m.

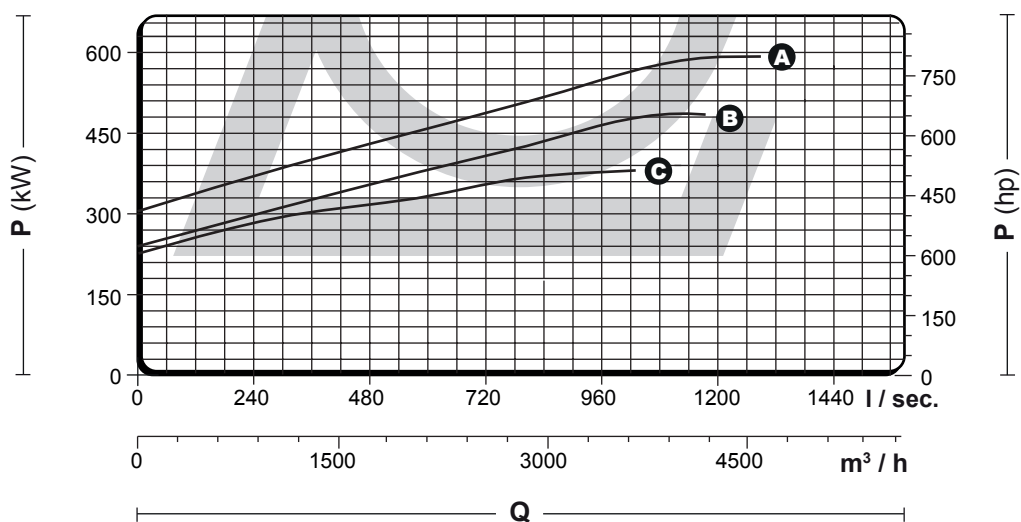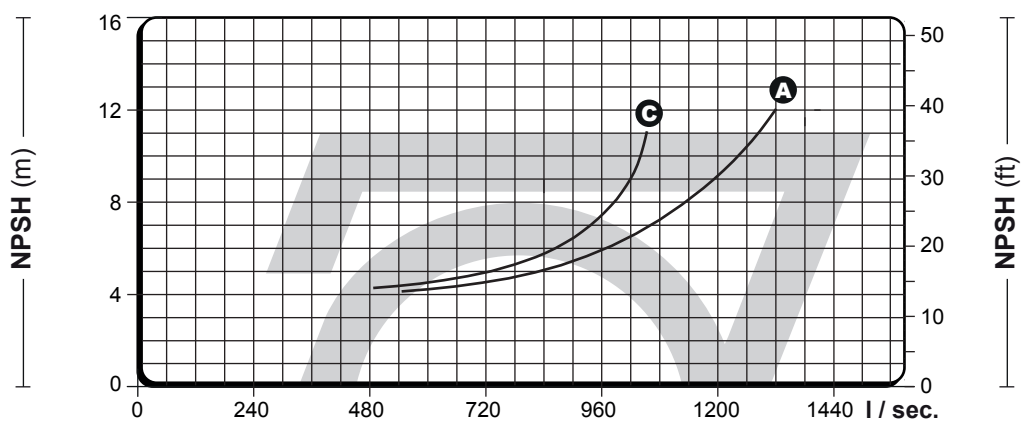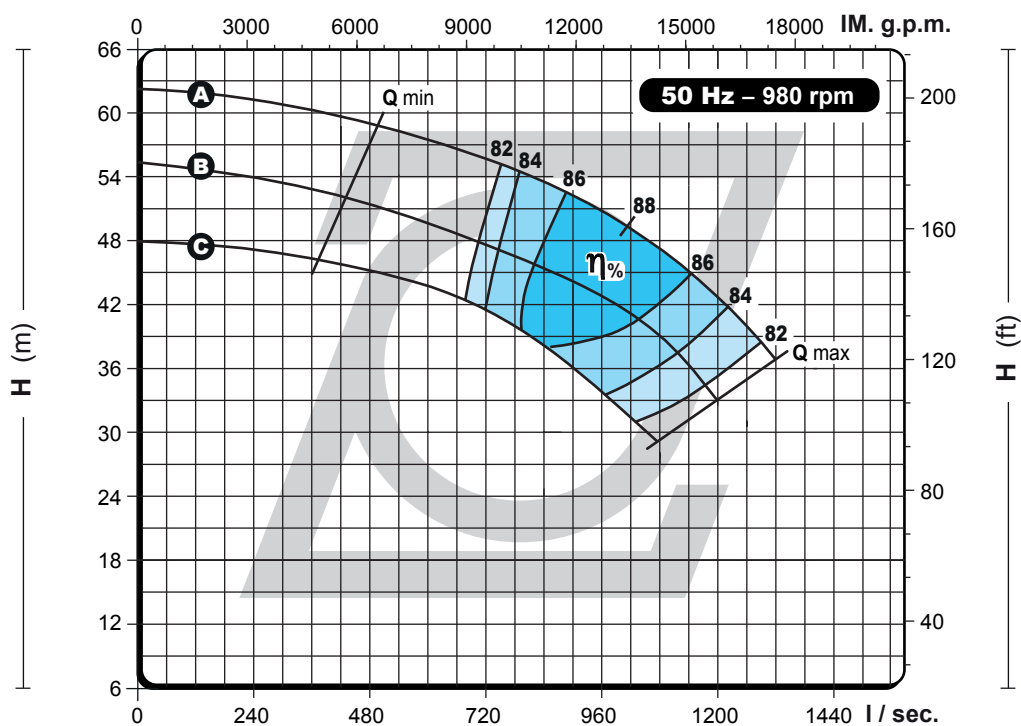

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

700-500-670

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 672 mm
 - B** = Ø 630 mm
 - C** = Ø 600 mm
 - D** = Ø 550 mm

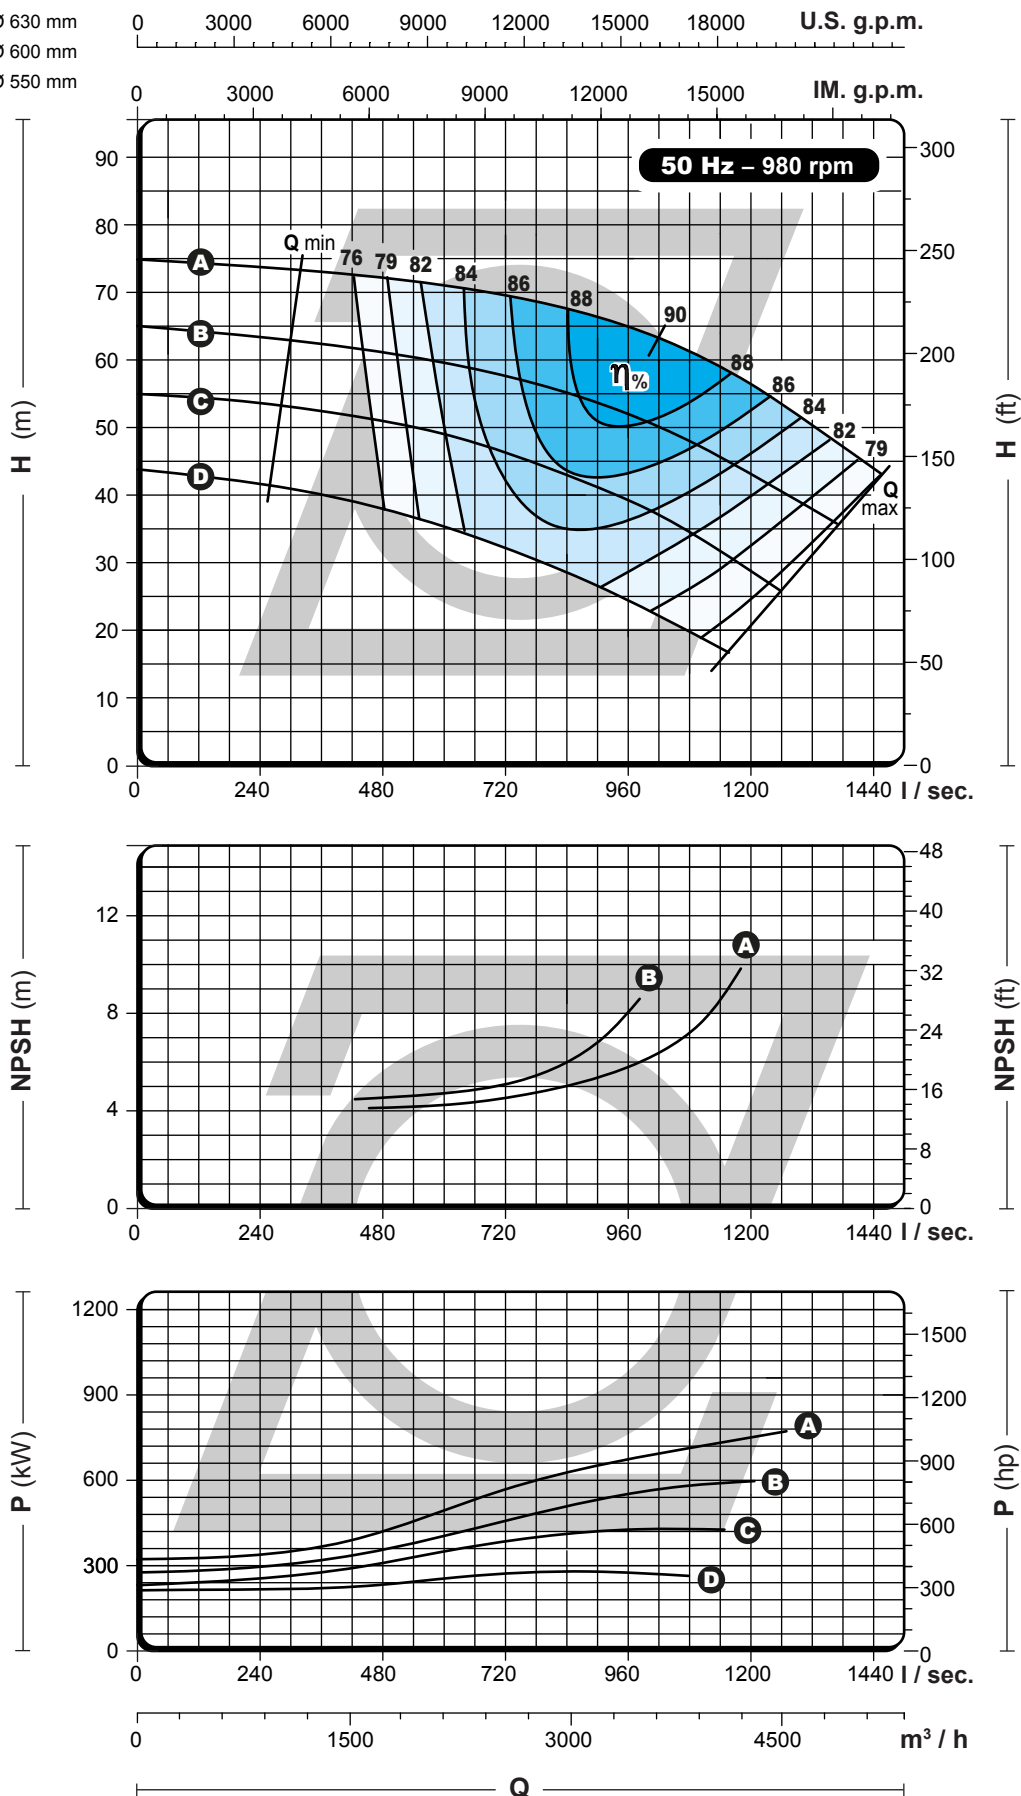

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES




700-500-940

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 940 mm
B = Ø 860 mm
C = Ø 780 mm

0 5000 10000 15000 20000 U.S. g.p.m.

0 5000 10000 15000 20000 25000 IM. g.p.m.

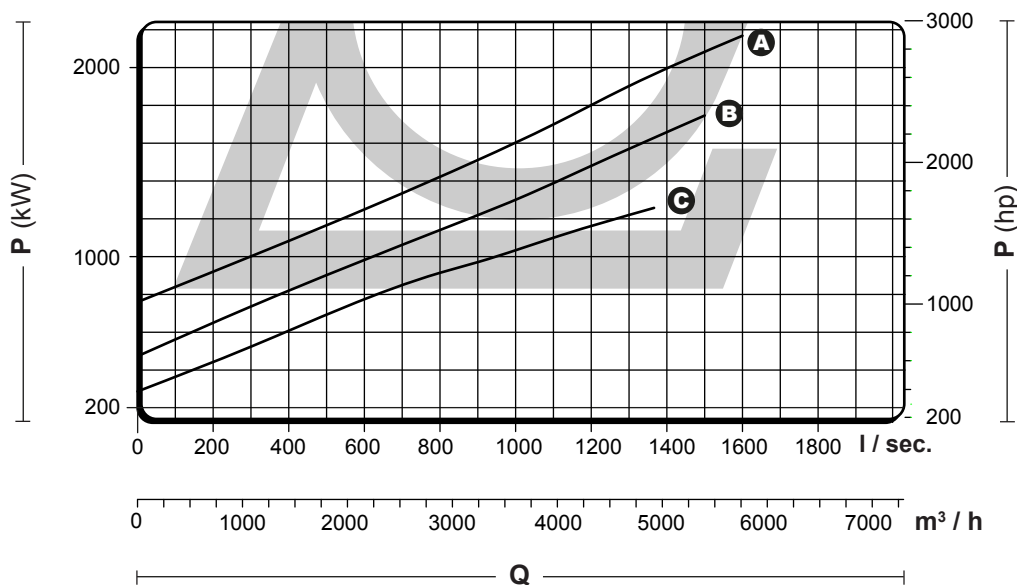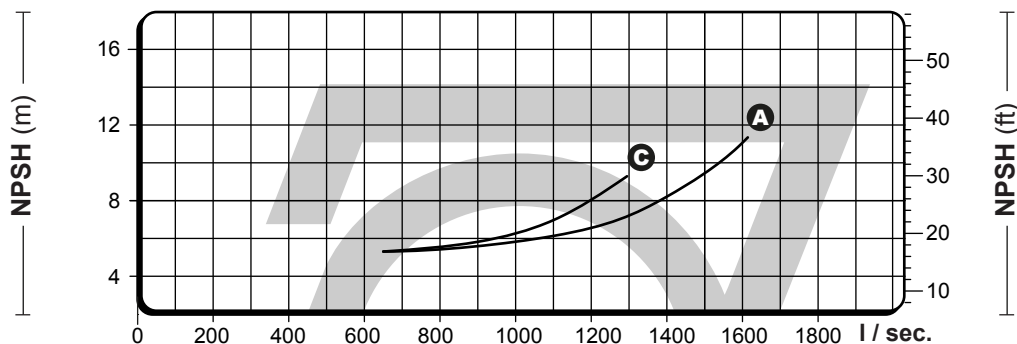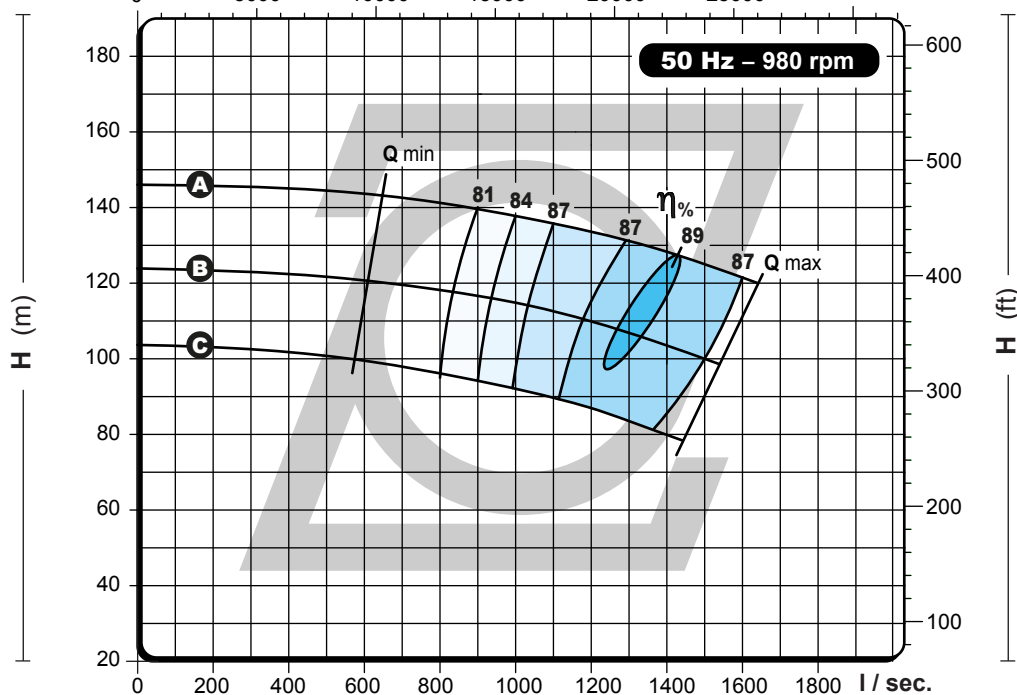

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

700-600-600

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 610 mm
B = Ø 560 mm
C = Ø 510 mm

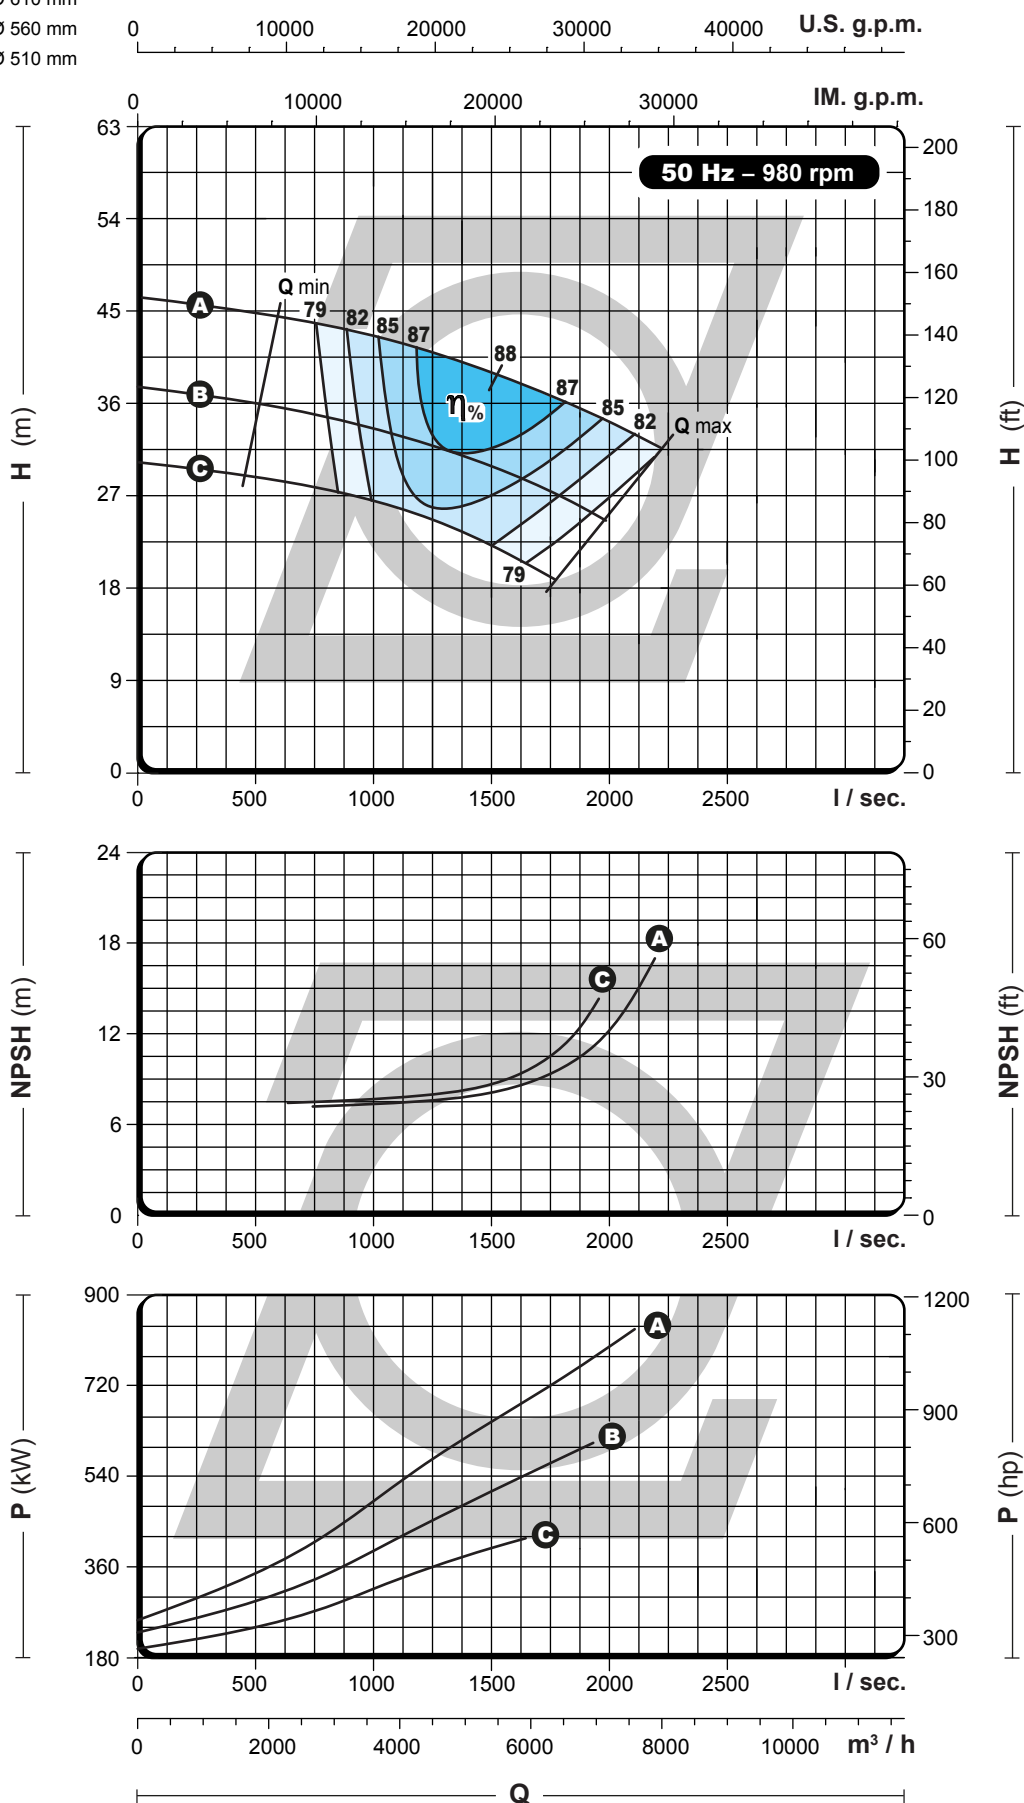

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

700-600-740

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A = Ø 782 mm
 - B = Ø 750 mm
 - C = Ø 730 mm
 - D = Ø 690 mm

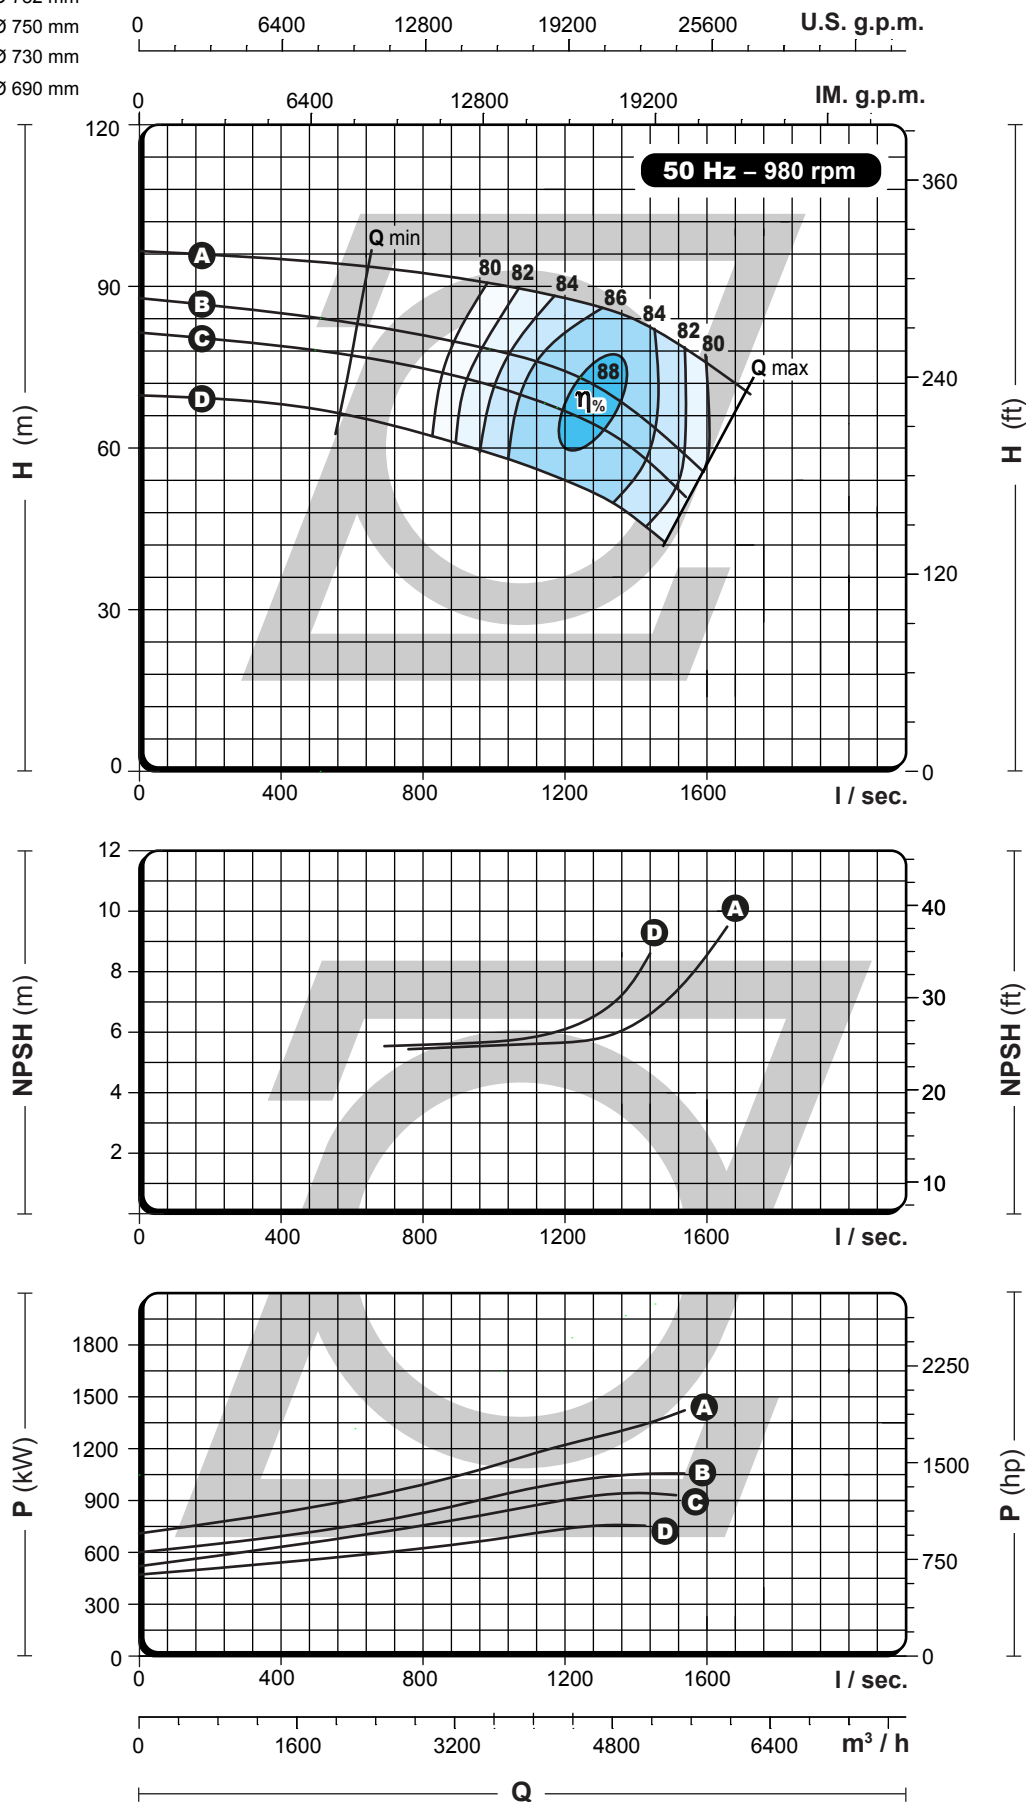

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

600-500-550

SPLIT CASING CENTRIFUGAL PUMP

IMPELLER — **A** = Ø 580 mm
B = Ø 540 mm
C = Ø 500 mm

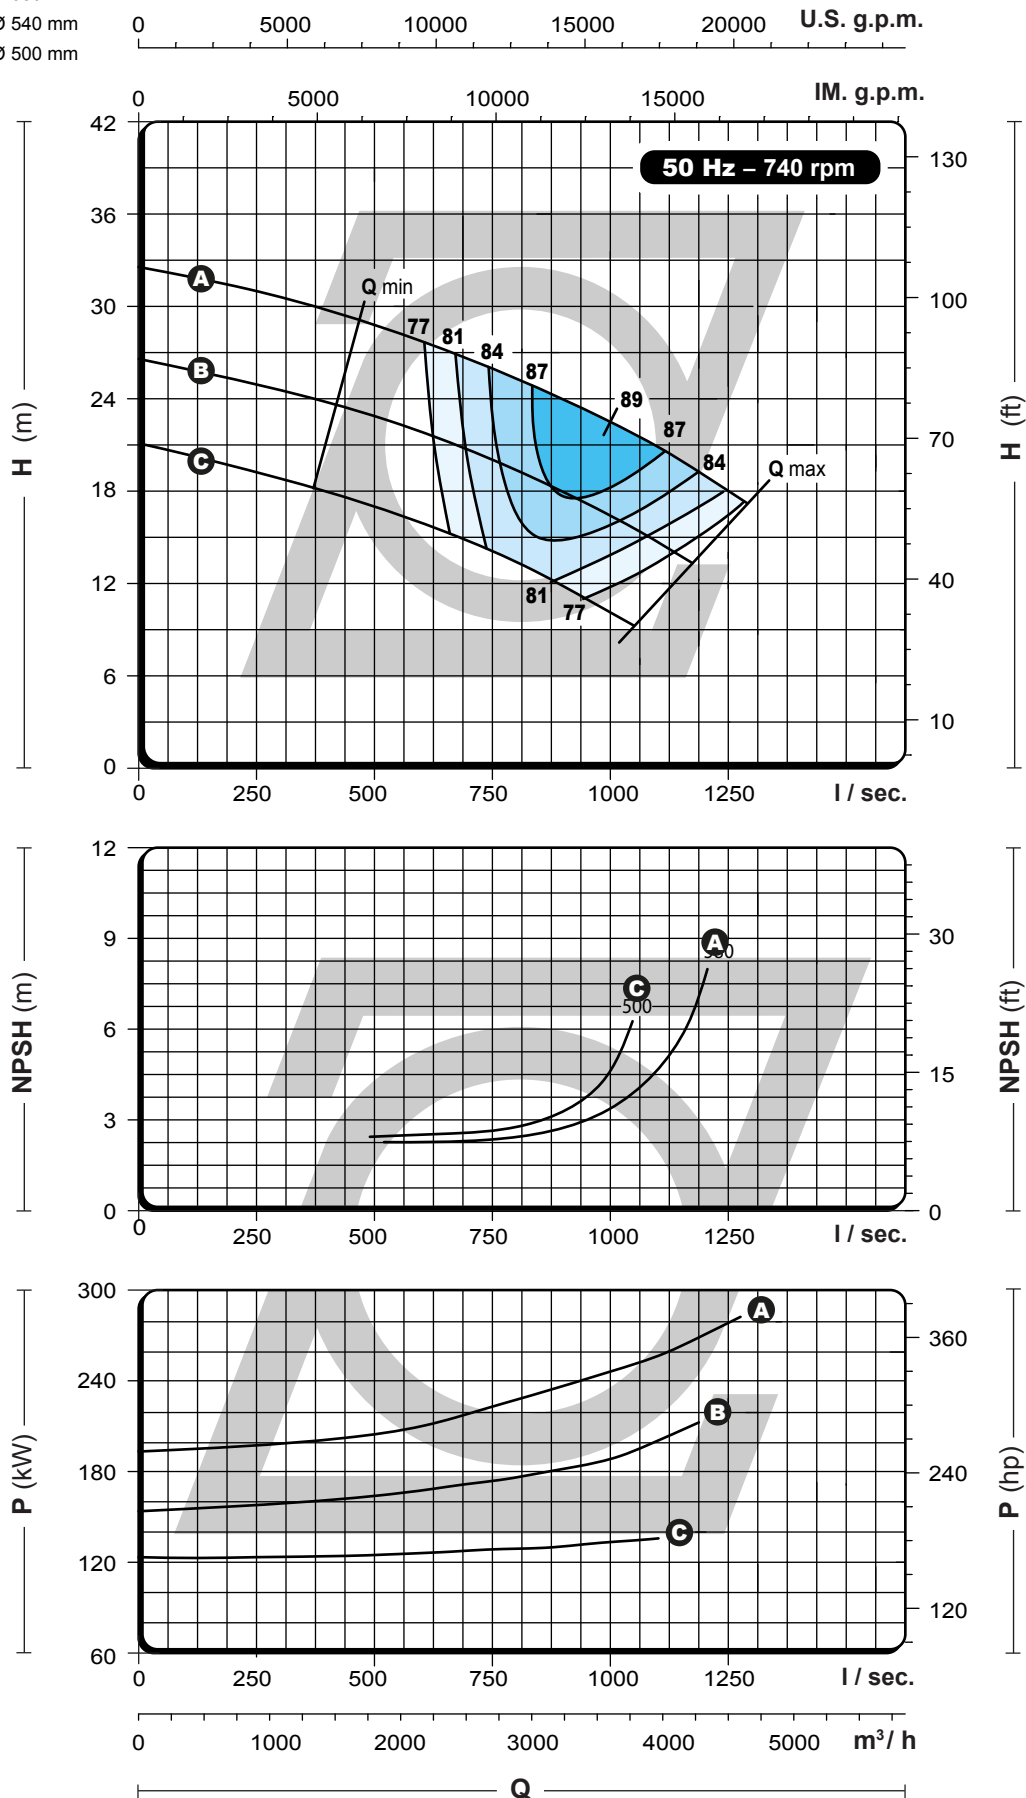

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



POMPE ZANNI®

PERFORMANCE
CURVES

700-600-680




SPLIT CASING CENTRIFUGAL PUMP

IMPELLER

- A** = Ø 702 mm
- B** = Ø 680 mm
- C** = Ø 650 mm
- D** = Ø 620 mm
- E** = Ø 590 mm

0 8000 16000 24000 32000 U.S. g.p.m.

0 8000 16000 24000 IM. g.p.m.

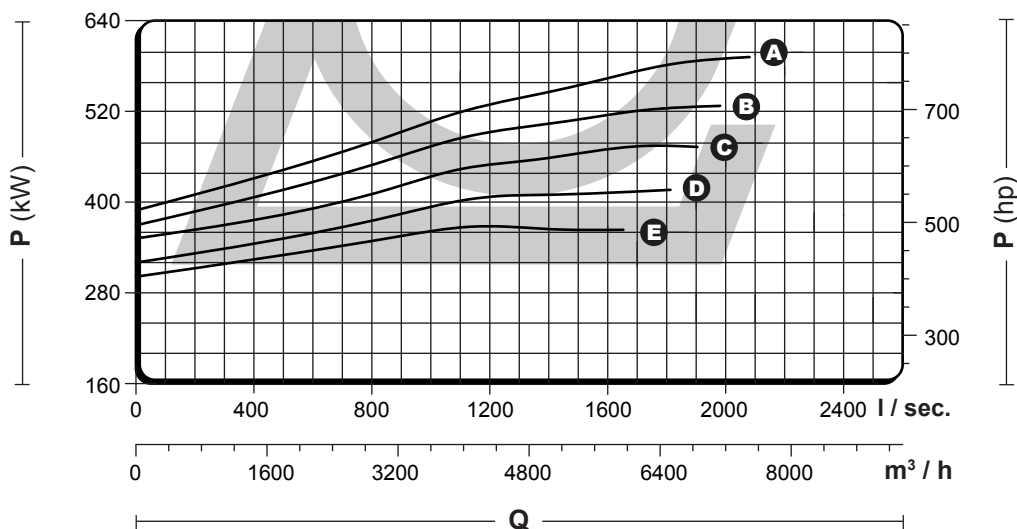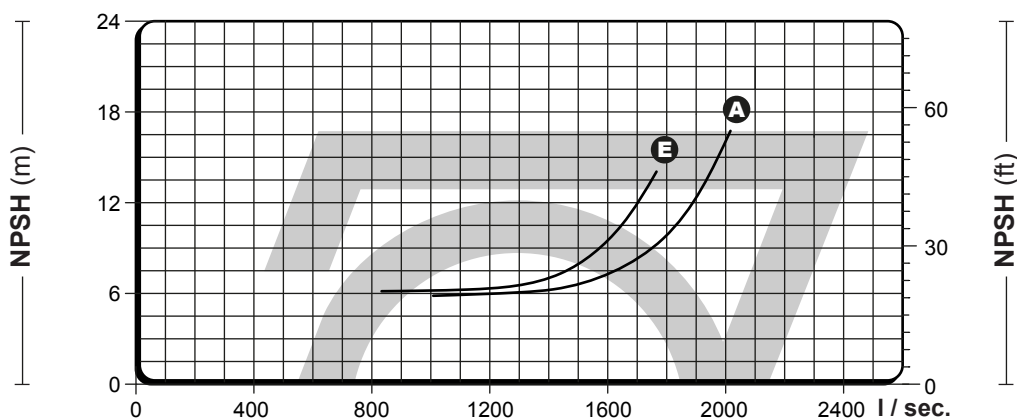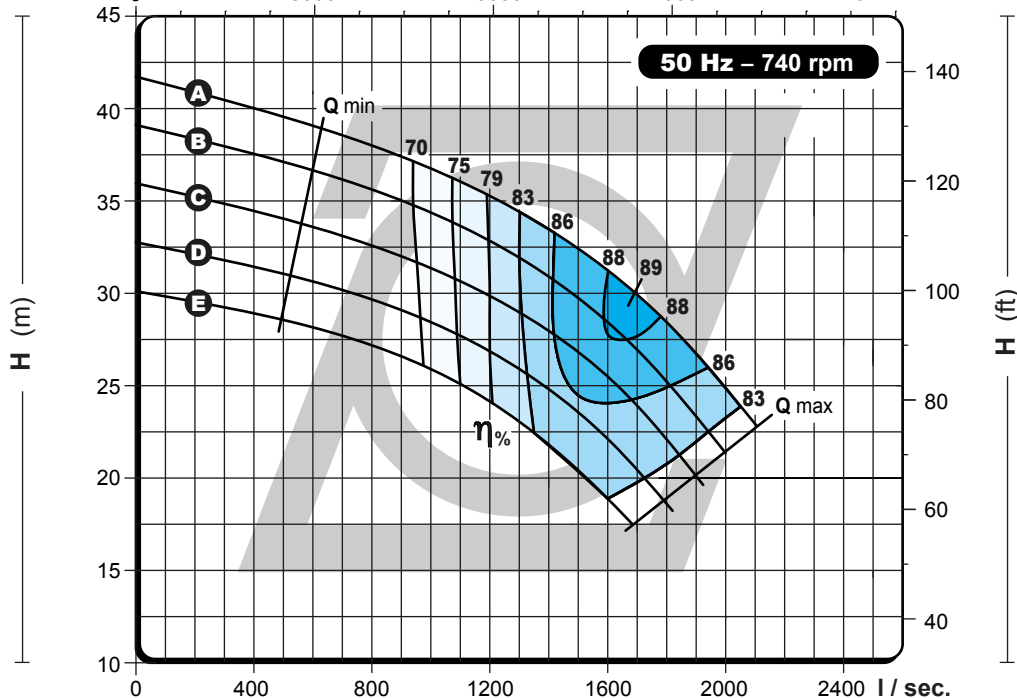

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it




POMPE ZANNI®

PERFORMANCE
CURVES

800-700-750

SPLIT CASING CENTRIFUGAL PUMP

- IMPELLER
- A** = Ø 750 mm
 - B** = Ø 715 mm
 - C** = Ø 680 mm
 - D** = Ø 645 mm

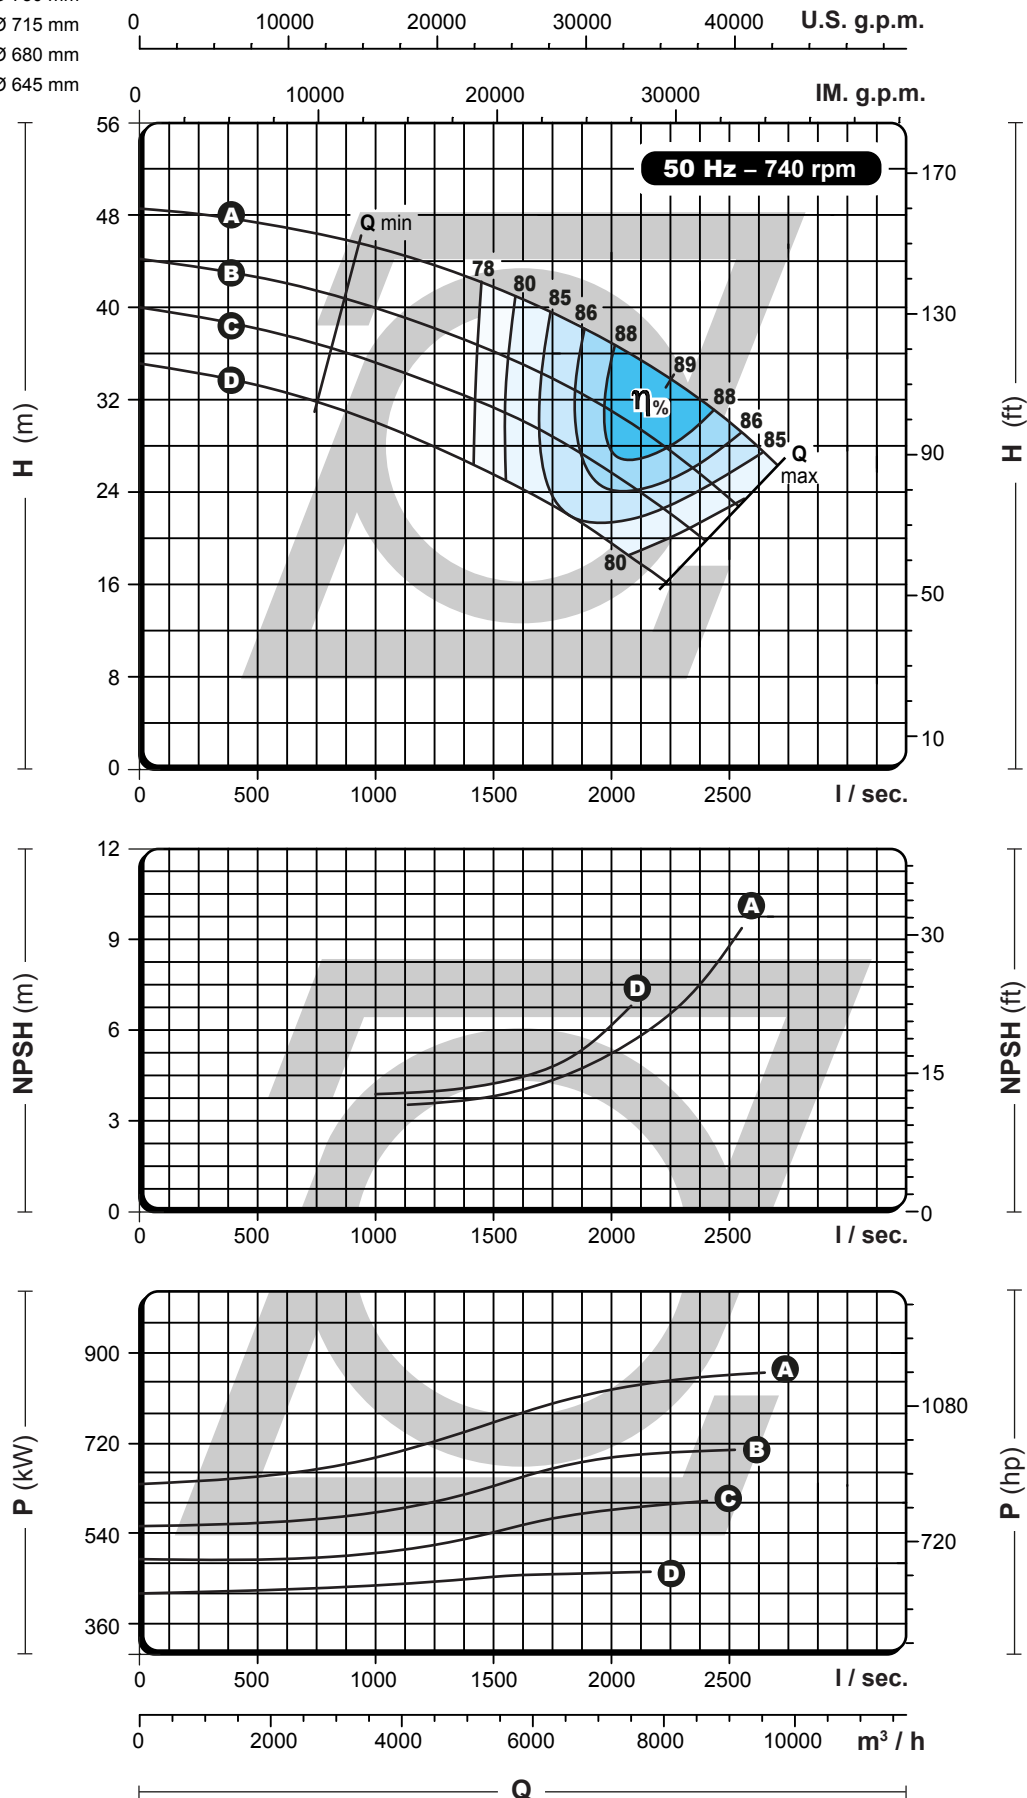

— Head and power ratings apply to media with a density of $\rho = 1 \text{ kg/dm}^3$ and kinetic viscosity of $20 \text{ mm}^2/\text{s}$ —

POMPE ZANNI - Via G. Reni, 5 - 42048 RUBIERA (RE) Italy - www.pompezanni.it - e-mail: info@pompezanni.it



SOCIETA' ITALIANA DI CERTIFICAZIONE INDUSTRIALE
Via Emilia Ospizio 17 - 42122 Reggio Emilia
ITALIA/ITALY

Certificato/Certificate
Prima Emissione/First Issue
Emissione Corrente/Current Issue
Scadenza/Expiry

N° 305/11
18/12/2008
16/12/2011
18/12/2014

Si Certifica che il Sistema di gestione per la Qualità di
We hereby certify that the quality management system operated by

POMPE ZANNI di Gualandri Egidio

42048 RUBIERA (RE) - VIA GUIDO RENI N° 5

Unità operativa / Operative unit

POMPE ZANNI di Gualandri Egidio

42048 RUBIERA (RE) - VIA GUIDO RENI N° 5

E' Conforme alla norma / Is in Compliance with the

UNI EN ISO 9001:2008

Per i seguenti tipi di prodotti - processi - servizi
Concerning the following kinds of product - process - services

Progettazione, fabbricazione, vendita ed assistenza di pompe centrifughe ad asse verticale, orizzontale ed elettropompe sommerse. Commercializzazione di relativi accessori.

Disegn, manufacture and service of centrifugal axis pumps, vertical horizontal and submersible pump. Trade of related accessories.

EA 18

Il Presidente SICI

Documento: 01H001 Revisione 9 Data: 15/03/2006

Il presente certificato è soggetto al rispetto del regolamento SICI, per la certificazione dei sistemi di gestione per la qualità aziendale.

Validità del presente certificato subordinata alla sorveglianza periodica ed al riesame completo del sistema di gestione per la qualità aziendale con periodicità triennale.

E' vietata la riproduzione, anche parziale, con qualsiasi mezzo, compresa la fotocopia, anche ad uso interno o didattico, non autorizzata. Per informazioni puntuali e aggiornate circa eventuali variazioni intervenute nello stato della certificazione di cui al presente

certificato, si prega di contattare il n° 0522/451519 o indirizzo e-mail sici@sici-cert.it
The certified present is subject to the respect of regulation SICI, for the certification of the system of management for the business quality. Validity of the present certified is subordinated to the periodic surveillance and the complete re-examination of the system of management for the business quality with triennial regularity. Is prohibited the reproduction, also partial, with whichever means, comprised the photocopy, also to for internal use only or didactic, non-authorized. For information punctual and modernized approximately eventual variations taken part in the state of the certification of which to the certified present, it is prayed to contact the N° 0522/451519 or address e-mail sici@sici-cert.it



SGQ N° 063 A

Membro di MLA EA per gli SGQ N° 063 A
Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC
Signatory of EA, IAF and ILAC Mutual Recognition Agreements



Via G. Reni, 5 - 42048 Rubiera (RE) ITALY
Telefono +39 0522 626636 / 627456
Fax +39 0522 626604
E-mail: info@pompezanni.it



UNI EN ISO 9001:2008
certificato n° 305/11

